



Introduction fo FPV Series Multilayer Chip Varistor



Multilayer Chip Varistors (MLV) are Transient Voltage Suppressors (TVS) which manufactured from semiconducting ceramics by the highly advanced multilayer formation technologies, which can offer rugged protection, excellent transient energy absorption and internal heat dissipation. The devices are leadless chip form, eliminating lead inductance and guaranteeing a faster speed of response time of less than 0.5ns, which makes them fast enough to ensure reliable protection against ESD pulse and other specific transient events. These transient suppression devices are significantly smaller footprints and lower profiles than traditional zener diodes or radial MOVs.

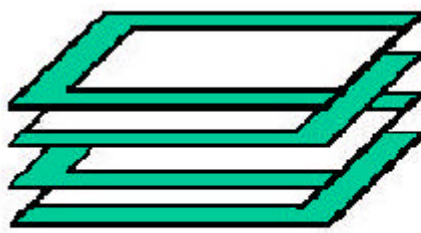

Multilayer Formation Technologies

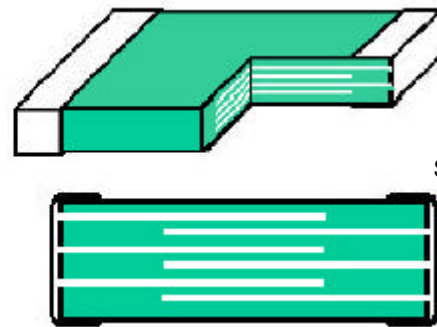

Section of the chip


Features

- Multilayer Ceramic Construction Technology
- Leadless 1005[0402], 1608[0603], 2012[0805], 3216[1206], 3225[1210], 4532[1812], 8063[3225] and 1080[4032] Chip Size
- -55°C to +125°C Operating Temperature Range
- Operating Voltage Range $V_w(\text{DC}) = 3.3\text{V}$ to 615V
- Inherent Bi-directional Clamping
- Suitable for ESD Protection
- Very Low Leakage Current
- Low Inductance, Fast Response (Response time<0.5ns)
- Excellent Temperature Coefficient
- Good Solderability (The electrode termination is selectable in plated and silver /palladium/platinum.)

Information for Designer

Voltage Dependent Characteristic

Transient Voltage Suppressors (Varistors) are voltage-dependent electrical resistors with symmetrical V/I characteristic. Their resistance value decrease with increasing voltage, thus “short-circuiting” further rises in overvoltage.

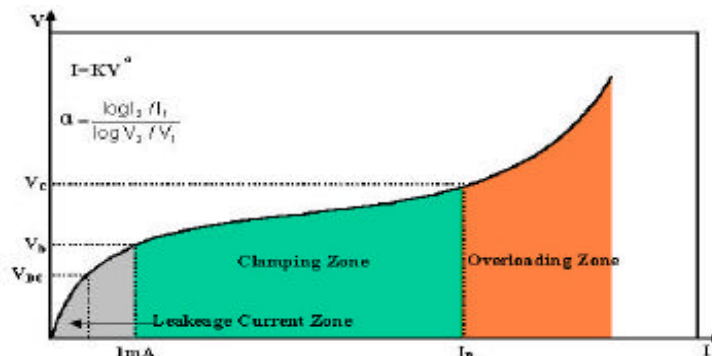

Terms and Descriptions

Working DC Voltage ($V_w(\text{DC})$)

This is the maximum continuous DC voltage, which may be applied up to the maximum operating temperature of the device. The rated DC operating voltage (working voltage) is also used as the reference point for leakage current. This voltage is always less than the breakdown voltage of the device.

Working AC Voltage ($V_w(\text{AC})$)

This is the maximum continuous sinusoidal rms voltage, which maybe applied at any temperature up to the maximum operating temperature of the device.

Maximum Surge Current (Peak Current I_p)

This is the maximum peak current, which may be applied for an 8/20 μ s impulse, with rated line voltage also applied, without causing device failure. The pulse can be applied to the device in either polarity with the same confidence factor.

Maximum Surge Energy (E_s)

This is the maximum rated transient energy which may be dissipated for a single current pulse at a specified impulse duration (10/1000 μ s), with the rated DC or RMS voltage applied, without causing device failure.

leakage (I_L) at Rated DC Voltage

In the no conducting mode, the device is at a very high impedance (approaching 10^9 ohms) and appears as an almost open circuit in the system. The leakage current drawn at this level is very low (<50 μ A at ambient temperature) and, unlike the zener diode, the multilayer varistors have the added advantage that, when operated up to its maximum temperature, its leakage current will not increase above 500 μ A.

Varistor Voltage ($V_B(\text{DC})$)

This is the voltage at which the device changes from the off state to the on state and enters its conduction mode of operation. The voltage is usually characterized at the 1mA point.

Clamping Voltage (V_c)

This is the peak voltage appearing across the suppressor when measured at conditions of specified pulse current and specified waveform (8/20 μ s). It is important to note that the peak current and peak voltage may not necessarily be coincidental in time.


Capacitance (C_p)

This is the capacitance of the device at a specified frequency 1MHz and bias 0.5V

Application

The Prevention of Overvoltage

When the voltage increases above the threshold of MLV, the suppressor will draws a rapidly increasing current, and then the overvoltage is considerably attenuated away from the protection of the equipments should be supplemented by including specific components that will raise the withstand capabilities to the required level. Varistors provide protection against all kind of overvoltage and prevent electronic equipment from being damaged by transient events.

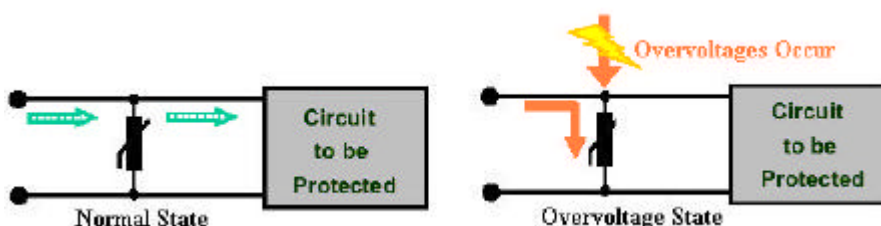

Specific Application

- Suppression of Inductive Switching or Other Transient Events Such as EFT and Surge Voltage at the Circuit Board Level.
- Protection of Components and Circuits Sensitive to ESD Transients Occurring on Power supplies, Control and Signal Lines.
- Provides On-Board Transient Voltage Protection for ICs, CMOS and MOSFET.
- Replace Larger Surface Mount TVS Zeners in Many Applications
- Used to Help Achieve Electromagnetic Compliance of End Products


Part Number Identification

Multilayer Chip Varistor


FPV 160808 G 3R3 P M T

Product Code		Dimensions (L × W × T) (mm)		Product Series		Working DC Voltage		Termination		Tolerance		Packaging Style			
FPV	Multilayer Chip Varistor	100505	1.0×0.5×0.5	E	High energy absorb type	-		P	Plated	K	±10%	T	Tap & Reel		
		160808	1.6×0.8×0.8	L						±15%					
		201209	2.0×1.2×0.9	M						±20%					
		321611	3.2×1.6×1.1	S	Genera type	3R3	3.3V	S	Non-plated Pt/Pd/Ag	M	±20%	B	Bulk		
		322513	3.2×2.5×1.3			250	24V								
		453215	4.5×1.6×1.6			G	High speed type								
		453225	4.5×3.2×2.5												
		8063	8.0×6.3												
		1080	10.2×8.0												

Shape And Dimensions & Equivalent circuit



Equivalent circuit

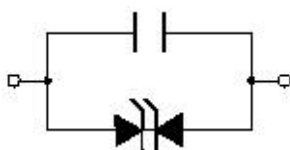

unit : mm(inch)


Part No.	L	W	T	D
100505 (0402)	1.0 ± 0.15 (0.040 ± 0.006)	0.5 ± 0.15 (0.020 ± 0.006)	0.5 ± 0.15 (0.020 ± 0.006)	0.25 ± 0.10 (0.010 ± 0.004)
160808 (0603)	1.6 ± 0.2 (0.063 ± 0.008)	0.8 ± 0.2 (0.031 ± 0.008)	0.8 ± 0.2 (0.031 ± 0.008)	0.3 ± 0.2 (0.01 ± 0.008)
201209 (0805)	2.0 ± 0.2 (0.079 ± 0.008)	1.2 ± 0.2 (0.047 ± 0.008)	0.9 ± 0.2 (0.035 ± 0.008)	0.5 ± 0.3 (0.020 ± 0.012)
201212 (0805)	2.0 ± 0.2 (0.079 ± 0.008)	1.2 ± 0.2 (0.047 ± 0.008)	1.2 ± 0.2 (0.047 ± 0.008)	0.5 ± 0.3 (0.020 ± 0.012)
321611 (1206)	3.2 ± 0.2 (0.126 ± 0.008)	1.6 ± 0.2 (0.063 ± 0.008)	1.1 ± 0.2 (0.043 ± 0.008)	0.5 ± 0.3 (0.020 ± 0.012)
321609 (1206)	3.2 ± 0.2 (0.126 ± 0.008)	1.6 ± 0.2 (0.063 ± 0.008)	0.9 ± 0.2 (0.035 ± 0.008)	0.5 ± 0.3 (0.020 ± 0.012)
322513 (1210)	3.2 ± 0.2 (0.126 ± 0.008)	2.5 ± 0.2 (0.098 ± 0.008)	1.3 ± 0.2 (0.051 ± 0.008)	0.5 ± 0.3 (0.020 ± 0.012)
451616 (1806)	4.5 ± 0.2 (0.186 ± 0.008)	1.6 ± 0.2 (0.063 ± 0.008)	1.6 ± 0.2 (0.063 ± 0.008)	0.5 ± 0.3 (0.020 ± 0.012)
453225 (1812)	4.5 ± 0.2 (0.180 ± 0.008)	3.2 ± 0.2 (0.126 ± 0.008)	2.5 ± 0.2 (0.100 ± 0.008)	0.5 ± 0.3 (0.020 ± 0.012)
8063	8.0 ± 0.3 (0.3 ± 0.012)	6.3 ± 0.3 (0.250 ± 0.012)	1.0~2.5 (0.050~0.100)	0.7 ± 0.3 (0.028 ± 0.012)
1080	10.2 ± 0.3 (0.100 ± 0.012)	8.0 ± 0.3 (0.320 ± 0.012)	1.0~2.5 (0.050~0.100)	0.7 ± 0.3 (0.028 ± 0.012)

Multilayer Chip Varistor Array

CAV 3216-4 G 3R3 P M T

Product Code		Dimensions (L x W x T) (mm)		Product Series		Working DC Voltage		Termination		Tolerance		Packaging Style	
CV A	Multilayer Chip Varistor Array	3216	3.2 x 1.6 x 0.9	S	High Speed type			P	Plated	K	±10%	T	Tap & Reel
		2010	2.0 x 1.0 x 0.5			3R3	3.3V	S	Non-plat ed	L	±15%		
				G	Genera type	250	24V		Pt/Pd/Ag	M	±20%		

Shape And Dimensions & Equivalent circuit

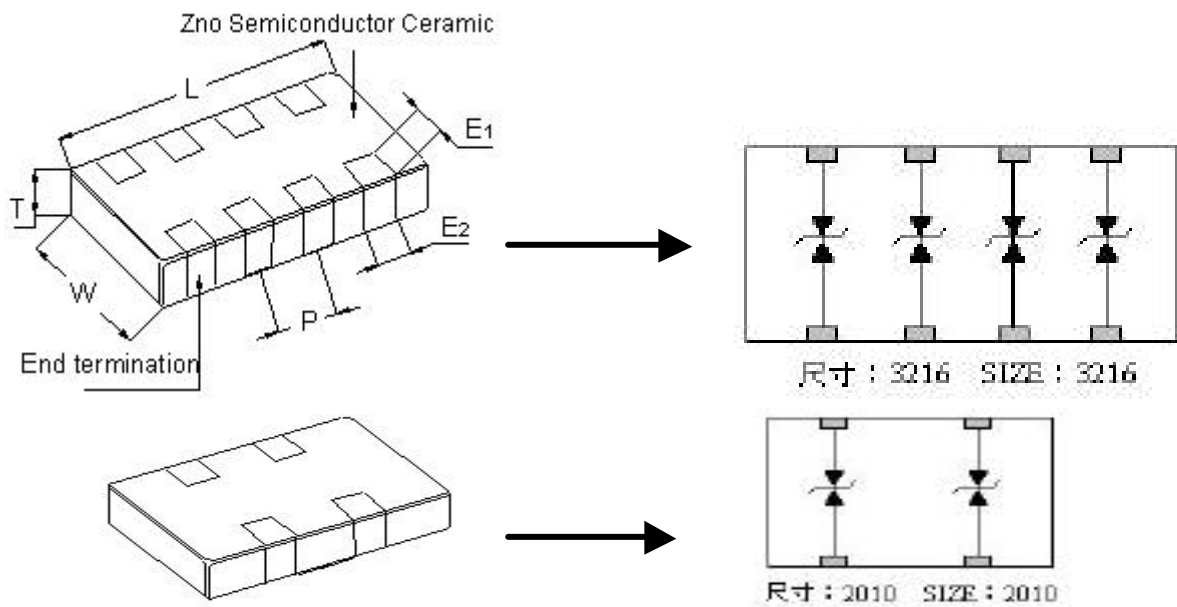

unit : mm(inch)

Part No.	L	W	T	E ₁	E ₂	D
2010 (0804)	2.0 ± 0.15 (0.079 ± 0.008)	1.0 ± 0.15 (0.039 ± 0.006)	0.5 ± 0.1 (0.035 ± 0.008)	0.20 ± 0.15 / -0.1 (0.010 ± 0.006 / -0.004)	2.0 ± 0.15 (0.079 ± 0.006)	2.0 ± 0.15 (0.079 ± 0.006)
3216 (1206)	3.2 ± 0.2 (0.126 ± 0.008)	1.6 ± 0.2 (0.063 ± 0.008)	0.9 ± 0.1 (0.035 ± 0.008)	0.35 ± 0.2 (0.014 ± 0.008)	0.3 ± 0.2 (0.012 ± 0.008)	0.8 ± 0.1 (0.031 ± 0.004)

Specification

Multilayer Chip Varistor General Series

General Series is a major series of FPV Multilayer Chip Varistors (MLV), which can provide widely working voltage, high reliability and suppress varies transient event

- Protection from transient voltage noise in all kinds of IC
- Protection from ESD, EFT and surge in power I/O port
- Replacement of zener diode

1005 (0402) TYPE

1005 PART Number	Working voltage		Varistor voltage @1mA DC		Maximum Clamping Voltage 8/20 μ s 1A	Energy Absorb 10/1000 μ s	Peak Current 8/20 μ s	Typical Capacitance @1MHz
	DC	AC						
	Volts	Volts	V_B	V_B	Volts	Joules	Volts	pF
FPV100505G3R3 M	3.3	2.5	5	$\pm 20\%$	10	0.05	20	450
FPV100505G5R6 M	5.6	4	8	$\pm 20\%$	15.5	0.05	20	360
FPV100505G8R0 M	8	5.7	12	$\pm 20\%$	20	0.05	20	300
FPV100505G9R0 L	9	6.4	13	$\pm 15\%$	20	0.05	20	230
FPV100505G110 L	11	7.8	16	$\pm 15\%$	25	0.05	20	180
FPV100505G120 L	12	8.5	18	$\pm 15\%$	25	0.05	20	150
FPV100505G140 L	14	10	20	$\pm 15\%$	30	0.05	20	120
FPV100505G160 K	16	11.3	22	$\pm 10\%$	35	0.05	20	100
FPV100505G180 K	18	12.7	25	$\pm 10\%$	40	0.05	20	90

1608 (0603) TYPE

1608 PART Number	Working voltage		Varistor voltage @1mA DC		Maximum Clamping Voltage 8/20 μ s 1A	Energy Absorb 10/1000 μ s	Peak Current 8/20 μ s	Typical Capacitance @1MHz
	DC	AC						
	Volts	Volts	V_B	V_B	Volts	Joules	Volts	pF
FPV160808G3R3 M	3.3	2.5	5	$\pm 20\%$	10	0.1	30	1230
FPV160808G5R6 M	5.6	4	8	$\pm 20\%$	15.5	0.1	30	825
FPV160808G8R0 M	8	5.7	12	$\pm 20\%$	20	0.1	30	600
FPV160808G9R0 L	9	6.4	13	$\pm 15\%$	20	0.1	30	550
FPV160808G110 L	11	7.8	16	$\pm 15\%$	25	0.1	30	500
FPV160808G120 L	12	8.5	18	$\pm 15\%$	25	0.1	30	480
FPV160808G140 L	14	10	20	$\pm 15\%$	30	0.1	30	430
FPV160808G160 K	16	11.3	22	$\pm 10\%$	35	0.1	30	300
FPV160808G180 K	18	12.7	25	$\pm 10\%$	40	0.1	30	230
FPV160808G220 K	22	15.6	30	$\pm 10\%$	50	0.1	30	180
FPV160808G240 K	24	17	33	$\pm 10\%$	54	0.1	30	170
FPV160808G260 K	26	18.4	36	$\pm 10\%$	58	0.1	30	160
FPV160808G300 K	30	21.2	42	$\pm 10\%$	65	0.1	30	150

2012 (0805) TYPE

2012 PART Number	Working voltage		Varistor voltage @1mA DC		Maximum Clamping Voltage 8/20 μ s 1A	Energy Absorb 10/1000 μ s	Peak Current 8/20 μ s	Typical Capacitance @1MHz
	DC	AC						
	Volts	Volts	V_B	V_B	Volts	Joules	Volts	pF
FPV2012 G3R3 M	3.3	2.5	5	$\pm 20\%$	10	0.1	40	930
FPV2012 G5R6 M	5.6	4	8	$\pm 20\%$	15.5	0.1	40	860
FPV2012 G8R0 M	8	5.7	12	$\pm 20\%$	20	0.1	40	620
FPV2012 G9R0 L	9	6.4	13	$\pm 15\%$	20	0.1	40	580
FPV2012 G110 L	11	7.8	16	$\pm 15\%$	25	0.1	35	500
FPV2012 G120 L	12	8.5	18	$\pm 15\%$	25	0.1	35	450
FPV2012 G140 L	14	10	20	$\pm 15\%$	30	0.1	35	400
FPV2012 G160 K	16	11.3	22	$\pm 10\%$	35	0.1	35	300
FPV2012 G180 K	18	12.7	25	$\pm 10\%$	40	0.1	35	280
FPV2012 G220 K	22	15.6	30	$\pm 10\%$	50	0.1	35	220
FPV2012 G240 K	24	17	33	$\pm 10\%$	54	0.1	35	180
FPV2012 G260 K	26	18.4	36	$\pm 10\%$	58	0.1	35	110
FPV2012 G300 K	30	21.2	42	$\pm 10\%$	65	0.1	35	80

3216 (1206) TYPE

3216 PART Number	Working voltage		Varistor voltage @1mA DC		Maximum Clamping Voltage _{8/20} μs 1A	Energy Absorb 10/1000 μs	Peak Current 8/20 μs	Typical Capacitance @1MHz
	DC	AC	V _B	V _B				
	Volts	Volts			Volts	Joules	Volts	pF
FPV3216 G3R3 M	3.3	2.5	5	± 20%	10	0.1	40	1500
FPV3216 G5R6 M	5.6	4	8	± 20%	15.5	0.1	40	870
FPV3216 G8R0 M	8	5.7	12	± 20%	20	0.1	40	650
FPV3216 G9R0 L	9	6.4	13	± 15%	20	0.1	40	630
FPV3216 G110 L	11	7.8	16	± 15%	25	0.1	35	600
FPV3216 G120 L	12	8.5	18	± 15%	25	0.1	35	560
FPV3216 G140 L	14	10	20	± 15%	30	0.1	35	500
FPV3216 G160 K	16	11.3	22	± 10%	35	0.1	35	450
FPV3216 G180 K	18	12.7	25	± 10%	40	0.1	35	400
FPV3216 G220 K	22	15.6	30	± 10%	50	0.1	35	300
FPV3216 G240 K	24	17	33	± 10%	54	0.1	35	270
FPV3216 G260 K	26	18.4	36	± 10%	58	0.1	35	250
FPV3216 G300 K	30	21.2	42	± 10%	65	0.1	35	225
FPV3216 G330 K	33	23.3	45	± 10%	72	0.1	35	200
FPV3216 G380 K	38	27	51	± 10%	77	0.1	35	150
FPV3216 G420 K	42	30	56	± 10%	86	0.1	35	120
FPV3216 G480 K	48	34	62	± 10%	100	0.1	35	90
FPV3216 G560 K	56	40	72	± 10%	110	0.1	35	80
FPV3216 G600 K	60	45	76	± 10%	120	0.1	35	70
FPV3216 G680 K	68	48	86	± 10%	130	0.1	35	60

Multilayer Chip Varistor High Energy Absorb Series

High Energy Absorb Series is design to absorb the high energy transient voltage in circuit, which provide high rate current, highly energy absorb ability and fast response speed

Application

- Suppression of Inductive Switching or Other Transient Events Such as EFT and Surge Voltage at the Circuit Board Level.
- Protection of Components and Circuits Sensitive to ESD Transients Occurring on Power supplies, Control and Signal Lines.
- Provides On-Board Transient Voltage Protection for ICs, CMOS and MOSFET.
- Replace Larger Surface Mount TVS Zeners in Many Applications

2012 (0805) TYPE

2012 PART Number	Working voltage		Varistor voltage @1mA DC		Maximum Clamping Voltage 8/20 μ s 1A	Energy Absorb 10/1000 μ s	Peak Current 8/20 μ s	Typical Capacitance @1MHz
	DC	AC						
	Volts	Volts	V _B	V _B	Volts	Joules	Volts	pF
FPV2012 E3R3 M	3.3	2.5	5	±20%	14	0.3	120	4000
FPV2012 E5R6 M	5.6	4	8	±20%	16	0.3	120	2400
FPV2012 E8R0 M	8	5.7	12	±20%	24	0.3	120	1700
FPV2012 E9R0 L	9	6.4	13	±15%	25	0.3	120	1500
FPV2012 E110 L	11	7.8	16	±15%	27	0.3	120	1000
FPV2012 E120 L	12	8.5	18	±15%	28	0.3	120	920
FPV2012 E140 L	14	10	20	±15%	30	0.3	120	820
FPV2012 E160 K	16	11.3	22	±10%	35	0.3	120	600
FPV2012 E180 K	18	12.7	25	±10%	40	0.3	100	500
FPV2012 E220 K	22	15.6	30	±10%	47	0.3	100	350
FPV2012 E240 K	24	17	33	±10%	50	0.3	100	270
FPV2012 E260 K	26	18.4	36	±10%	54	0.3	100	190
FPV2012 E300 K	30	21.2	42	±10%	65	0.3	100	150

3216(1206) TYPE

3216 PART Number	Working voltage		Varistor voltage @1mA DC		Maximum Clamping Voltage 8/20 μ s 1A	Energy Absorb 10/1000 μ s	Peak Current 8/20 μ s	Typical Capacitance @1MHz
	DC	AC						
	Volts	Volts	V _B	V _B	Volts	Joules	Volts	pF
FPV3216 E3R3 M	3.3	2.5	5	±20%	14	0.4	150	3800
FPV3216 E5R6 M	5.6	4	8	±20%	16	0.4	150	2300
FPV3216 E8R0 M	8	5.7	12	±20%	24	0.4	150	1800
FPV3216 E9R0 L	9	6.4	13	±15%	25	0.4	150	1700
FPV3216 E110 L	11	7.8	16	±15%	27	0.4	150	1300
FPV3216 E120 L	12	8.5	18	±15%	28	0.4	150	1200
FPV3216 E140 L	14	10	20	±15%	30	0.4	150	900
FPV3216 E160 K	16	11.3	22	±10%	35	0.4	150	780
FPV3216 E180 K	18	12.7	25	±10%	40	0.4	150	635
FPV3216 E220 K	22	15.6	30	±10%	47	0.4	150	550
FPV3216 E240 K	24	17	33	±10%	50	0.4	150	500
FPV3216 E260 K	26	18.4	36	±10%	54	0.4	120	450
FPV3216 E300 K	30	21.2	42	±10%	65	0.4	120	400
FPV3216 E330 K	33	23.3	45	±10%	72	0.4	120	350
FPV3216 E380 K	38	27	51	±10%	77	0.4	120	300
FPV3216 E420 K	42	30	56	±10%	86	0.4	120	250
FPV3216 E480 K	48	34	62	±10%	100	0.4	120	185
FPV3216 E560 K	56	40	72	±10%	110	0.4	120	165
FPV3216 E600 K	60	45	76	±10%	120	0.4	120	150
FPV3216 E680 K	68	48	86	±10%	130	0.4	120	135

3225(1210) TYPE

3225 PART Number	Working voltage		Varistor voltage @1mA DC		Maximum Clamping Voltage8/20 μs 1A	Energy Absorb 10/1000 μs	Peak Current 8/20 μs	Typical Capacitance @1MHz
	DC	AC						
	Volts	Volts	V _B	V _B	Volts	Joules	Volts	pF
FPV3225 E180 K	18	12.7	25	± 10%	38	1.5	300	2400
FPV3225 E220 K	22	15.6	30	± 10%	47	1.5	300	2150
FPV3225 E240 K	24	17	33	± 10%	50	1.5	300	1980
FPV3225 E260 K	26	18.4	36	± 10%	54	1.5	280	1800
FPV3225 E300 K	30	21.2	42	± 10%	65	1.5	280	1860
FPV3225 E330 K	33	23.3	45	± 10%	70	1.5	280	1600
FPV3225 E380 K	38	27	51	± 10%	77	1.5	280	1300
FPV3225 E420 K	42	30	56	± 10%	90	1.5	280	1000
FPV3225 E480 K	48	34	62	± 10%	100	1.5	280	510
FPV3225 E560 K	56	40	72	± 10%	110	1.5	250	450
FPV3225 E600 K	60	45	76	± 10%	120	1.5	250	420
FPV3225 E680 K	68	48	86	± 10%	135	1.5	250	360

4532(1812) TYPE

4532 PART Number	Working voltage		Varistor voltage @1mA DC		Maximum Clamping Voltage8/20 μs 1A	Energy Absorb 10/1000 μs	Peak Current 8/20 μs	Typical Capacitance @1MHz
	DC	AC						
	Volts	Volts	V _B	V _B	Volts	Joules	Volts	pF
FPV453215E180 K	18	12.7	25	± 10%	38	2.5	500	4500
FPV453215E220 K	22	15.6	30	± 10%	47	2.5	500	4000
FPV453215E240 K	24	17	33	± 10%	50	2.5	500	3500
FPV453215E260 K	26	18.4	36	± 10%	54	2.5	500	3000
FPV453215E300 K	30	21.2	42	± 10%	65	2.5	500	2500
FPV453215E330 K	33	23.3	45	± 10%	70	2.5	500	2200
FPV453215E380 K	38	27	51	± 10%	77	2.5	500	2000
FPV453215E420 K	42	30	56	± 10%	90	2.5	500	1800
FPV453215E480 K	48	34	62	± 10%	100	2.5	500	1500
FPV453215E560 K	56	40	72	± 10%	110	2.5	500	1000
FPV453215E600 K	60	45	76	± 10%	120	2.5	500	750
FPV453215E680 K	68	48	86	± 10%	135	2.5	500	500

8063(3225) TYPE

8063 PART Number	Working voltage		Varistor voltage @1mA DC		Maximum Clamping Voltage8/20 μs 1A	Energy Absorb 10/1000 μs	Peak Current 8/20 μs	Typical Capacitance @1MHz
	DC	AC						
	Volts	Volts	V _B	V _B	Volts	Joules	Volts	pF
FPV8063E14 K	14	11	18	± 10%	36@1A	0.3	100	1750
FPV8063E18 K	18	14	22	± 10%	43@1A	0.4	100	1450
FPV8063E22 K	22	17	27	± 10%	53@1A	0.5	100	1200
FPV8063E26 K	26	20	33	± 10%	65@1A	0.6	100	980
FPV8063E31 K	31	25	39	± 10%	77@1A	0.7	100	850
FPV8063E38 K	38	30	47	± 10%	93@1A	0.9	100	720
FPV8063E45 K	45	35	56	± 10%	110@1A	1.1	100	620
FPV8063E56 K	56	40	68	± 10%	135@1A	1.3	100	520
FPV8063E65 K	65	50	82	± 10%	135@5A	1.8	400	300
FPV8063E85 K	85	60	100	± 10%	165@5A	2.2	400	250
FPV8063E100 K	100	75	120	± 10%	200@5A	2.5	400	210
FPV8063E125 K	125	95	150	± 10%	250@5A	3.4	400	135
FPV8063E150 K	150	115	180	± 10%	300@5A	3.6	400	110

8063 PART Number	Working voltage		Varistor voltage @1mA DC		Maximum Clamping Voltage 8/20 μ s 1A	Energy Absorb 10/1000 μ s	Peak Current 8/20 μ s	Typical Capacitance @1MHz
	DC	AC	V_B	V_B				
	Volts	Volts			Volts	Joules	Volts	pF
FPV8063E170 K	170	130	205	$\pm 10\%$	340@5A	4.2	400	100
FPV8063E180 K	180	140	220	$\pm 10\%$	360@5A	4.5	400	95
FPV8063E200 K	200	150	240	$\pm 10\%$	395@5A	4.9	400	90
FPV8063E225 K	225	175	270	$\pm 10\%$	455@5A	5.6	400	75
FPV8063E300 K	300	230	360	$\pm 10\%$	595@5A	7.2	400	60
FPV8063E320 K	320	250	390	$\pm 10\%$	650@5A	8.2	400	55
FPV8063E350 K	350	275	430	$\pm 10\%$	710@5A	8.6	400	50
FPV8063E385 K	385	300	470	$\pm 10\%$	775@5A	9.6	400	45

1080(4032) TYPE

1080 PART Number	Working voltage		Varistor voltage @1mA DC		Maximum Clamping Voltage 8/20 μ s 1A	Energy Absorb 10/1000 μ s	Peak Current 8/20 μ s	Typical Capacitance @1MHz
	DC	AC	V_B	V_B				
	Volts	Volts			Volts	Joules	Volts	pF
FPV1080E14 K	14	11	18	$\pm 10\%$	36@2.5	0.8	250	2750
FPV1080E18 K	18	14	22	$\pm 10\%$	43@2.5	0.9	250	2300
FPV1080E22 K	22	17	27	$\pm 10\%$	53@2.5	1.1	250	1900
FPV1080E26 K	26	20	33	$\pm 10\%$	65@2.5	1.3	250	1600
FPV1080E31 K	31	25	39	$\pm 10\%$	77@2.5	1.6	250	1400
FPV1080E38 K	38	30	47	$\pm 10\%$	93@2.5	2.0	250	1200
FPV1080E45 K	45	35	56	$\pm 10\%$	110@2.5	2.5	250	1050
FPV1080E56 K	56	40	68	$\pm 10\%$	135@2.5	3.0	250	900
FPV1080E65 K	65	50	82	$\pm 10\%$	135@10A	4.2	1200	530
FPV1080E85 K	85	60	100	$\pm 10\%$	165@10A	4.8	1200	480
FPV1080E100 K	100	75	120	$\pm 10\%$	200@10A	5.9	1200	430
FPV1080E125 K	125	95	150	$\pm 10\%$	250@10A	7.6	1200	260
FPV1080E150 K	150	115	180	$\pm 10\%$	300@10A	8.4	1200	220
FPV1080E170 K	170	130	205	$\pm 10\%$	340@10A	9.5	1200	200
FPV1080E180 K	180	140	220	$\pm 10\%$	360@10A	10.0	1200	180
FPV1080E200 K	200	150	240	$\pm 10\%$	395@10A	11.0	1200	170
FPV1080E225 K	225	175	270	$\pm 10\%$	455@10A	13.0	1200	150
FPV1080E300 K	300	230	360	$\pm 10\%$	595@10A	17.0	1200	115
FPV1080E320 K	320	250	390	$\pm 10\%$	650@10A	19.0	1200	105
FPV1080E350 K	350	275	430	$\pm 10\%$	710@10A	21.0	1200	95
FPV1080E385 K	385	300	470	$\pm 10\%$	775@10A	23.0	1200	90
FPV1080E615 K	615	460	750	$\pm 10\%$	1240@10A	36.0	1200	55

Remark: The working DC voltage of 8063 and 1080 part number are identified as: 18-----18V 225-----225V

Multilayer Chip Varistor High Speed Series

The Multilayer High-Speed Series is a very low capacitance extension to the FPV family of Transient Voltage Suppressor available in 1005,1608 and 2012 surface mount chip.

The High Speed series provides protection from ESD and EFT in high speed data-line and other high frequency applications.

- Data, Diagnostic I/O Ports
- Universal Serial Bus (USB)
- Video & Audio Ports
- Portable/Hand-Held Products
- Mobile Communications/Cellular Phones
- Computer/DSP Products
- Industrial Instruments Including Medical

1005(0402) TYPE

1005 PART Number	Working voltage		Varistor voltage @1mA DC		Maximum Clamping Voltage8/20 μs 1A	Energy Absorb 10/1000 μs	Peak Current 8/20 μs	Typical Capacitance @1MHz
	DC	AC						
	Volts	Volts	V _B	V _B	Volts	Joules	Volts	pF
FPV100505S3R3 M	3.3	2.5	5	± 20%	10	0.05	20	70
FPV100505S5R6 M	5.6	4	8	± 20%	15.5	0.05	20	45
FPV100505S8R0 M	8	5.7	12	± 20%	20	0.05	20	30
FPV100505S9R0 L	9	6.4	13	± 15%	20	0.05	20	26
FPV100505S110 L	11	7.8	16	± 15%	25	0.05	20	24
FPV100505S120 L	12	8.5	18	± 15%	25	0.05	20	20
FPV100505S140 L	14	10	20	± 15%	30	0.05	20	18
FPV100505S160 K	16	11.3	22	± 10%	35	0.05	20	15
FPV100505S180 K	18	12.7	25	± 10%	40	0.05	20	15

1608(0603) TYPE

1608 PART Number	Working voltage		Varistor voltage @1mA DC		Maximum Clamping Voltage8/20 μs 1A	Energy Absorb 10/1000 μs	Peak Current 8/20 μs	Typical Capacitance @1MHz
	DC	AC						
	Volts	Volts	V _B	V _B	Volts	Joules	Volts	pF
FPV2012 S3R3 M	3.3	2.5	5	± 20%	10	0.05	20	220
FPV2012 S5R6 M	5.6	4	8	± 20%	15.5	0.05	20	140
FPV2012 S8R0 M	8	5.7	12	± 20%	20	0.05	20	100
FPV2012 S9R0 L	9	6.4	13	± 15%	20	0.05	20	90
FPV2012 S110 L	11	7.8	16	± 15%	25	0.05	20	70
FPV2012 S120 L	12	8.5	18	± 15%	25	0.05	20	60
FPV2012 S140 L	14	10	20	± 15%	30	0.05	20	55
FPV2012 S160 K	16	11.3	22	± 10%	35	0.05	20	50
FPV2012 S180 K	18	12.7	25	± 10%	40	0.05	20	45
FPV2012 S220 K	22	15.6	30	± 10%	50	0.05	20	40
FPV2012 S240 K	24	17	33	± 10%	54	0.05	20	35
FPV2012 S260 K	26	18.4	36	± 10%	58	0.05	20	30
FPV2012 S300 K	30	21.2	42	± 10%	65	0.05	20	25

2012(0805) TYPE

2012 PART Number	Working voltage		Varistor voltage @1mA DC		Maximum Clamping Voltage8/20 μs 1A	Energy Absorb 10/1000 μs	Peak Current 8/20 μs	Typical Capacitance @1MHz
	DC	AC						
	Volts	Volts	V _B	V _B	Volts	Joules	Volts	pF
FPV2012 S3R3 M	3.3	2.5	5	± 20%	10	0.05	20	220
FPV2012 S5R6 M	5.6	4	8	± 20%	15.5	0.05	20	140
FPV2012 S8R0 M	8	5.7	12	± 20%	20	0.05	20	100
FPV2012 S9R0 L	9	6.4	13	± 15%	20	0.05	20	90
FPV2012 S110 L	11	7.8	16	± 15%	25	0.05	20	70
FPV2012 S120 L	12	8.5	18	± 15%	25	0.05	20	60
FPV2012 S140 L	14	10	20	± 15%	30	0.05	20	55
FPV2012 S160 K	16	11.3	22	± 10%	35	0.05	20	50
FPV2012 S180 K	18	12.7	25	± 10%	40	0.05	20	45
FPV2012 S220 K	22	15.6	30	± 10%	50	0.05	20	40
FPV2012 S240 K	24	17	33	± 10%	54	0.05	20	35
FPV2012 S260 K	26	18.4	36	± 10%	58	0.05	20	30
FPV2012 S300 K	30	21.2	42	± 10%	65	0.05	20	25





Multilayer Chip Varistor Array Electrical Characteristics Per Element

- Reduced component placement costs.
- Downsize PCB.
- Use in multiple lines for transient voltage suppression.


PART Number	Working voltage		Varistor voltage @ 1mA DC		Maximum Clamping Voltage 8/20 μ s 1A	Energy Absorb 10/1000 μ s	Peak Current 8/20 μ s	Typical Capacitance @ 1MHz
	DC	AC						
	Volts	Volts	V_B	V_B	Volts	Joules	Volts	pF
CVA2010-2G5R6 M	5.6	4	8	$\pm 20\%$	15.5	0.1	30	825
CVA2010-2G9R0 L	9	6.4	12	$\pm 15\%$	20	0.1	30	550
CVA2010-2G140 L	14	10	18	$\pm 15\%$	30	0.1	30	425
CVA2010-2G180 L	18	12.7	24	$\pm 15\%$	40	0.1	30	225
CVA2010-2S180 L	18	12.7	N/A		40	0.05	20	<75
CVA3216-4G5R6 M	5.6	4	8	$\pm 20\%$	15.5	0.1	30	825
CVA3216-4G9R0 L	9	6.4	12	$\pm 15\%$	20	0.1	30	550
CVA3216-4G140 L	14	10	18	$\pm 15\%$	30	0.1	30	425
CVA3216-4G180 L	18	12.7	24	$\pm 15\%$	40	0.1	30	225
CVA3216-4S180 L	18	12.7	N/A		40	0.05	20	<75

Characteristics



一、I-V curves

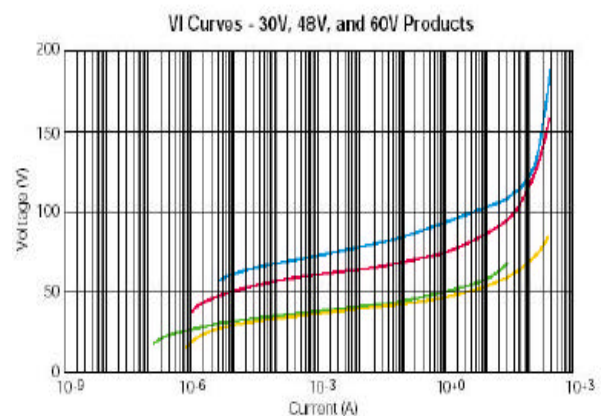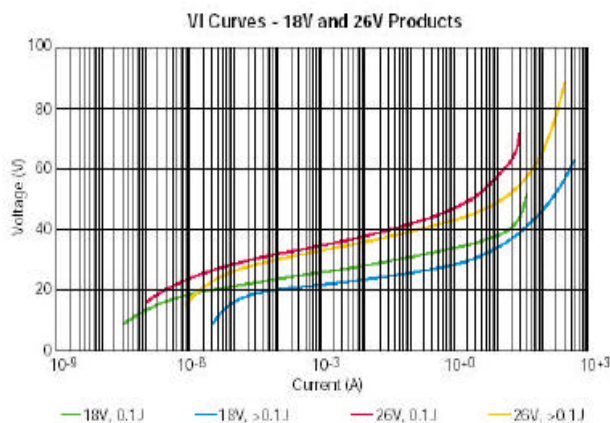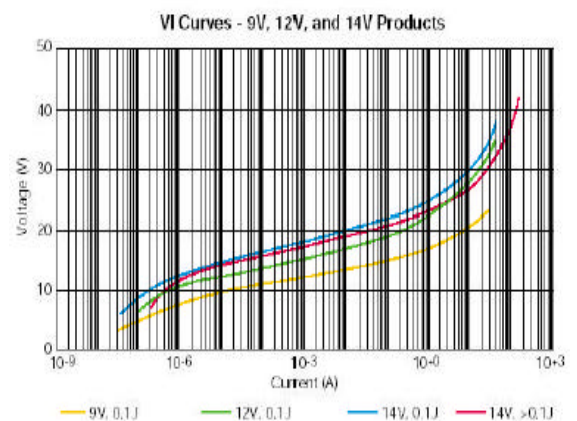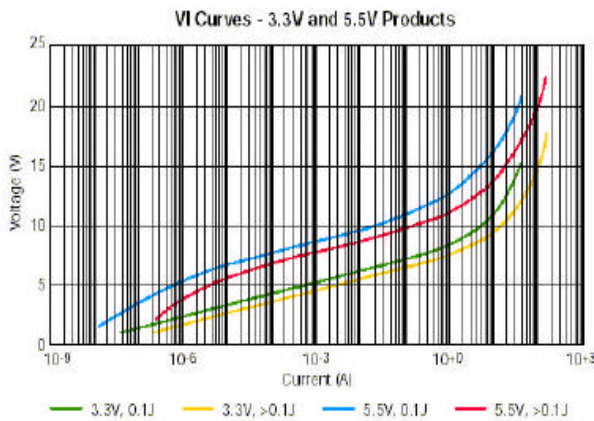

二、 V_B Vs. Temperature

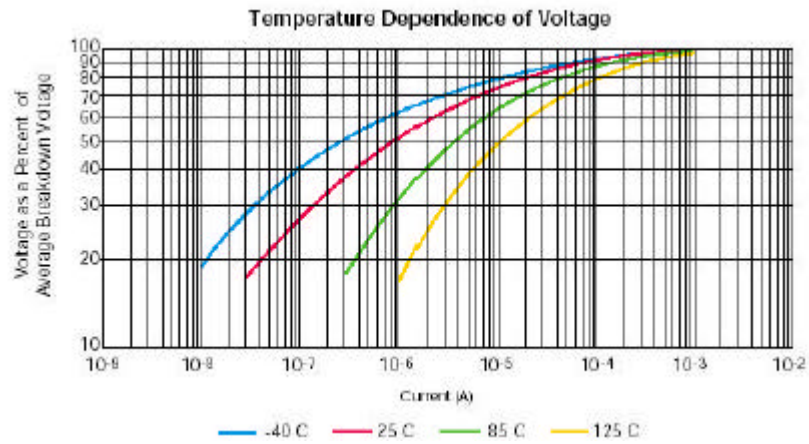


三、Energy and Capacitance Vs. Temperature

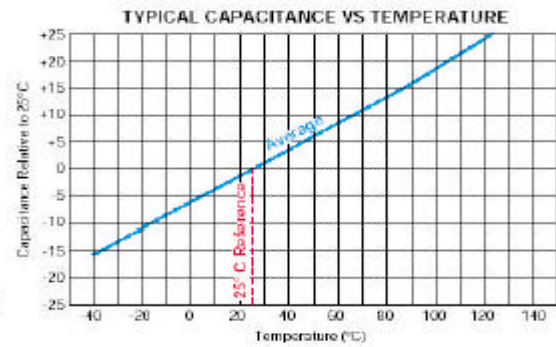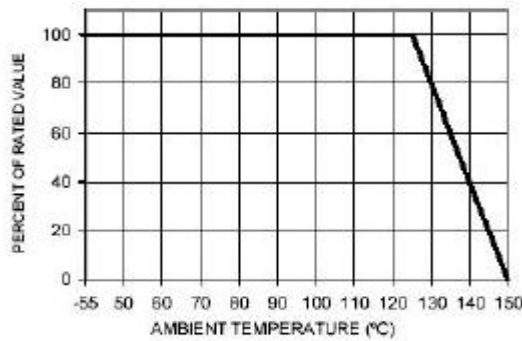


四、Reliability Test Data


Heat resistance (High-Temperature load)

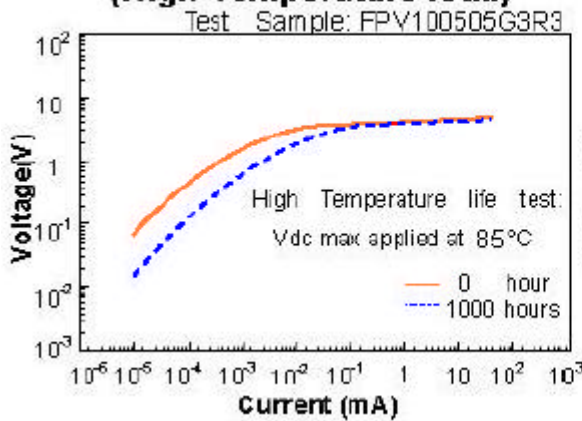


Low Temperature Resistance

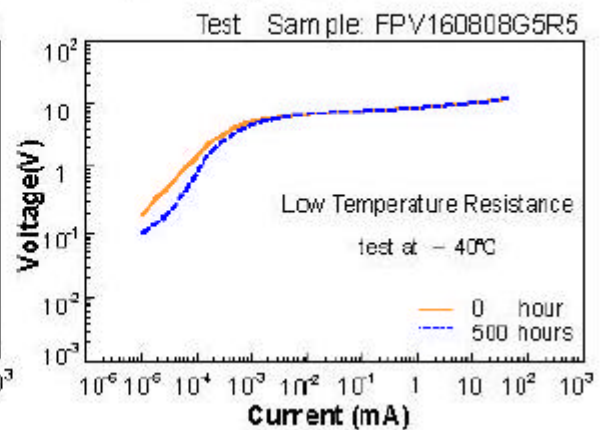



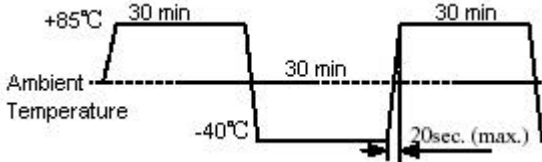
Thermal Shock (Temperature cycle)

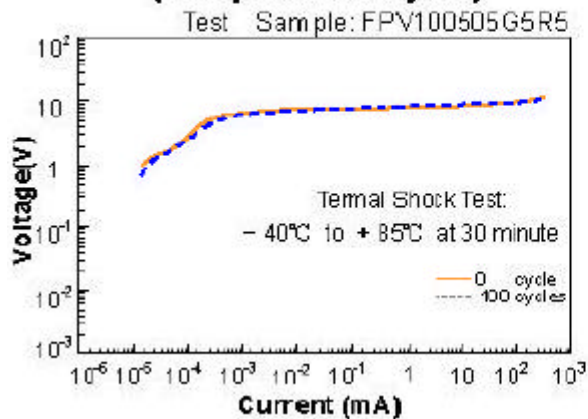

Resistance to Solder Heat

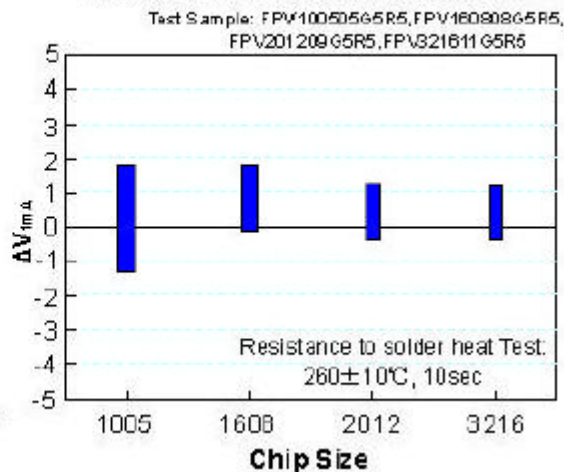

Reliability And Test Conditions

Type	Item	Specified value				Test methods	
		1005	1608	2012	3216		
1	Operating temperature range	-55 to +125				-	
2	Storage temperature range	-55 to +125				-	
3	Solderability	At least 90% of terminal electrode is covered by new solder				Solder temperature: 230 ± 10 Duration: 3 ± 1S Preheating temperature: 100 to 150 Preheating time: 60S Flux: immersion into methanol solution with colophony for 3 to 5 sec.	
4	Resistance to soldering	No damage such as cracks should be caused in chip element. At least 75% of terminal electrode is covered by new solder Varistor voltage change within ± 10%				Solder temperature: 260 ± 5 Duration: 10 ± 0.5S Preheating temperature: 100 to 150 Preheating time: 60S Flux: immersion into methanol solution with colophony for 3 to 5 sec.	
5	Terminal Strength	The terminal electrode shall not be broken off nor the chip element.				 <p>W (Kgf) min</p>	
		W	0.4	0.5	0.6		1
6	Flextrue strength	No mechanical damage.				 <p>(a, b, c: mm)</p>	
		A	0.45	1.0	1.0		1.3
		B	0.5	0.8	1.0		1.5
		C	0.5	1.3	1.3		3.0
		D	0.8	1.0	1.2		2.0
7	Drop	1、 No mechanical damage. 2、 Varistor voltage change within ± 5%				Dropped 10 times on a concrete floor from a height of 1m.	
8	Thermal shock	1、 No mechanical damage. 2、 Varistor voltage change within ± 5%				Temperature: -40 for 30 ± 3min +85 for 30 ± 3min Transforming interval :max 20 sec Number of cycles: 32 	
9	Loading at low temperature	1、 No mechanical damage. 2、 Varistor voltage change within ± 5%.				Temperature: -40 ± 2 Duration: 500 hrs	
10	Loading at high temperature	1、 No mechanical damage. 2、 Varistor voltage change within ± 5%.				Temperature: 85 ± 2 Duration: 1000 ± 12hrs Applied voltage: Working voltage	
11	Loading under Damp Heat	1、 No mechanical damage. 2、 Varistor voltage change within ± 5%.				Temperature: 55 ± 2 Duration: 500 ± 12hrs Humidity: 90 to 95%RH Applied voltage: Working voltage	

Type	Item	Specified value				Test methods	
		1005	1608	2012	3216		
12	Humidity resistance	1、 No mechanical damage. 2、 Varistor voltage change within $\pm 5\%$.				Temperature: 55 ± 2 Duration: 500 ± 12 hrs Humidity: 90 to 95%RH	
13	Vibration	1、 No mechanical damage. 2、 Varistor voltage change within $\pm 5\%$.				Amplitude: 1.5mm Directions: 2hrs each in X Y Z direction Frequency range: 10 to 55 to 10Hz (min)	
14	Resistance to pressure of substrate	The body shall not be damaged by forces applied on the right.					
		d	1.3	1.3	1.3		2.0
		w	1.0	2.0	3.0		4.0
15	Solvent resistance	1、 No mechanical damage. 2、 Varistor voltage change within $\pm 5\%$.				Solvent : Trichoroethane Washer : ultrasonic washer Wash time : 3min	


Note: When there are questions concerning, measurement shall be made after 24 ± 2 hrs of recovery under the standard condition.

Packaging

STANDAE QUANTITY


TYPE	100505	160808	201209	321611	322513	451616	453215
Quantity(PCS)	10000	4000	4000	3000	3000	5000	3000

TAPING DRAWINGS

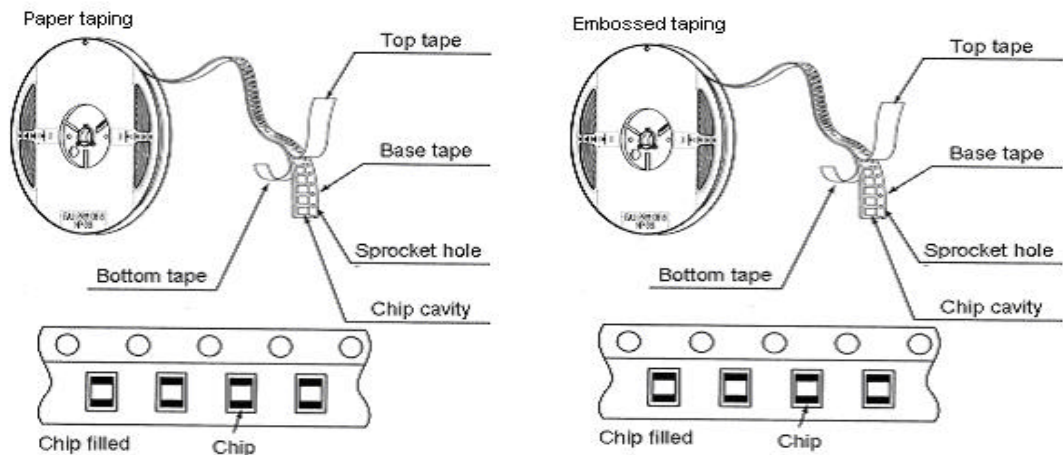


TAPING DIMENSIONS (UNIT: mm)

Paper tape

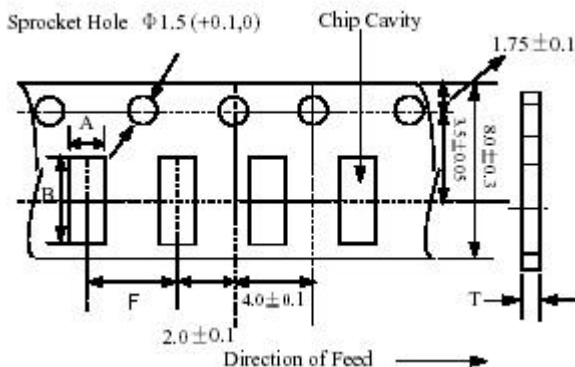

Part NO.	A	B	F	T
100505	0.65 ± 0.1	1.15 ± 0.1	2.0 ± 0.05	0.8max
160808	1.0 ± 0.2	1.8 ± 0.2	4.0 ± 0.2	1.1max
201209	1.5 ± 0.2	2.3 ± 0.2	4.0 ± 0.2	1.1max


Embossed tape

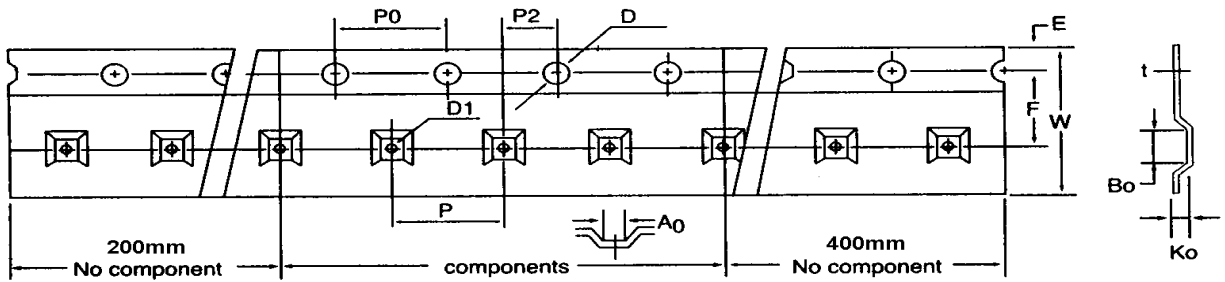


	4532	4516	3225	3216	2012
W	12.0+/-0.2	12.0+/-0.2	8.1+/-0.2	8.1+/-0.2	8.1+/-0.2
P	8.0+/-0.10	4.0+/-0.10	4.0+/-0.10	4.0+/-0.10	4.0+/-0.10
E	1.75+/-0.10	1.75+/-0.10	1.75+/-0.10	1.75+/-0.10	1.75+/-0.10
F	5.50+/-0.10	5.50+/-0.10	3.50+/-0.10	3.50+/-0.10	3.50+/-0.10
D	1.55+/-0.05	1.55+/-0.05	1.55+/-0.05	1.55+/-0.05	1.55+/-0.05
D1	1.50 ^{+0.25} ₋₀	1.50 ^{+0.25} ₋₀	1.50 ^{+0.25} ₋₀	1.50 ^{+0.25} ₋₀	1.50 ^{+0.25} ₋₀
P ₀	4.0+/-0.10	4.0+/-0.10	4.0+/-0.10	4.0+/-0.10	4.0+/-0.10
P ₀ 10	40.0+/-0.20	40.0+/-0.20	40.0+/-0.20	40.0+/-0.20	40.0+/-0.20
P ₂	2.0+/-0.05	2.0+/-0.05	2.0+/-0.05	2.0+/-0.05	2.0+/-0.05
A ₀	3.66+/-0.10	1.93+/-0.10	2.80+/-0.10	1.90+/-0.10	1.52+/-0.10
B ₀	4.95+/-0.10	4.95+/-0.10	3.50+/-0.10	3.51+/-0.10	2.41+/-0.10
t	0.23+/-0.10	0.23+/-0.10	0.23+/-0.10	0.23+/-0.10	0.23+/-0.10

REEL DIMENSIONS (UNIT : mm)

	A	B	C	N	G
CF-8	178 ± 2.0	22.0 ± 2.0	12.5 ± 1.5	67 ± 2.0	8
CF-12	330 ± 2.0	22.0 ± 2.0	12.5 ± 1.5	110 ± 2.0	12

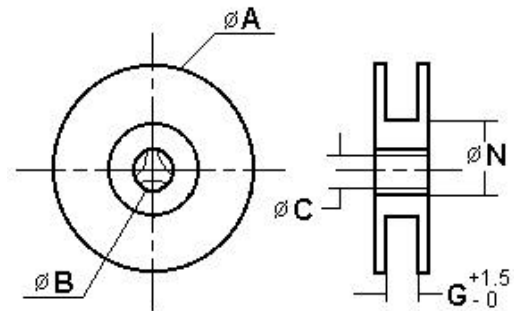

LEADER AND BLANK PORTION

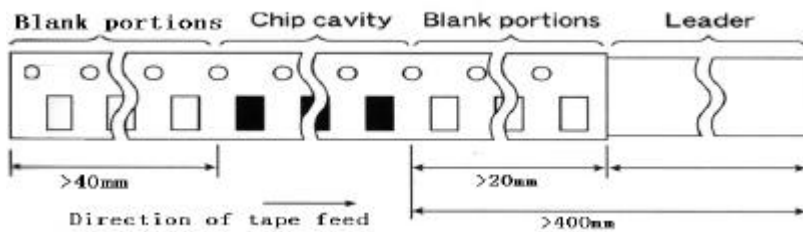

PEELING OFF FORCE : 0.05 to 0.7N in the direction show below.