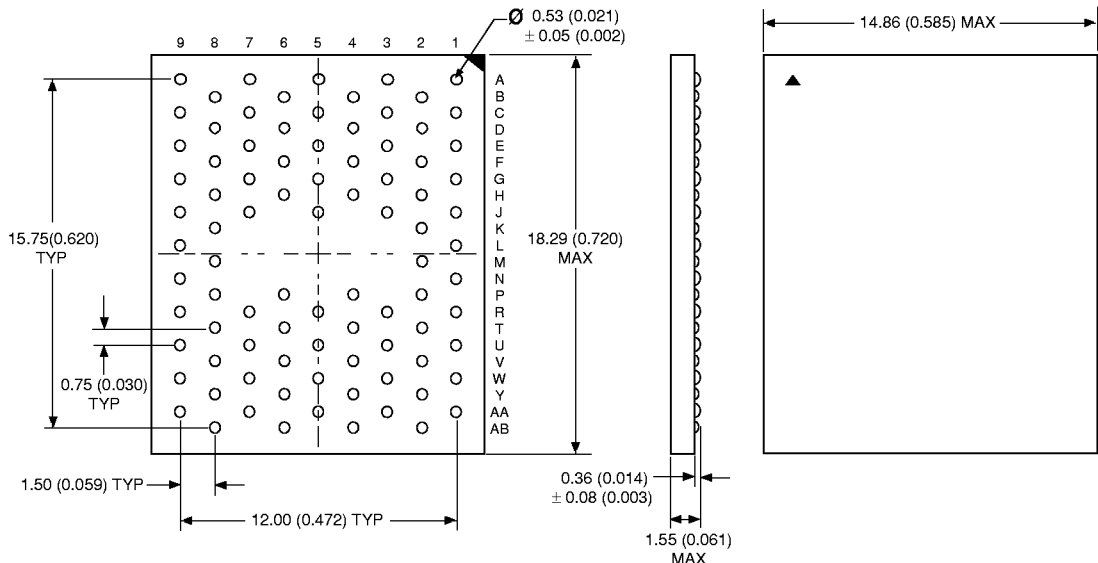


8Mx16 Dynamic RAM MODULE (3.3V Supply) *ADVANCED****FEATURES**

- Fast Access Time (trac) = 50, 60ns
- Power Supply: 3.3V $\pm$ 0.3V
- Packaging:
 - 89 pin Plastic Ball Grid Array (PBGA)
- Commercial Temperature Range
- Fast Page Mode (FPM) or Extended Data Out (EDO) Page Mode Operation

- 4K or 8K Refresh Cycles
- LVTTTL Compatible Inputs and Outputs
- $\overline{\text{CAS}}$ Before $\overline{\text{RAS}}$ Refresh
- $\overline{\text{RAS}}$ Only and Hidden Refresh Capability

* This data sheet describes a product that may or may not be under development, and is subject to change or cancellation without notice.

PACKAGE DIMENSION: 89 PIN PBGA

ALL LINEAR DIMENSIONS ARE MILLIMETERS AND PARENTHETICALLY IN INCHES

ORDERING INFORMATION

