

Complementary MOSFET

ELM34606AA-N

■ General Description

ELM34606AA-N uses advanced trench technology to provide excellent $R_{ds(on)}$ and low gate charge.

■ Features

- | | |
|--|---|
| N-channel | P-channel |
| • $V_{ds}=30V$ | $V_{ds}=-30V$ |
| • $I_d=4A$ | $I_d=-5A$ |
| • $R_{ds(on)} < 60m\Omega (V_{gs}=10V)$ | $R_{ds(on)} < 45m\Omega (V_{gs}=-10V)$ |
| • $R_{ds(on)} < 95m\Omega (V_{gs}=4.5V)$ | $R_{ds(on)} < 80m\Omega (V_{gs}=-4.5V)$ |

■ Maximum Absolute Ratings


Parameter	Symbol	N-ch (Max.)	P-ch (Max.)	Unit	Note
Drain-source voltage	V_{ds}	30	-30	V	
Gate-source voltage	V_{gs}	± 20	± 20	V	
Continuous drain current	I_d	$T_a=25^\circ C$	4	-5	A
		$T_a=70^\circ C$	3	-4	
Pulsed drain current	I_{dm}	12	-20	A	3
Power dissipation	P_d	$T_a=25^\circ C$	2.0	2.0	W
		$T_a=70^\circ C$	1.3	1.3	
Junction and storage temperature range	T_j, T_{stg}	-55 to 150	-55 to 150	$^\circ C$	

■ Thermal Characteristics

Parameter	Symbol	Device	Typ.	Max.	Unit	Note
Maximum junction-to-ambient	$R_{\theta ja}$	N-ch		62.5	$^\circ C/W$	
Maximum junction-to-ambient	$R_{\theta ja}$	P-ch		62.5	$^\circ C/W$	


■ Pin configuration

SOP-8(TOP VIEW)

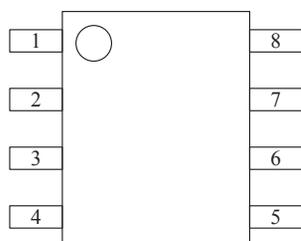

Pin No.	Pin name
1	SOURCE1
2	GATE1
3	SOURCE2
4	GATE2
5	DRAIN2
6	DRAIN2
7	DRAIN1
8	DRAIN1

■ Circuit

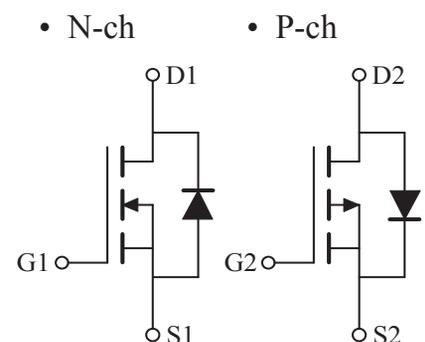

Complementary MOSFET

ELM34606AA-N

■Electrical Characteristics (N-ch)

Ta=25°C

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Note
STATIC PARAMETERS							
Drain-source breakdown voltage	BVdss	Id=250μA, Vgs=0V	30			V	
Zero gate voltage drain current	Idss	Vds=24V, Vgs=0V			1	μA	
		Vds=20V, Vgs=0V, Tj=55°C			10		
Gate-body leakage current	Igss	Vds=0V, Vgs=±20V			±100	nA	
Gate threshold voltage	Vgs(th)	Vds=Vgs, Id=250μA	1.0	1.5	2.5	V	
On state drain current	Id(on)	Vgs=10V, Vds=5V	12			A	1
Static drain-source on-resistance	Rds(on)	Vgs=10V, Id=4A		48	60	mΩ	1
		Vgs=4.5V, Id=3A		72	95		
Forward transconductance	Gfs	Vds=5V, Id=3A		19		S	1
Diode forward voltage	Vsd	If=1A, Vgs=0V			1	V	1
Max.body-diode continuous current	Is				1.2	A	
Pulsed current	Ism				2.6	A	3
DYNAMIC PARAMETERS							
Input capacitance	Ciss	Vgs=0V, Vds=10V, f=1MHz		790		pF	
Output capacitance	Coss			175		pF	
Reverse transfer capacitance	Crss			65		pF	
SWITCHING PARAMETERS							
Total gate charge	Qg	Vgs=10V, Vds=15V, Id=3A		5.0		nC	2
Gate-source charge	Qgs			0.8		nC	2
Gate-drain charge	Qgd			1.0		nC	2
Turn-on delay time	td(on)	Vgs=10V, Vds=10V, Id≈1A Rgen=6Ω		7	11	ns	2
Turn-on rise time	tr			12	18	ns	2
Turn-off delay time	td(off)			12	18	ns	2
Turn-off fall time	tf			7	11	ns	2

NOTE :


1. Pulse test : Pulsed width≤300μsec and Duty cycle≤2%.
2. Independent of operating temperature.
3. Pulsed width limited by maximum junction temperature.
4. Duty cycle ≤ 1%.

Complementary MOSFET


ELM34606AA-N

■ Typical Electrical and Thermal Characteristics (N-ch)


Output Characteristics

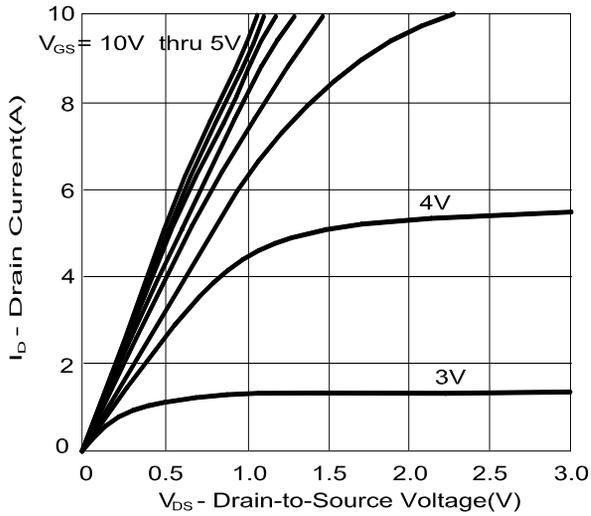


Transfer Characteristics

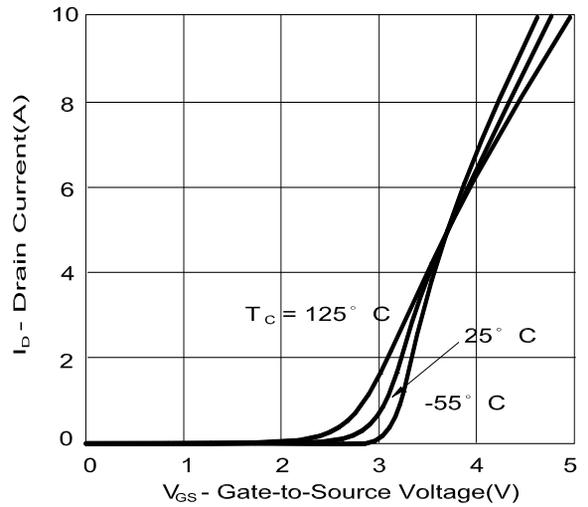


On-Resistance vs. Drain Current

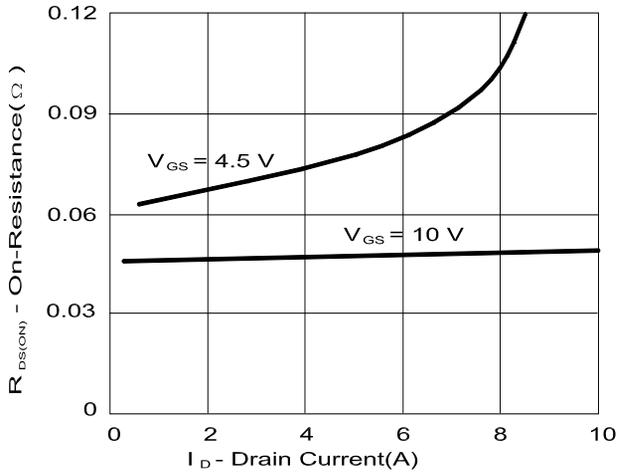


Capacitance

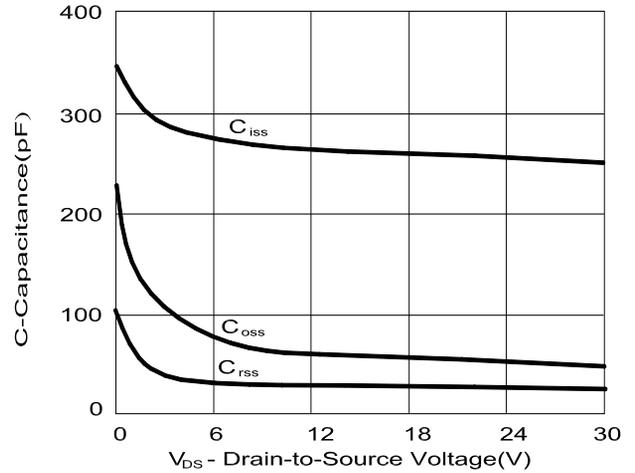

On-Resistance vs. Junction Temperature





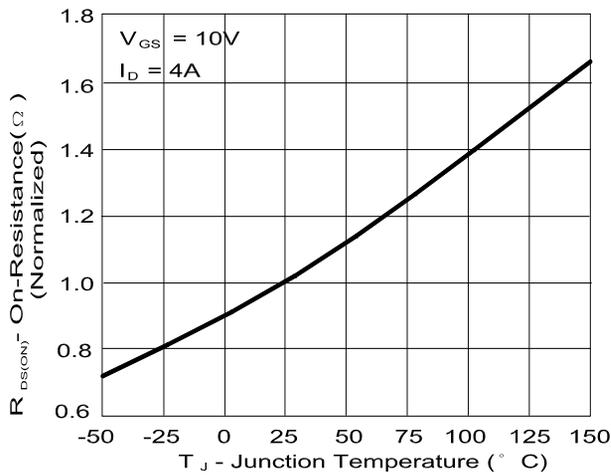


Gate Charge

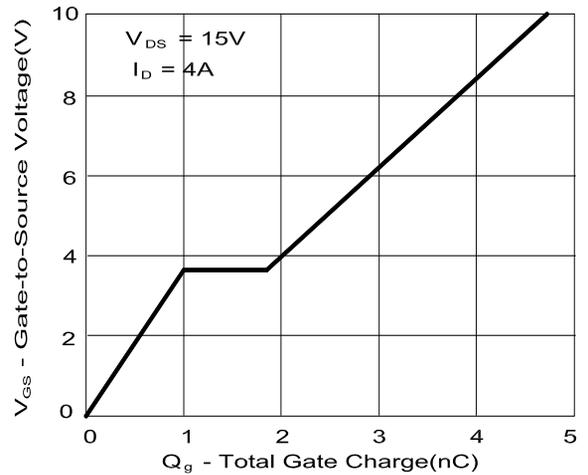

Complementary MOSFET

ELM34606AA-N

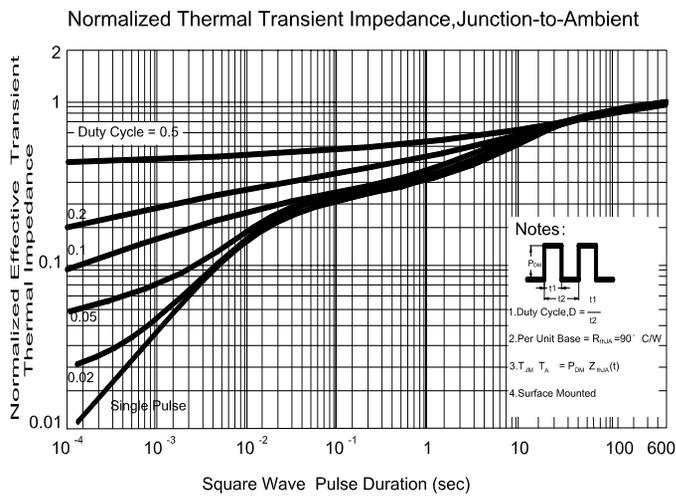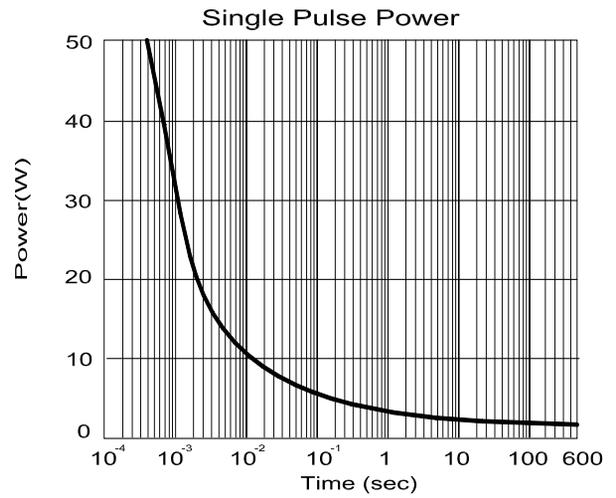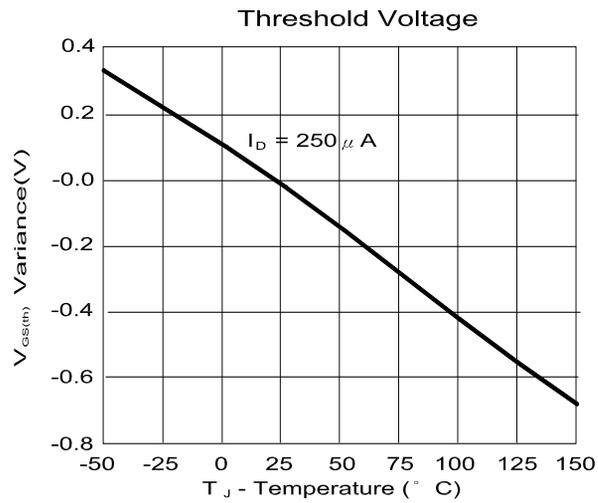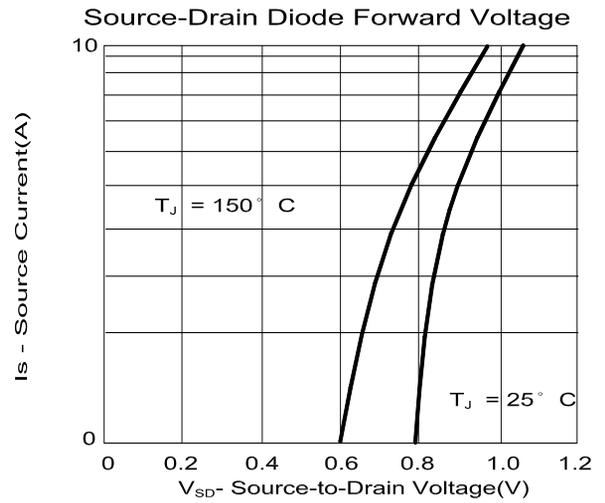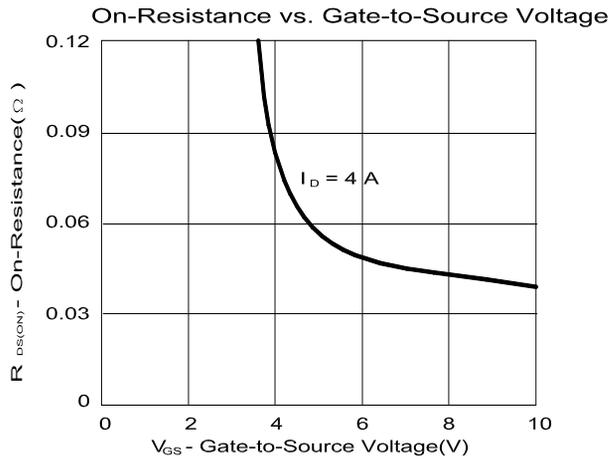

Complementary MOSFET

ELM34606AA-N

■Electrical Characteristics (P-ch)

Ta=25°C

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Note
STATIC PARAMETERS							
Drain-source breakdown voltage	BVdss	Id=-250μA, Vgs=0V	-30			V	
Zero gate voltage drain current	Idss	Vds=-24V, Vgs=0V			-1	μA	
		Vds=-20V, Vgs=0V, Tj=55°C			-10		
Gate-body leakage current	Igss	Vds=0V, Vgs=±20V			±100	nA	
Gate threshold voltage	Vgs(th)	Vds=Vgs, Id=-250μA	-1.0	-1.5	-2.5	V	
On state drain current	Id(on)	Vgs=-10V, Vds=-5V	-20			A	1
Static drain-source on-resistance	Rds(on)	Vgs=-10V, Id=-5A		34	45	mΩ	1
		Vgs=-4.5V, Id=-4A		58	80		
Forward transconductance	Gfs	Vds=-5V, Id=-5A		11		S	1
Diode forward voltage	Vsd	If=-1A, Vgs=0V			-1	V	1
Max.body-diode continuous current	Is				-1.3	A	
Pulsed current	Ism				-2.6	A	3
DYNAMIC PARAMETERS							
Input capacitance	Ciss	Vgs=0V, Vds=-10V, f=1MHz		690		pF	
Output capacitance	Coss			310		pF	
Reverse transfer capacitance	Crss			75		pF	
SWITCHING PARAMETERS							
Total gate charge	Qg	Vgs=-10V, Vds=-15V Id=-5A		14.0		nC	2
Gate-source charge	Qgs			2.2		nC	2
Gate-drain charge	Qgd			1.9		nC	2
Turn-on delay time	td(on)	Vgs=-10V, Vds=-10V Id≈-1A, Rgen=6Ω		6.7	13.4	ns	2
Turn-on rise time	tr			9.7	19.4	ns	2
Turn-off delay time	td(off)			19.8	35.6	ns	2
Turn-off fall time	tf			12.3	22.2	ns	2







NOTE :

1. Pulse test : Pulsed width≤300μsec and Duty cycle≤2%.
2. Independent of operating temperature.
3. Pulsed width limited by maximum junction temperature.

Complementary MOSFET

ELM34606AA-N

■ Typical Electrical and Thermal Characteristics (P-ch)

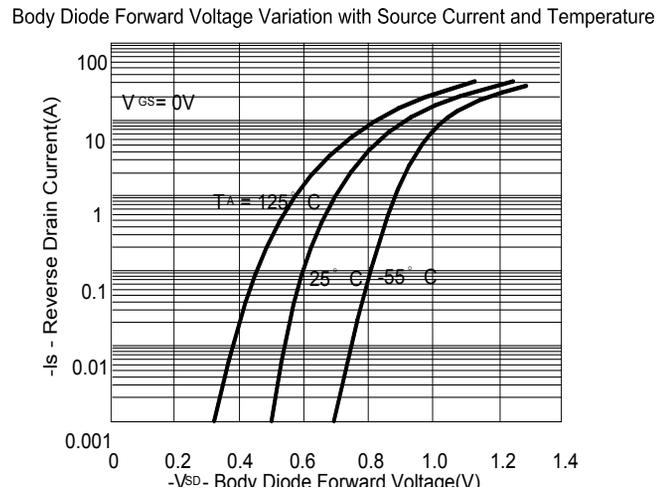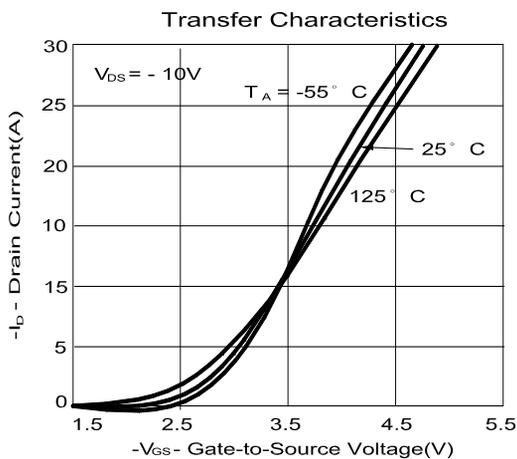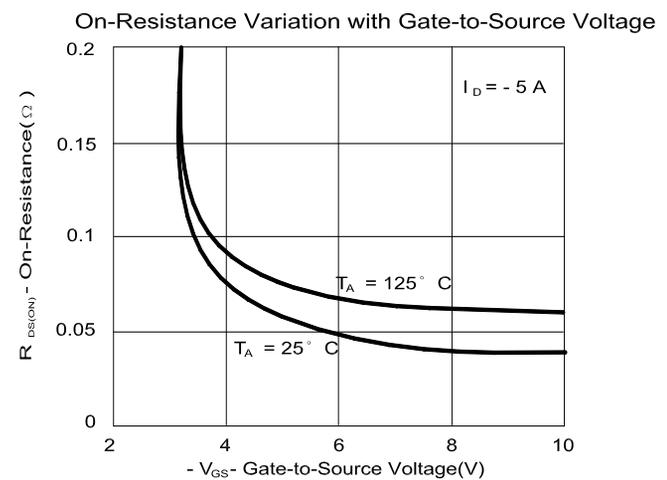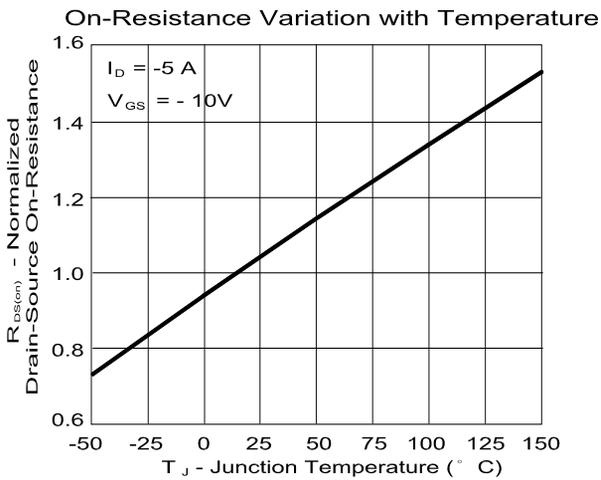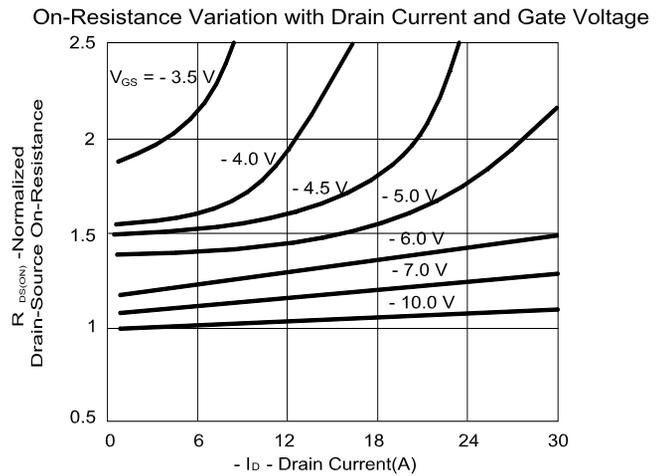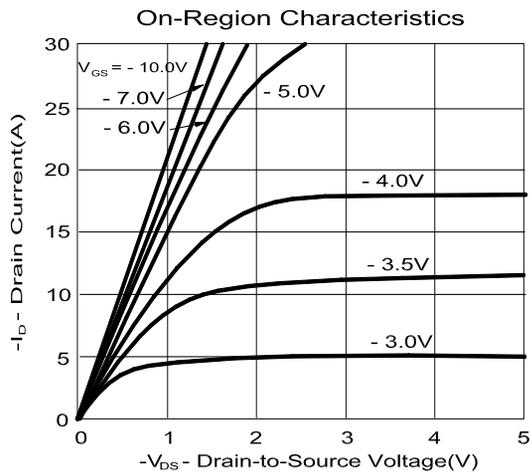

Complementary MOSFET

ELM34606AA-N

