


# EMK13H2H-41.660M



**ECLIPTEK**  
CORPORATION

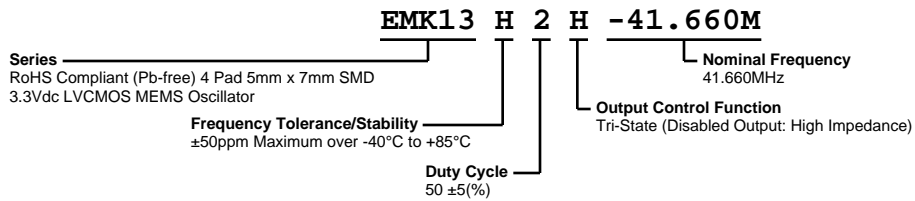

## ELECTRICAL SPECIFICATIONS

|                                 |                                                                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Nominal Frequency               | 41.660MHz                                                                                                                                                                                                                                                          |
| Frequency Tolerance/Stability   | ±50ppm Maximum over -40°C to +85°C (Inclusive of all conditions: Calibration Tolerance at 25°C, Frequency Stability over the Operating Temperature Range, Supply Voltage Change, Output Load Change, First Year Aging at 25°C, 260°C Reflow, Shock, and Vibration) |
| Aging at 25°C                   | ±1ppm Maximum First Year                                                                                                                                                                                                                                           |
| Operating Temperature Range     | -40°C to +85°C                                                                                                                                                                                                                                                     |
| Supply Voltage                  | 3.3Vdc ±10%                                                                                                                                                                                                                                                        |
| Input Current                   | 25mA Maximum                                                                                                                                                                                                                                                       |
| Output Voltage Logic High (Voh) | 90% of Vdd Minimum (IOH=-8mA)                                                                                                                                                                                                                                      |
| Output Voltage Logic Low (Vol)  | 10% of Vdd Maximum (IOL=+8mA)                                                                                                                                                                                                                                      |
| Rise/Fall Time                  | 2nSec Maximum (Measured from 20% to 80% of waveform)                                                                                                                                                                                                               |
| Duty Cycle                      | 50 ±5(%) (Measured at 50% of waveform)                                                                                                                                                                                                                             |
| Load Drive Capability           | 15pF Maximum                                                                                                                                                                                                                                                       |
| Output Logic Type               | CMOS                                                                                                                                                                                                                                                               |
| Output Control Function         | Tri-State (Disabled Output: High Impedance)                                                                                                                                                                                                                        |
| Output Control Input Voltage    | +0.7Vdd Minimum or No Connect to Enable Output, +0.3Vdd Maximum to Disable Output                                                                                                                                                                                  |
| Peak to Peak Jitter (tPK)       | 250pSec Maximum, 100pSec Typical                                                                                                                                                                                                                                   |
| Start Up Time                   | 50mSec Maximum                                                                                                                                                                                                                                                     |
| Storage Temperature Range       | -55°C to +125°C                                                                                                                                                                                                                                                    |

## ENVIRONMENTAL & MECHANICAL SPECIFICATIONS

|                              |                                                                    |
|------------------------------|--------------------------------------------------------------------|
| ESD Susceptibility           | MIL-STD-883, Method 3015, Class 2, HBM 2000V                       |
| Flammability                 | UL94-V0                                                            |
| Mechanical Shock             | MIL-STD-883, Method 2002, Condition G, 30,000G                     |
| Moisture Resistance          | MIL-STD-883, Method 1004                                           |
| Moisture Sensitivity Level   | J-STD-020, MSL 1                                                   |
| Resistance to Soldering Heat | MIL-STD-202, Method 210, Condition K                               |
| Resistance to Solvents       | MIL-STD-202, Method 215                                            |
| Solderability                | MIL-STD-883, Method 2003 (Four I/O Pads on bottom of package only) |
| Temperature Cycling          | MIL-STD-883, Method 1010, Condition B                              |
| Thermal Shock                | MIL-STD-883, Method 1011, Condition B                              |
| Vibration                    | MIL-STD-883, Method 2007, Condition A, 20G                         |

# EMK13H2H-41.660M

## MECHANICAL DIMENSIONS (all dimensions in millimeters)



| PIN | CONNECTION                 |
|-----|----------------------------|
| 1   | Tri-State (High Impedance) |
| 1   | Power Down (Logic Low)     |
| 2   | Ground                     |
| 3   | Output                     |
| 4   | Supply Voltage             |

| LINE | MARKING                                                           |
|------|-------------------------------------------------------------------|
| 1    | XXXX or XXXXX<br>XXXX or XXXXX=Ecliptek<br>Manufacturing Lot Code |

Note A: Center paddle is connected internally to oscillator ground (Pad 2).

## Suggested Solder Pad Layout

All Dimensions in Millimeters



All Tolerances are  $\pm 0.1$

# EMK13H2H-41.660M

## OUTPUT WAVEFORM & TIMING DIAGRAM



## Test Circuit for CMOS Output



Note 1: An external 0.1µF low frequency tantalum bypass capacitor in parallel with a 0.01µF high frequency ceramic bypass capacitor close to the package ground and  $V_{DD}$  pin is required.

Note 2: A low capacitance (<12pF), 10X attenuation factor, high impedance (>10Mohms), and high bandwidth (>300MHz) passive probe is recommended.

Note 3: Capacitance value  $C_L$  includes sum of all probe and fixture capacitance.

## Recommended Solder Reflow Methods



### High Temperature Infrared/Convection

**$T_s$  MAX to  $T_L$  (Ramp-up Rate)** 3°C/second Maximum

#### Preheat

- Temperature Minimum ( $T_s$  MIN) 150°C
- Temperature Typical ( $T_s$  TYP) 175°C
- Temperature Maximum ( $T_s$  MAX) 200°C
- Time ( $t_s$  MIN) 60 - 180 Seconds

**Ramp-up Rate ( $T_L$  to  $T_p$ )** 3°C/second Maximum

#### Time Maintained Above:

- Temperature ( $T_L$ ) 217°C
- Time ( $t_L$ ) 60 - 150 Seconds

**Peak Temperature ( $T_p$ )** 260°C Maximum for 10 Seconds Maximum

**Target Peak Temperature ( $T_p$  Target)** 250°C +0/-5°C

**Time within 5°C of actual peak ( $t_p$ )** 20 - 40 seconds

**Ramp-down Rate** 6°C/second Maximum

**Time 25°C to Peak Temperature (t)** 8 minutes Maximum

**Moisture Sensitivity Level** Level 1

## Recommended Solder Reflow Methods



### Low Temperature Infrared/Convection 240°C

|                                                          |                                                        |
|----------------------------------------------------------|--------------------------------------------------------|
| <b>T<sub>s</sub> MAX to T<sub>L</sub> (Ramp-up Rate)</b> | 5°C/second Maximum                                     |
| <b>Preheat</b>                                           |                                                        |
| - Temperature Minimum (T <sub>s</sub> MIN)               | N/A                                                    |
| - Temperature Typical (T <sub>s</sub> TYP)               | 150°C                                                  |
| - Temperature Maximum (T <sub>s</sub> MAX)               | N/A                                                    |
| - Time (t <sub>s</sub> MIN)                              | 60 - 120 Seconds                                       |
| <b>Ramp-up Rate (T<sub>L</sub> to T<sub>P</sub>)</b>     | 5°C/second Maximum                                     |
| <b>Time Maintained Above:</b>                            |                                                        |
| - Temperature (T <sub>L</sub> )                          | 150°C                                                  |
| - Time (t <sub>L</sub> )                                 | 200 Seconds Maximum                                    |
| <b>Peak Temperature (T<sub>P</sub>)</b>                  | 240°C Maximum                                          |
| <b>Target Peak Temperature (T<sub>P</sub> Target)</b>    | 240°C Maximum 1 Time / 230°C Maximum 2 Times           |
| <b>Time within 5°C of actual peak (t<sub>p</sub>)</b>    | 10 seconds Maximum 2 Times / 80 seconds Maximum 1 Time |
| <b>Ramp-down Rate</b>                                    | 5°C/second Maximum                                     |
| <b>Time 25°C to Peak Temperature (t)</b>                 | N/A                                                    |
| <b>Moisture Sensitivity Level</b>                        | Level 1                                                |

### Low Temperature Manual Soldering

185°C Maximum for 10 seconds Maximum, 2 times Maximum.

### High Temperature Manual Soldering

260°C Maximum for 5 seconds Maximum, 2 times Maximum.