



Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

MAX19985A

General Description

The MAX19985A high-linearity, dual-channel, downconversion mixer is designed to provide approximately 8.7dB gain, +25.5dBm of IIP3, and 9.0dB of noise figure for 700MHz to 1000MHz diversity receiver applications. With an optimized LO frequency range of 900MHz to 1300MHz, this mixer is ideal for high-side LO injection architectures in the cellular and new 700MHz bands. Low-side LO injection is supported by the MAX19985, which is pin-pin and functionally compatible with the MAX19985A.

In addition to offering excellent linearity and noise performance, the MAX19985A also yields a high level of component integration. This device includes two double-balanced passive mixer cores, two LO buffers, a dual-input LO selectable switch, and a pair of differential IF output amplifiers. On-chip baluns are also integrated to allow for single-ended RF and LO inputs.

The MAX19985A requires a nominal LO drive of 0dBm and a typical supply current of 330mA at $V_{CC} = +5.0V$ or 280mA at $V_{CC} = +3.3V$.

The MAX19985/MAX19985A are pin compatible with the MAX19995/MAX19995A series of 1700MHz to 2200MHz mixers and pin similar with the MAX19997A/MAX19999 series of 1850MHz to 3800MHz mixers, making this entire family of downconverters ideal for applications where a common PCB layout is used across multiple frequency bands.

The MAX19985A is available in a 6mm x 6mm, 36-pin thin QFN package with an exposed pad. Electrical performance is guaranteed over the extended temperature range of $T_C = -40^{\circ}C$ to $+85^{\circ}C$.

Applications

850MHz WCDMA and cdma2000[®] Base Stations
 700MHz LTE/WiMAX[™] Base Stations
 GSM850/900 2G and 2.5G EDGE Base Stations
 iDEN[®] Base Stations
 Fixed Broadband Wireless Access
 Wireless Local Loop
 Private Mobile Radios
 Military Systems

cdma2000 is a registered trademark of Telecommunications Industry Association.

WiMAX is a trademark of WiMAX Forum.

iDEN is a registered trademark of Motorola, Inc.



Features

- ◆ 700MHz to 1000MHz RF Frequency Range
- ◆ 900MHz to 1300MHz LO Frequency Range
- ◆ 50MHz to 500MHz IF Frequency Range
- ◆ 8.7dB Typical Conversion Gain
- ◆ 9.0dB Typical Noise Figure
- ◆ +25.5dBm Typical Input IP3
- ◆ +12.6dBm Typical Input 1dB Compression Point
- ◆ 76dBc Typical 2LO-2RF Spurious Rejection at PRF = -10dBm
- ◆ Dual Channels Ideal for Diversity Receiver Applications
- ◆ 48dB Typical Channel-to-Channel Isolation
- ◆ Low -3dBm to +3dBm LO Drive
- ◆ Integrated LO Buffer
- ◆ Internal RF and LO Baluns for Single-Ended Inputs
- ◆ Built-In SPDT LO Switch with 46dB LO1-to-LO2 Isolation and 50ns Switching Time
- ◆ Pin Compatible with the MAX19995/MAX19995A Series of 1700MHz to 2200MHz Mixers
- ◆ Pin Similar to the MAX19997A/MAX19999 Series of 1850MHz to 3800MHz Mixers
- ◆ Single +5.0V or +3.3V Supply
- ◆ External Current-Setting Resistors Provide Option for Operating Device in Reduced-Power/Reduced-Performance Mode

Ordering Information

| PART | TEMP RANGE | PIN-PACKAGE |
|----------------|----------------|-----------------|
| MAX19985AETX+ | -40°C to +85°C | 36 Thin QFN-EP* |
| MAX19985AETX+T | -40°C to +85°C | 36 Thin QFN-EP* |

+ Denotes a lead-free/RoHS-compliant package.

*EP = Exposed pad.

T = Tape and reel.

Typical Application Circuit and Pin Configuration appear at end of data sheet.

Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

ABSOLUTE MAXIMUM RATINGS

| | | | |
|--|-----------------------------------|---|---------------------------------|
| V _{CC} to GND | -0.3V to +5.5V | θ _{JA} (Notes 2, 3)..... | +38°C/W |
| LO1, LO2 to GND | ±0.3V | θ _{JC} (Note 3)..... | 7.4°C/W |
| Any Other Pins to GND..... | -0.3V to (V _{CC} + 0.3V) | Operating Temperature Range (Note 4)..... | T _C = -40°C to +85°C |
| RFMAIN, RFDIV, and LO_ Input Power | +15dBm | Junction Temperature | +150°C |
| RFMAIN, RFDIV Current (RF is DC shorted to GND through balun)..... | 50mA | Storage Temperature Range | -65°C to +150°C |
| Continuous Power Dissipation (Note 1) | 8.8W | Lead Temperature (soldering, 10s) | +300°C |

Note 1: Based on junction temperature $T_J = T_C + (\theta_{JC} \times V_{CC} \times I_{CC})$. This formula can be used when the temperature of the exposed pad is known while the device is soldered down to a PCB. See the *Applications Information* section for details. The junction temperature must not exceed +150°C.

Note 2: Junction temperature $T_J = T_A + (\theta_{JA} \times V_{CC} \times I_{CC})$. This formula can be used when the ambient temperature of the PCB is known. The junction temperature must not exceed +150°C.

Note 3: Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to www.maxim-ic.com/thermal-tutorial.

Note 4: T_C is the temperature on the exposed pad of the package. T_A is the ambient temperature of the device and PCB.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

+5.0V SUPPLY DC ELECTRICAL CHARACTERISTICS

(Typical Application Circuit, V_{CC} = 4.75V to 5.25V, T_C = -40°C to +85°C. Typical values are at V_{CC} = 5.0V, T_C = +25°C, all parameters are production tested, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--------------------------|-----------------------------------|------------|------|-----|------|-------|
| Supply Voltage | V _{CC} | | 4.75 | 5 | 5.25 | V |
| Supply Current | I _{CC} | | | 330 | 380 | mA |
| LOSEL Input High Voltage | V _{IH} | | 2 | | | V |
| LOSEL Input Low Voltage | V _{IL} | | | | 0.8 | V |
| LOSEL Input Current | I _{IH} , I _{IL} | | -10 | | +10 | μA |

+3.3V SUPPLY DC ELECTRICAL CHARACTERISTICS

(Typical Application Circuit, V_{CC} = 3.0V to 3.6V, T_C = -40°C to +85°C. Typical values are at V_{CC} = 3.3V, T_C = +25°C, all parameters are guaranteed by design and not production tested, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--------------------------|-----------------|--|-----|-----|-----|-------|
| Supply Voltage | V _{CC} | R2 = R5 = 600Ω | 3.0 | 3.3 | 3.6 | V |
| Supply Current | I _{CC} | Total supply current, V _{CC} = 3.3V | | 280 | | mA |
| LOSEL Input High Voltage | V _{IH} | | | 2 | | V |
| LOSEL Input Low Voltage | V _{IL} | | | 0.8 | | V |

Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

MAX19985A

RECOMMENDED AC OPERATING CONDITIONS

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|----------------|----------|--|-----|-----|------|-------|
| RF Frequency | f_{RF} | (Note 5) | 700 | | 1000 | MHz |
| LO Frequency | f_{LO} | (Note 5) | 900 | | 1300 | MHz |
| IF Frequency | f_{IF} | Using Mini-Circuits TC4-1W-17 4:1 transformer as defined in the <i>Typical Application Circuit</i> , IF matching components affect the IF frequency range (Note 5) | 100 | | 500 | MHz |
| | | Using alternative Mini-Circuits TC4-1W-7A 4:1 transformer, IF matching components affect the IF frequency range (Note 5) | 50 | | 250 | |
| LO Drive Level | P_{LO} | (Note 5) | -3 | | +3 | dBm |

+5.0V SUPPLY AC ELECTRICAL CHARACTERISTICS

(*Typical Application Circuit*, $V_{CC} = +4.75V$ to $+5.25V$, RF and LO ports are driven from 50Ω sources, $P_{LO} = -3dBm$ to $+3dBm$, $P_{RF} = -5dBm$, $f_{RF} = 700MHz$ to $1000MHz$, $f_{LO} = 900MHz$ to $1200MHz$, $f_{IF} = 200MHz$, $f_{RF} < f_{LO}$, $T_C = -40^\circ C$ to $+85^\circ C$. Typical values are at $V_{CC} = +5.0V$, $P_{RF} = -5dBm$, $P_{LO} = 0dBm$, $f_{RF} = 900MHz$, $f_{LO} = 1100MHz$, $f_{IF} = 200MHz$, $T_C = +25^\circ C$, all parameters are guaranteed by design and characterization, unless otherwise noted.) (Note 6)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|--------------|---|------|--------|------|----------------|
| Conversion Power Gain | G_C | $f_{IF} = 200MHz$, $f_{RF} = 824MHz$ to $915MHz$, $T_C = -40^\circ C$ to $+85^\circ C$ | 7.0 | 8.7 | 10.2 | dB |
| | | $f_{IF} = 200MHz$, $f_{RF} = 824MHz$ to $915MHz$, $T_C = +25^\circ C$ (Note 9) | 7.7 | 8.7 | 9.7 | |
| Conversion Power Gain Variation vs. Frequency | ΔG_C | Flatness over any one of three frequency bands: $f_{RF} = 824MHz$ to $849MHz$, $f_{RF} = 869MHz$ to $894MHz$, $f_{RF} = 880MHz$ to $915MHz$ (Note 9) | | 0.15 | 0.3 | dB |
| Gain Variation Over Temperature | TC_G | $T_C = -40^\circ C$ to $+85^\circ C$ | | -0.012 | | dB/ $^\circ C$ |
| Noise Figure | NF | $T_C = -40^\circ C$ to $+85^\circ C$ | | 9.2 | 11.5 | dB |
| | | $f_{RF} = 850MHz$, $f_{IF} = 200MHz$, $P_{LO} = 0dBm$, $T_C = +25^\circ C$, $V_{CC} = +5.0V$ | | 9.0 | 10.3 | |
| Noise Figure Temperature Coefficient | TC_{NF} | $T_C = -40^\circ C$ to $+85^\circ C$ | | 0.018 | | dB/ $^\circ C$ |
| Noise Figure Under Blocking Condition | N_{FB} | +8dBm blocker tone applied to RF port, $f_{RF} = 900MHz$, $f_{LO} = 1090MHz$, $P_{LO} = -3dBm$, $f_{BLOCKER} = 800MHz$, $V_{CC} = +5.0V$ (Note 7) | | 18.8 | 22 | dB |
| Input 1dB Compression Point | IP_{1dB} | $T_C = -40^\circ C$ to $+85^\circ C$ | 10.0 | 12.6 | | dBm |
| | | $T_C = +25^\circ C$ (Note 9) | 11.0 | 12.6 | | |
| Third-Order Input Intercept Point | IIP3 | $f_{RF} = 824MHz$ to $915MHz$, $f_{RF1} - f_{RF2} = 1MHz$, $f_{IF} = 200MHz$, $P_{RF} = -5dBm$ /tone, $T_C = -40^\circ C$ to $+85^\circ C$ | 22.5 | 25.5 | | dBm |
| | | $f_{RF} = 824MHz$ to $915MHz$, $f_{RF1} - f_{RF2} = 1MHz$, $f_{IF} = 200MHz$, $P_{RF} = -5dBm$ /tone, $T_C = +25^\circ C$ (Note 9) | 23.5 | 25.5 | | |

Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

+5.0V SUPPLY AC ELECTRICAL CHARACTERISTICS (continued)

(Typical Application Circuit, $V_{CC} = +4.75V$ to $+5.25V$, RF and LO ports are driven from 50Ω sources, $P_{LO} = -3dBm$ to $+3dBm$, $P_{RF} = -5dBm$, $f_{RF} = 700MHz$ to $1000MHz$, $f_{LO} = 900MHz$ to $1200MHz$, $f_{IF} = 200MHz$, $f_{RF} < f_{LO}$, $T_C = -40^\circ C$ to $+85^\circ C$. Typical values are at $V_{CC} = +5.0V$, $P_{RF} = -5dBm$, $P_{LO} = 0dBm$, $f_{RF} = 900MHz$, $f_{LO} = 1100MHz$, $f_{IF} = 200MHz$, $T_C = +25^\circ C$, all parameters are guaranteed by design and characterization, unless otherwise noted.) (Note 6)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|------------------------------|----------|---|------------------------------|-----|------|----------|
| 2LO-2RF Spur Rejection | 2 x 2 | $f_{RF} = 800MHz$, $f_{LO} = 1000MHz$, $f_{SPUR} = 900MHz$ | $P_{RF} = -10dBm$ | -63 | -76 | dBc |
| | | | $P_{RF} = -5dBm$ (Note 9) | -58 | -71 | |
| 3LO-3RF Spur Rejection | 3 x 3 | $f_{RF} = 800MHz$, $f_{LO} = 1000MHz$, $f_{SPUR} = 933.3MHz$ | $P_{RF} = -10dBm$ | -65 | -78 | dBc |
| | | | $P_{RF} = -5dBm$ (Note 9) | -60 | -73 | |
| LO Leakage at RF Port | | $f_{LO} = 900MHz$ to $1300MHz$, $P_{LO} = +3dBm$ (Note 10) | | -40 | -20 | dBm |
| 2LO Leakage at RF Port | | $f_{LO} = 900MHz$ to $1200MHz$, $P_{LO} = +3dBm$ (Note 10) | | -38 | -25 | dBm |
| | | $f_{LO} = 1200MHz$ to $1300MHz$, $P_{LO} = +3dBm$ (Note 10) | | -35 | -22 | |
| 3LO Leakage at RF Port | | $f_{LO} = 900MHz$ to $1300MHz$, $P_{LO} = +3dBm$ (Note 10) | | -50 | -28 | dBm |
| 4LO Leakage at RF Port | | $f_{LO} = 900MHz$ to $1300MHz$, $P_{LO} = +3dBm$ (Note 9) | | -25 | -15 | dBm |
| LO Leakage at IF Port | | $f_{LO} = 900MHz$ to $1300MHz$, $P_{LO} = +3dBm$ (Note 10) | | -35 | -23 | dBm |
| RF-to-IF Isolation | | $f_{RF} = 824MHz$ to $915MHz$ (Note 10) | 30 | 38 | | dB |
| LO-to-LO Isolation | | $P_{LO1} = +3dBm$, $P_{LO2} = +3dBm$, $f_{LO1} = 900MHz$, $f_{LO2} = 901MHz$, $P_{RF} = -5dBm$ (Notes 8, 10) | 40 | 46 | | dB |
| Channel-to-Channel Isolation | | RFMAIN (RFDIV) converted power measured at IFDIV (IFMAIN), relative to IFMAIN (IFDIV), all unused ports terminated to 50Ω (Note 9) | 40 | 48 | | dB |
| LO Switching Time | | 50% of LOSEL to IF settled within 2 degrees | | 50 | 1000 | ns |
| RF Input Impedance | Z_{RF} | | | 50 | | Ω |
| RF Input Return Loss | | LO on and IF terminated into matched impedance | | 20 | | dB |
| LO Input Impedance | Z_{LO} | | | 50 | | Ω |
| LO Input Return Loss | | RF and IF terminated into matched impedance, LO port selected | | 20 | | dB |
| | | RF and IF terminated into matched impedance, LO port unselected | | 20 | | |
| IF Terminal Output Impedance | Z_{IF} | Nominal differential impedance at the IC's IF output | | 200 | | Ω |
| IF Return Loss | | RF terminated in 50Ω ; transformed to 50Ω using external components shown in the <i>Typical Application Circuit</i> | | 18 | | dB |

Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

MAX19985A

+3.3V SUPPLY AC ELECTRICAL CHARACTERISTICS

(Typical Application Circuit, RF and LO ports are driven from 50Ω sources. Typical values are at V_{CC} = +3.3V, P_{RF} = -5dBm, P_{LO} = 0dBm, f_{RF} = 900MHz, f_{LO} = 1100MHz, f_{IF} = 200MHz, T_C = +25°C, unless otherwise noted.) (Note 6)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|-------------------|---|--------------------------|--------|-----|-------|
| Conversion Power Gain | G _C | | | 8.7 | | dB |
| Conversion Power Gain Variation vs. Frequency | ΔG _C | Flatness over any one of three frequency bands: f _{RF} = 824MHz to 849MHz, f _{RF} = 869MHz to 894MHz, f _{RF} = 880MHz to 915MHz | | 0.15 | | dB |
| Gain Variation Over Temperature | TC _G | T _C = -40°C to +85°C | | -0.012 | | dB/°C |
| Noise Figure | NF | | | 9.0 | | dB |
| Noise Figure Temperature Coefficient | TC _{NF} | T _C = -40°C to +85°C | | 0.018 | | dB/°C |
| Input 1dB Compression Point | IP _{1dB} | | | 10.6 | | dBm |
| Third-Order Input Intercept Point | IIP ₃ | f _{RF1} = 900MHz, f _{RF2} = 901MHz, f _{IF} = 200MHz, P _{RF} = -5dBm/tone | | 24.7 | | dBm |
| 2LO-2RF Spur Rejection | 2 x 2 | f _{RF} = 800MHz, f _{LO} = 1000MHz, f _{SPUR} = 900MHz | P _{RF} = -10dBm | -74.9 | | dBc |
| | | | P _{RF} = -5dBm | -69.9 | | |
| 3LO-3RF Spur Rejection | 3 x 3 | f _{RF} = 800MHz, f _{LO} = 1000MHz, f _{SPUR} = 933.333MHz | P _{RF} = -10dBm | -78 | | dBc |
| | | | P _{RF} = -5dBm | -73 | | |
| Maximum LO Leakage at RF Port | | f _{LO} = 900MHz to 1300MHz, P _{LO} = +3dBm | | -40 | | dBm |
| Maximum 2LO Leakage at RF Port | | f _{LO} = 900MHz to 1300MHz, P _{LO} = +3dBm | | -42 | | dBm |
| Maximum LO Leakage at IF Port | | f _{LO} = 900MHz to 1300MHz, P _{LO} = +3dBm | | -34 | | dBm |
| Minimum RF-to-IF Isolation | | f _{RF} = 824MHz to 915MHz | | 38 | | dB |
| LO-to-LO Isolation | | P _{LO1} = +3dBm, P _{LO2} = +3dBm, f _{LO1} = 900MHz, f _{LO2} = 901MHz (Note 8) | | 45 | | dB |
| Channel-to-Channel Isolation | | RFMAIN (RFDIV) converted power measured at IFDIV (IFMAIN), relative to IFMAIN (IFDIV), all unused ports terminated to 50Ω | | 48 | | dB |
| LO Switching Time | | 50% of LOSEL to IF settled within 2 degrees | | 50 | | ns |
| RF Input Impedance | Z _{RF} | | | 50 | | Ω |
| RF Input Return Loss | | LO on and IF terminated into matched impedance | | 21 | | dB |
| LO Input Impedance | Z _{LO} | | | 50 | | Ω |
| LO Input Return Loss | | RF and IF terminated into matched impedance, LO port selected | | 31 | | dB |
| | | RF and IF terminated into matched impedance, LO port unselected | | 24 | | |

Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

+3.3V SUPPLY AC ELECTRICAL CHARACTERISTICS (continued)

(Typical Application Circuit, RF and LO ports are driven from 50Ω sources. Typical values are at $V_{CC} = +3.3V$, $P_{RF} = -5dBm$, $P_{LO} = 0dBm$, $f_{RF} = 900MHz$, $f_{LO} = 1100MHz$, $f_{IF} = 200MHz$, $T_C = +25^{\circ}C$, unless otherwise noted.) (Note 6)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|------------------------------|----------|--|-----|-----|-----|----------|
| IF Terminal Output Impedance | Z_{IF} | Nominal differential impedance at the IC's IF output | | 200 | | Ω |
| IF Output Return Loss | | RF terminated in 50Ω; transformed to 50Ω using external components shown in the <i>Typical Application Circuit</i> | | 17 | | dB |

Note 5: Not production tested. Operation outside this range is possible, but with degraded performance of some parameters. See the *Typical Operating Characteristics*. Performance is optimized for RF frequencies of 824MHz to 915MHz.

Note 6: All limits reflect losses of external components. Output measurements taken at IF outputs of *Typical Application Circuit*.

Note 7: Measured with external LO source noise filtered so the noise floor is -174dBm/Hz. This specification reflects the effects of all SNR degradations in the mixer including the LO noise, as defined in the Application Note 2021: *Specifications and Measurement of Local Oscillator Noise in Integrated Circuit Base Station Mixers*.

Note 8: Measured at IF port at IF frequency. LOSEL may be in any logic state.

Note 9: Limited production testing.










Note 10: Guaranteed by production testing.

Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

MAX19985A

Typical Operating Characteristics










(Typical Application Circuit, $V_{CC} = +5.0V$, $P_{LO} = 0dBm$, $P_{RF} = -5dBm$, LO is high-side injected for a 200MHz IF, $T_C = +25^\circ C$, unless otherwise noted.)

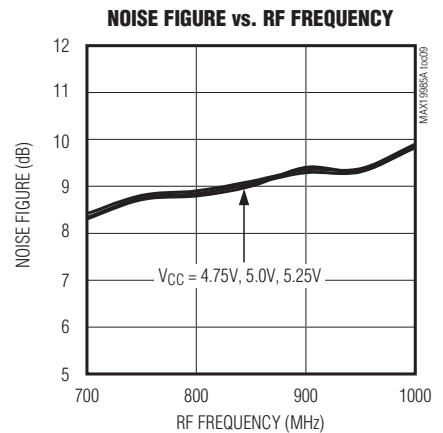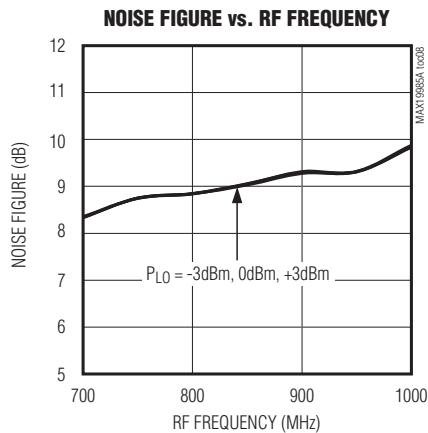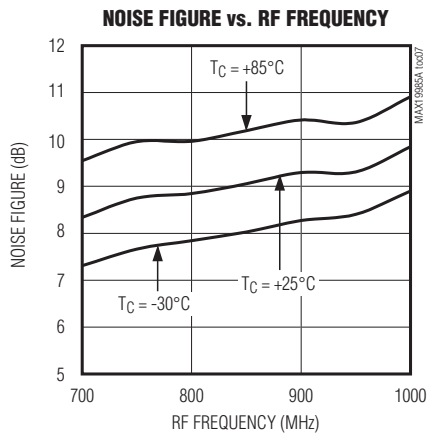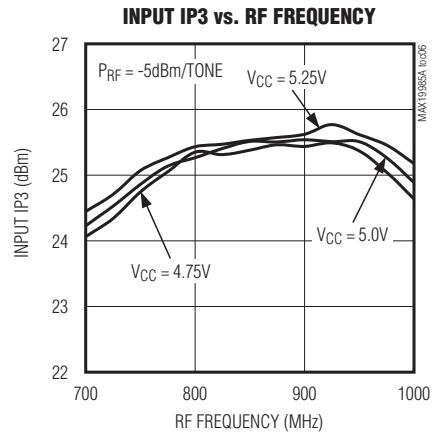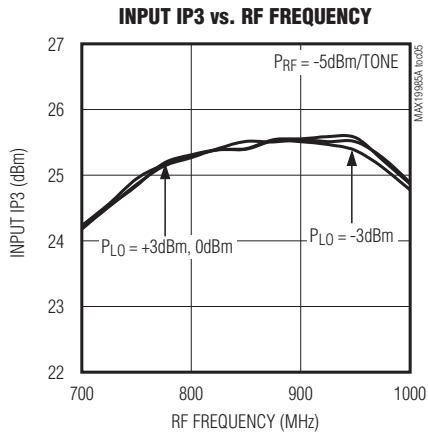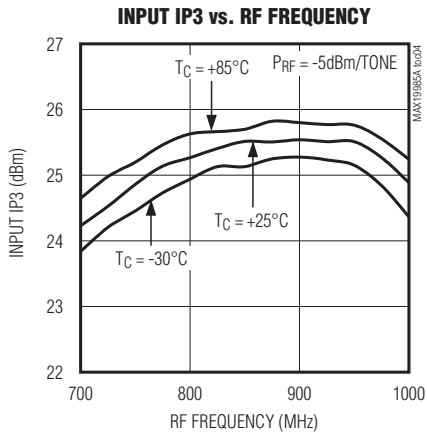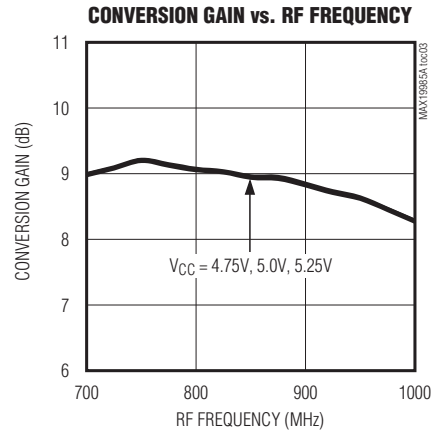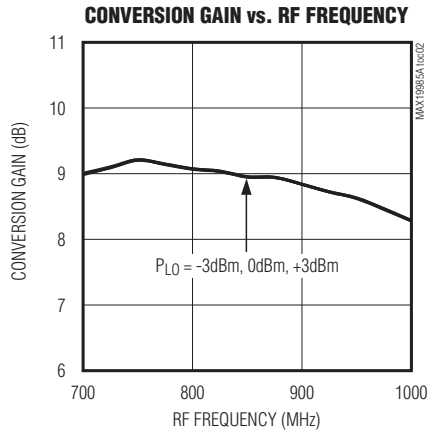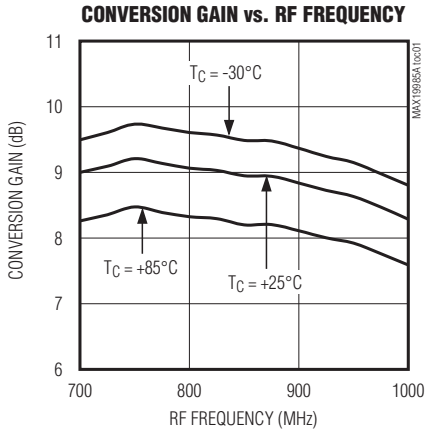

Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

Typical Operating Characteristics (continued)

(Typical Application Circuit, $V_{CC} = +5.0V$, $P_{LO} = 0dBm$, $P_{RF} = -5dBm$, LO is high-side injected for a 200MHz IF, $T_C = +25^\circ C$, unless otherwise noted.)

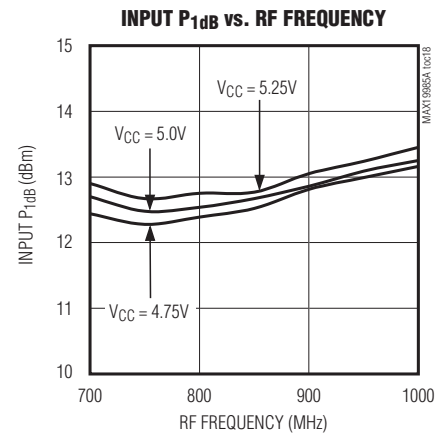
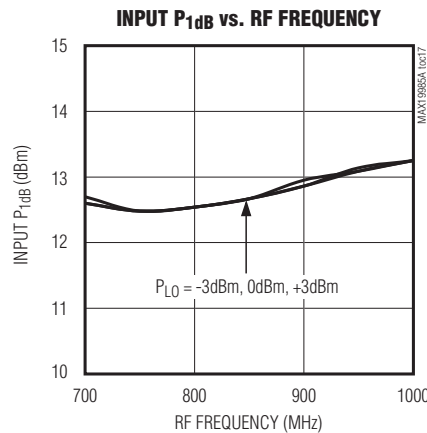
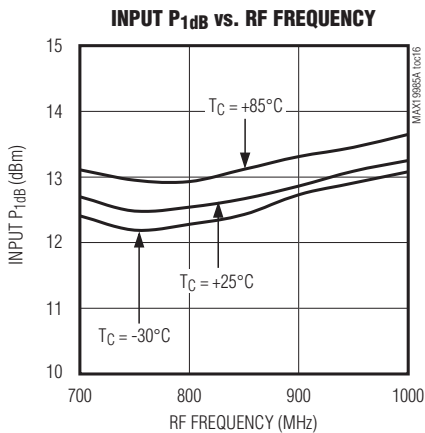
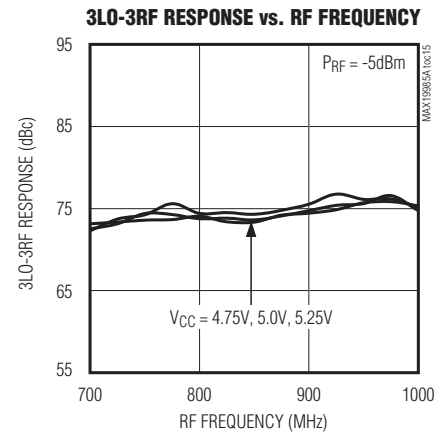
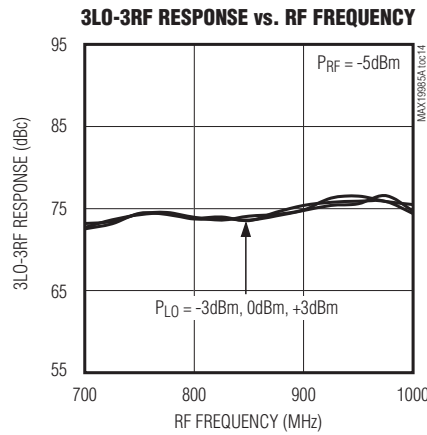
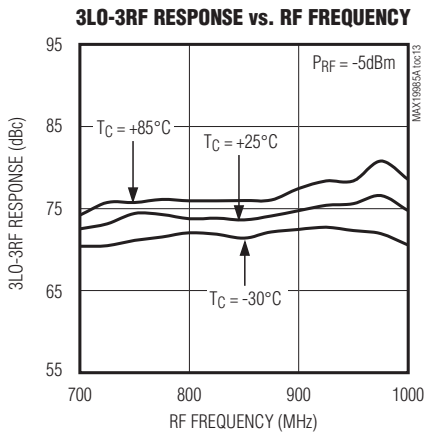
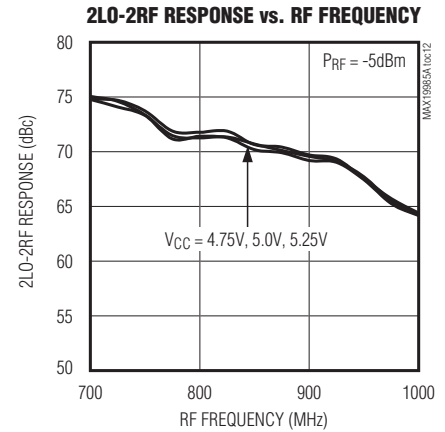
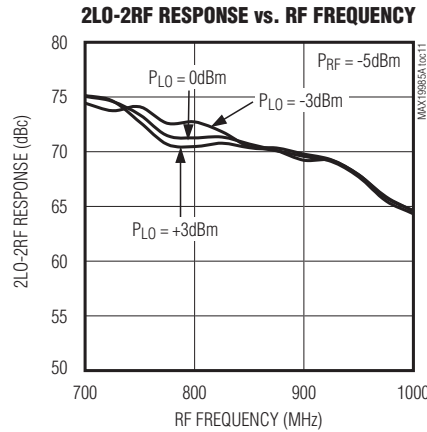
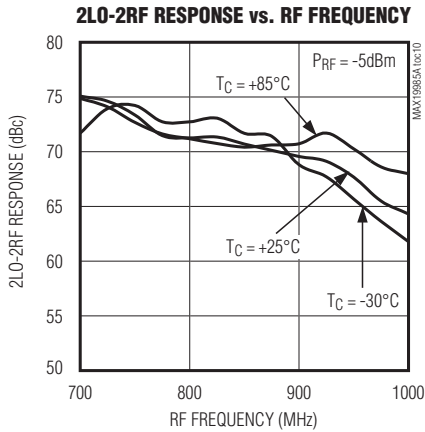


Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

MAX19985A

Typical Operating Characteristics (continued)










(Typical Application Circuit, $V_{CC} = +5.0V$, $P_{LO} = 0dBm$, $P_{RF} = -5dBm$, LO is high-side injected for a 200MHz IF, $T_C = +25^\circ C$, unless otherwise noted.)

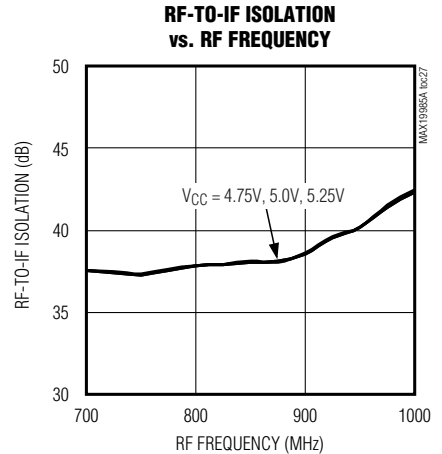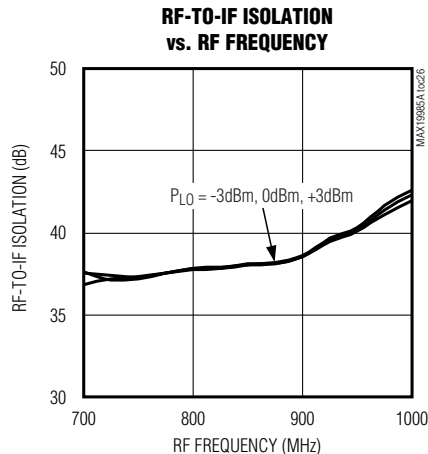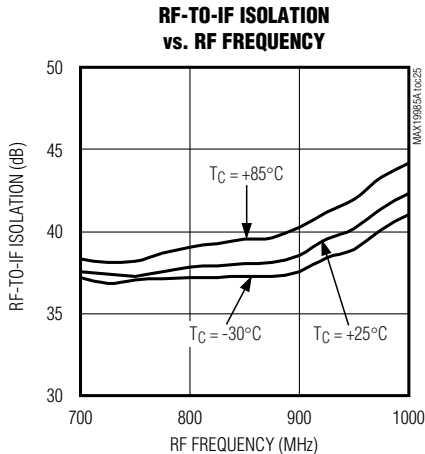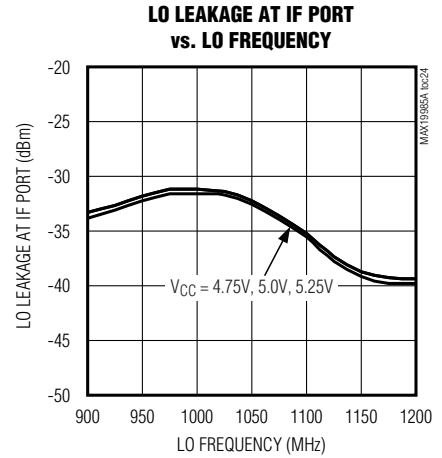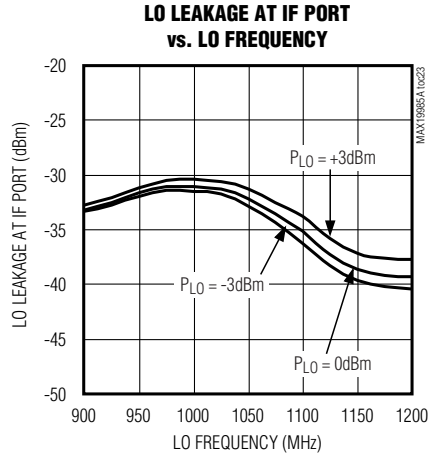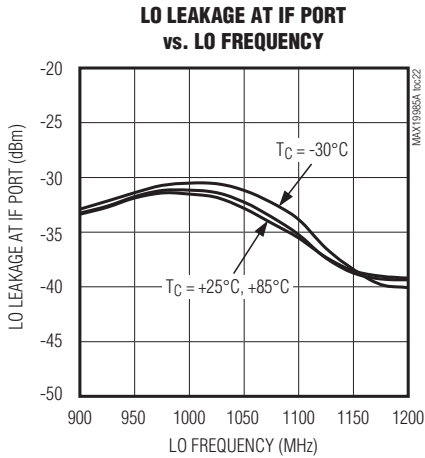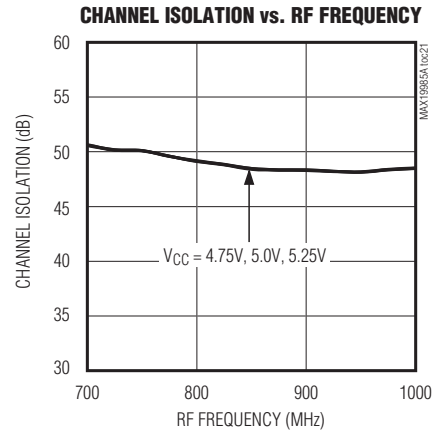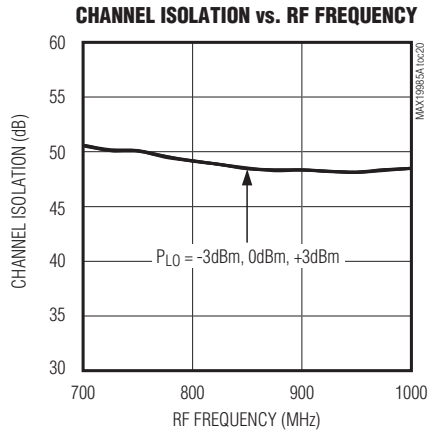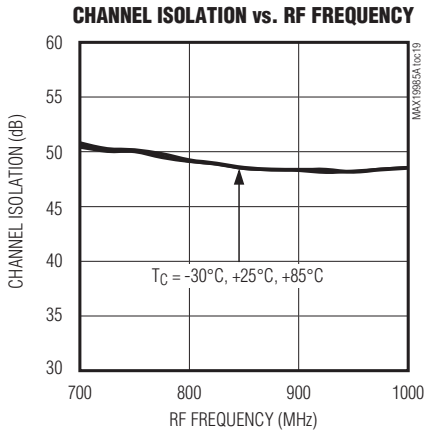

Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

Typical Operating Characteristics (continued)

(Typical Application Circuit, $V_{CC} = +5.0V$, $P_{LO} = 0dBm$, $P_{RF} = -5dBm$, LO is high-side injected for a 200MHz IF, $T_C = +25^\circ C$, unless otherwise noted.)

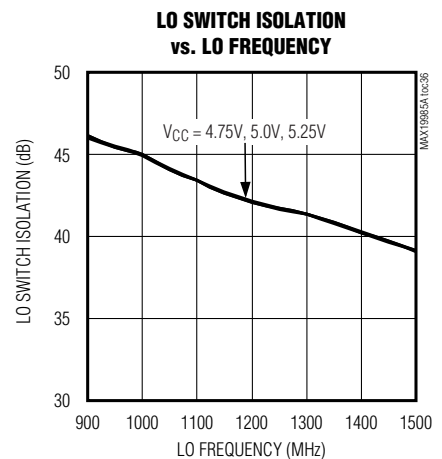
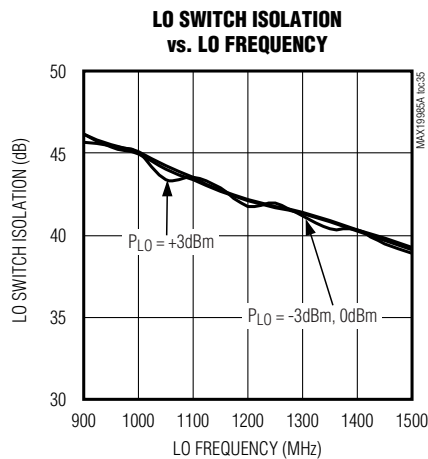
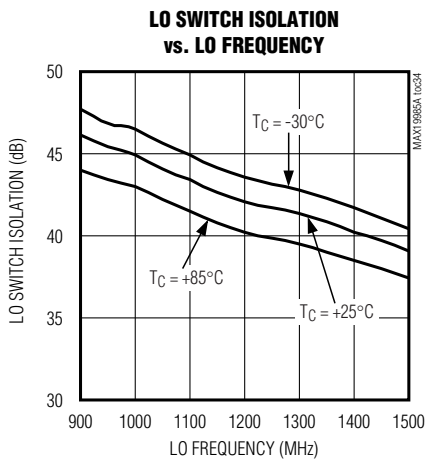
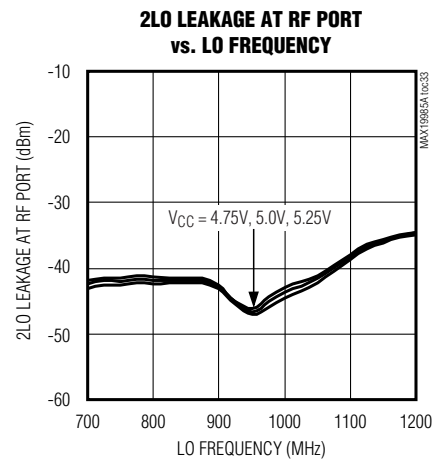
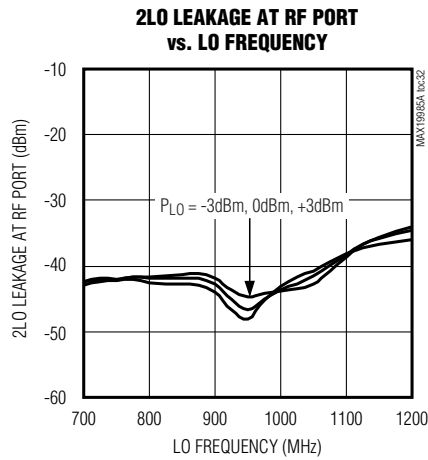
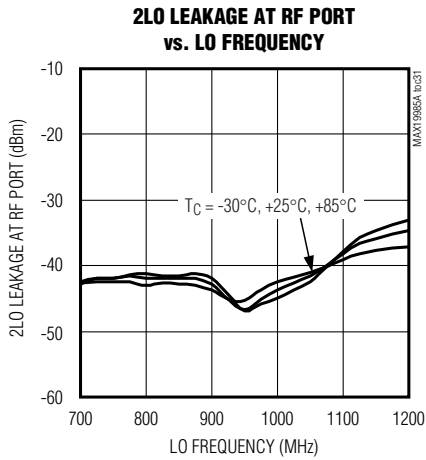
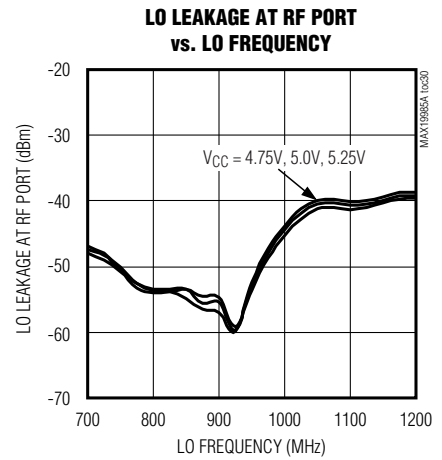
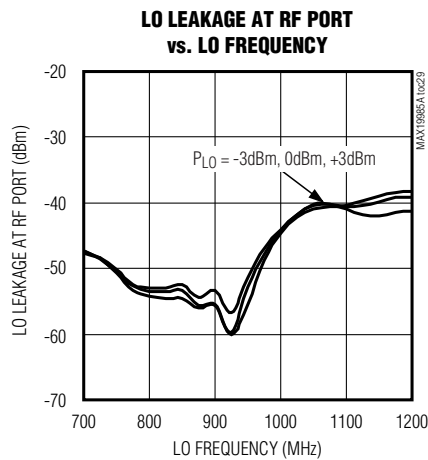
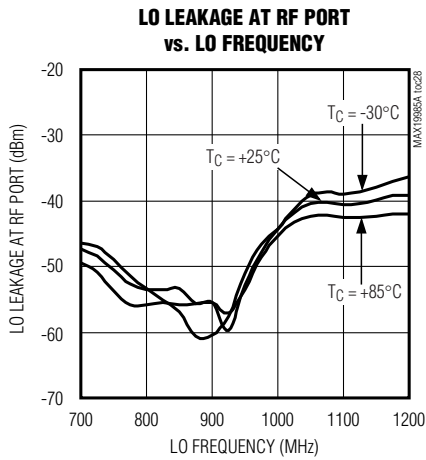


Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

MAX19985A

Typical Operating Characteristics (continued)








(Typical Application Circuit, $V_{CC} = +5.0V$, $P_{LO} = 0dBm$, $P_{RF} = -5dBm$, LO is high-side injected for a 200MHz IF, $T_C = +25^\circ C$, unless otherwise noted.)

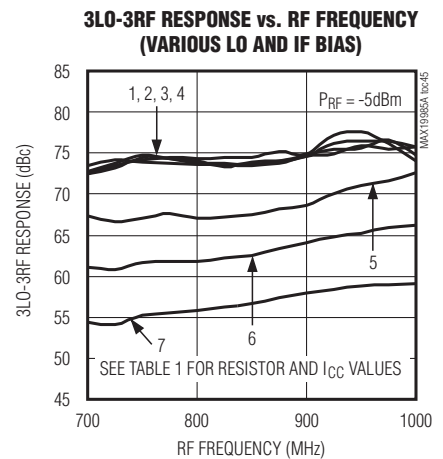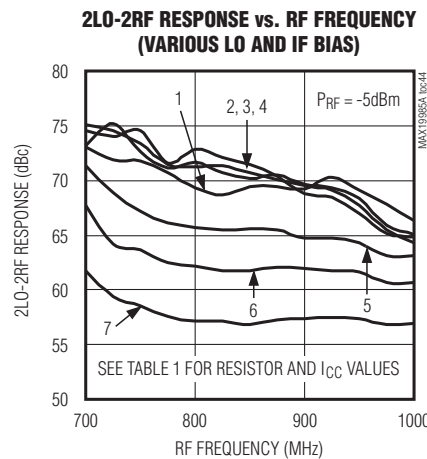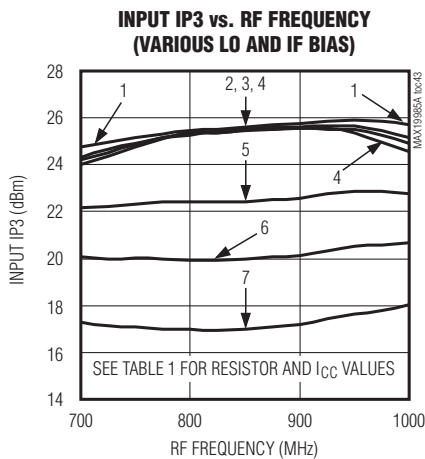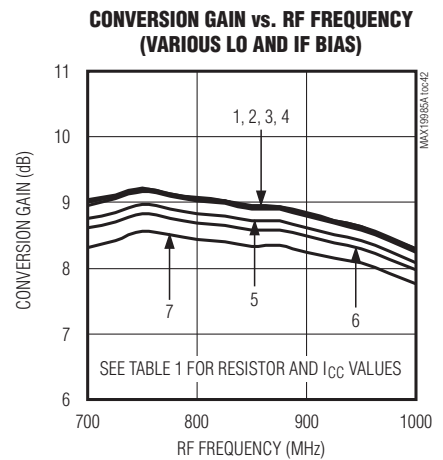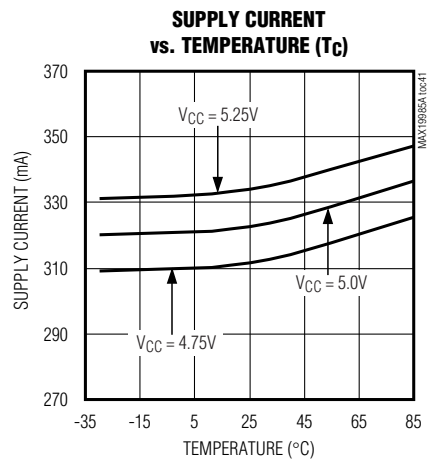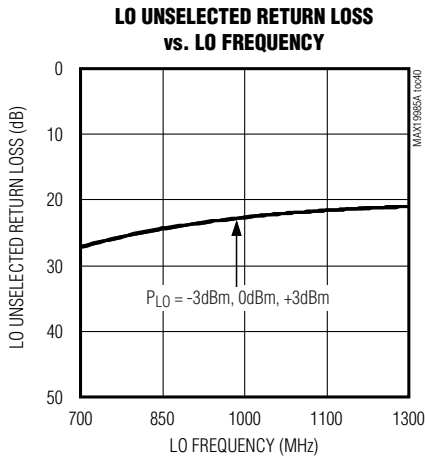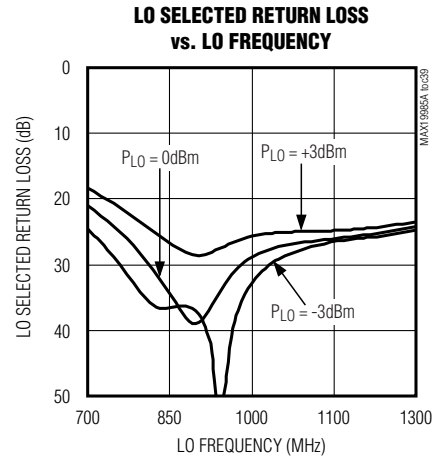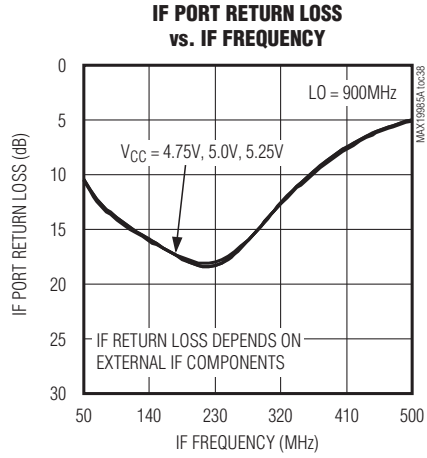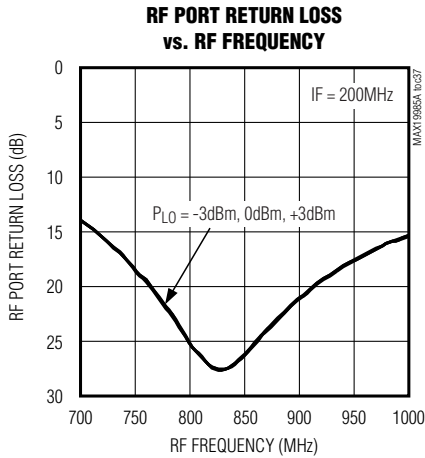

Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

Typical Operating Characteristics (continued)

(Typical Application Circuit, $V_{CC} = +5.0V$, $P_{LO} = 0dBm$, $P_{RF} = -5dBm$, LO is high-side injected for a 200MHz IF, $T_C = +25^\circ C$, unless otherwise noted.)



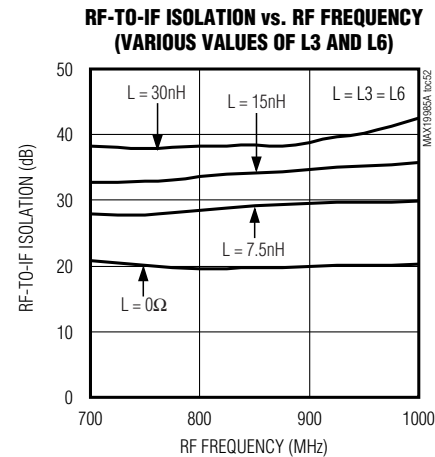
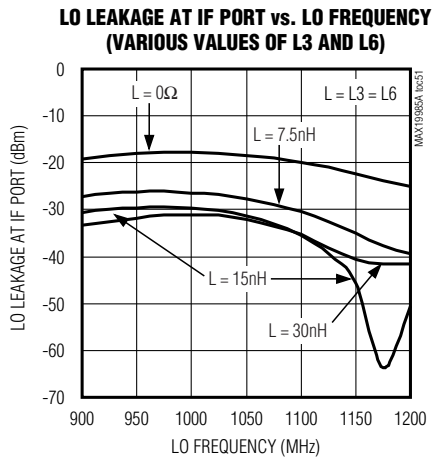
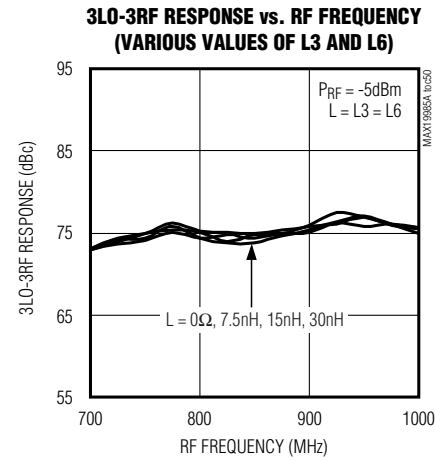
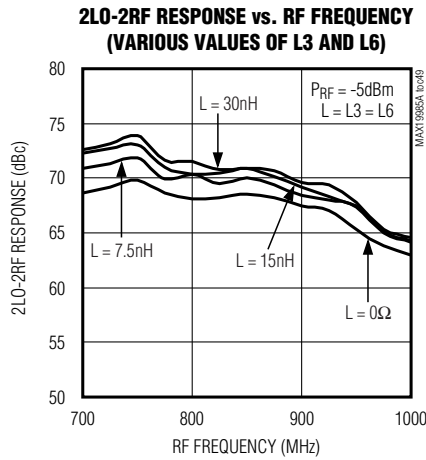
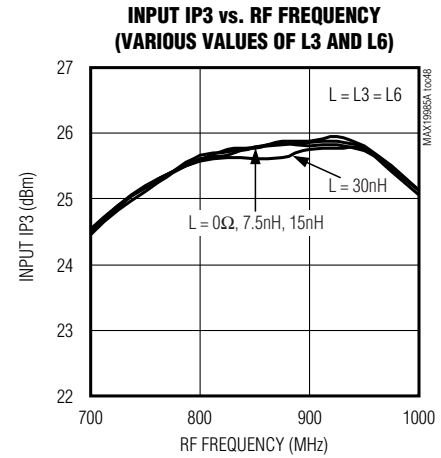
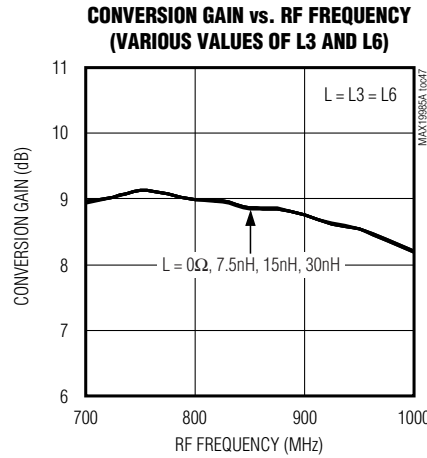
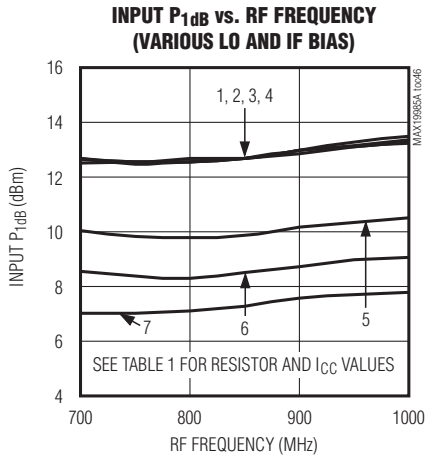


Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

MAX19985A

Typical Operating Characteristics (continued)










(Typical Application Circuit, $V_{CC} = +3.3V$, $P_{LO} = 0dBm$, $P_{RF} = -5dBm$, LO is high-side injected for a 200MHz IF, $T_C = +25^\circ C$, unless otherwise noted.)

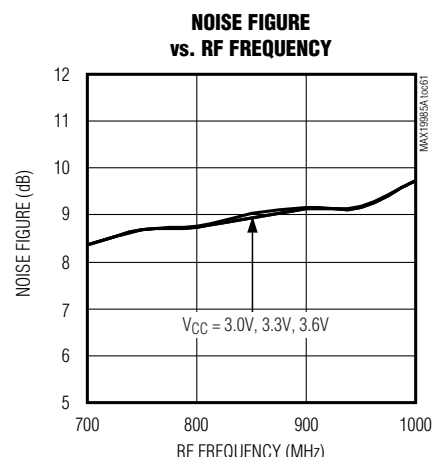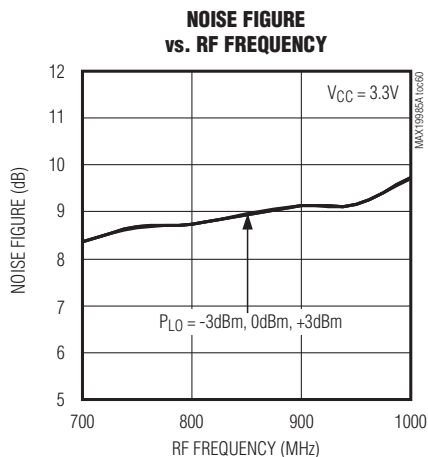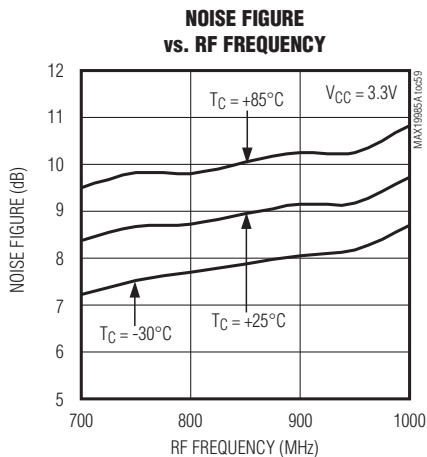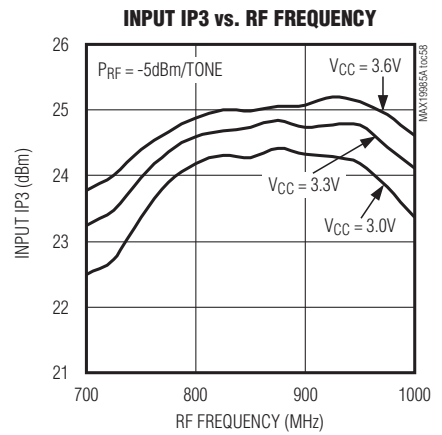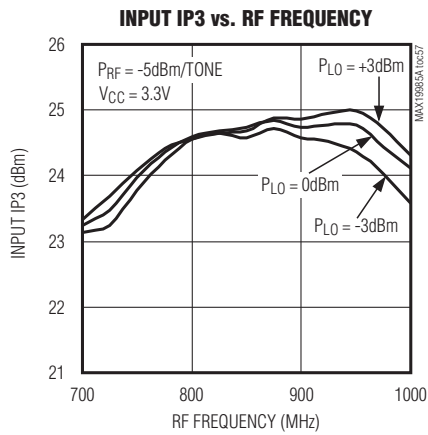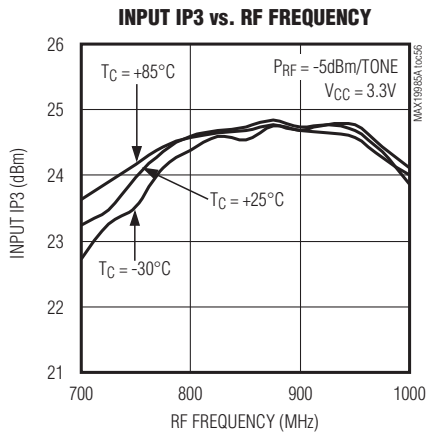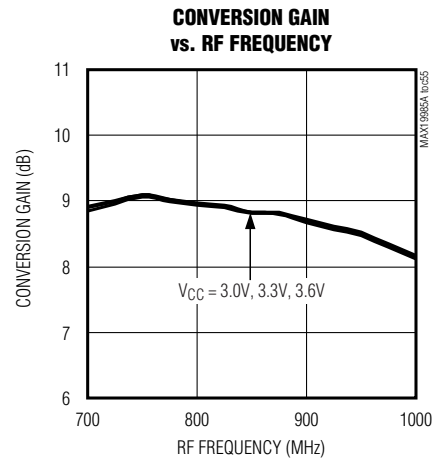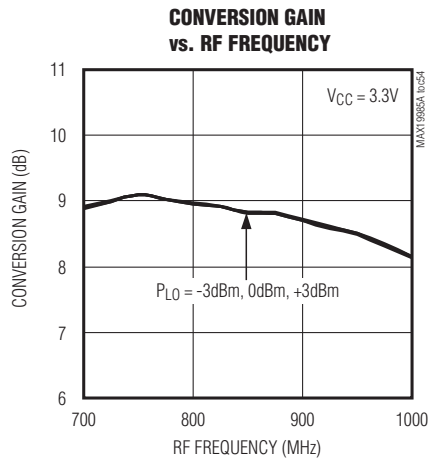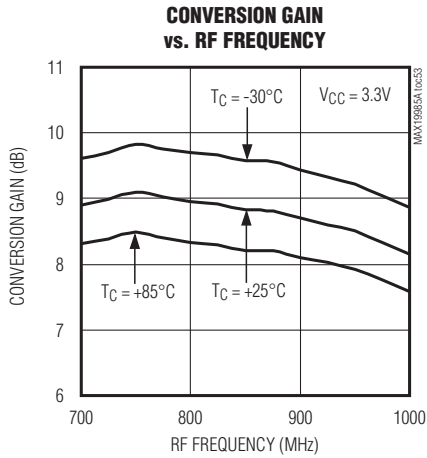

Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

Typical Operating Characteristics (continued)

(Typical Application Circuit, $V_{CC} = +3.3V$, $P_{LO} = 0dBm$, $P_{RF} = -5dBm$, LO is high-side injected for a 200MHz IF, $T_C = +25^\circ C$, unless otherwise noted.)

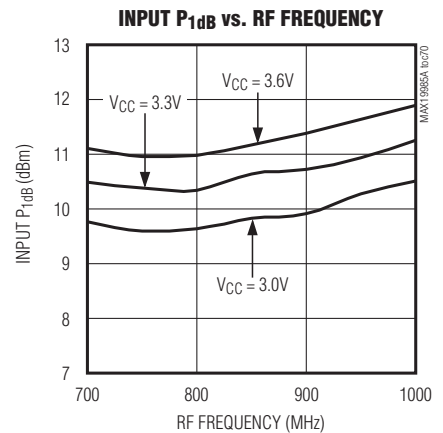
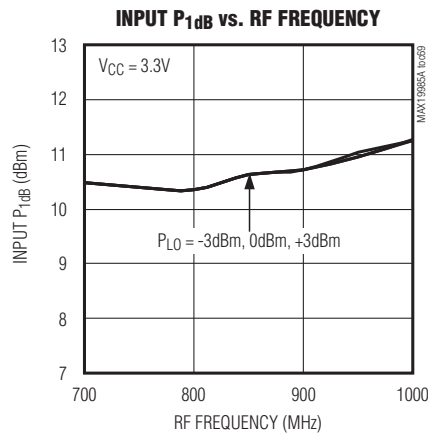
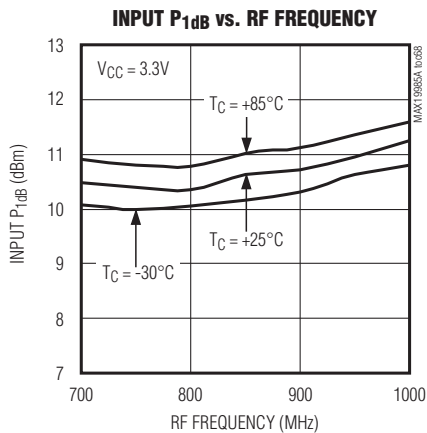
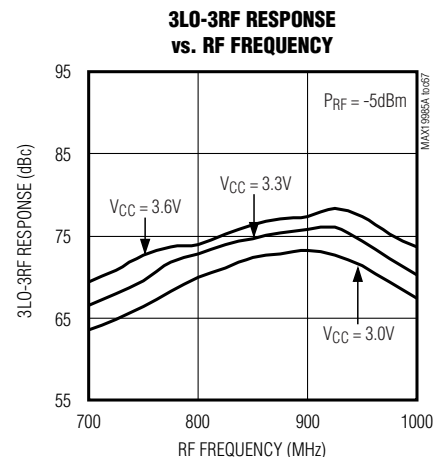
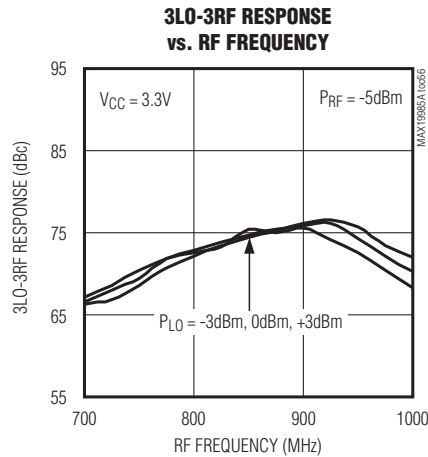
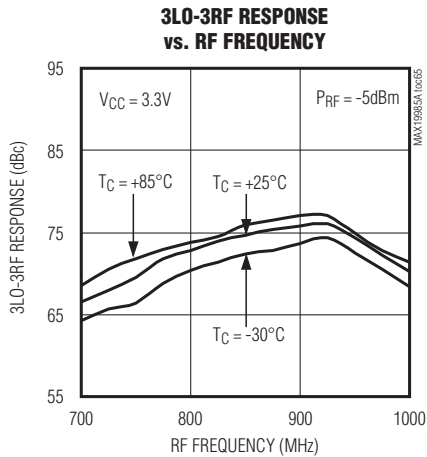
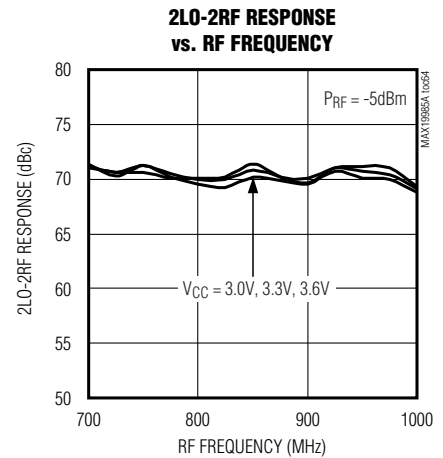
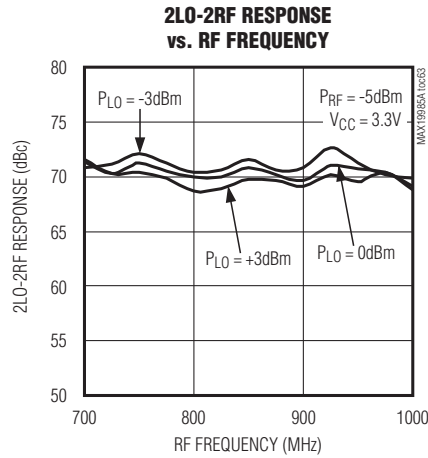
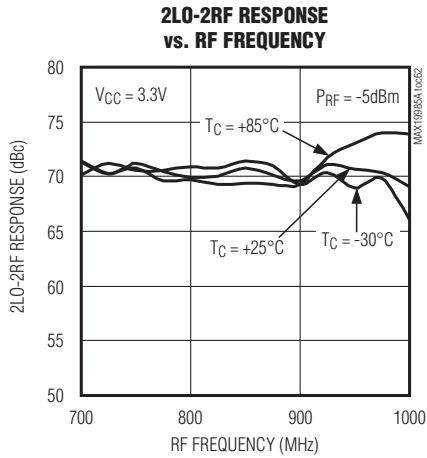


Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

MAX19985A

Typical Operating Characteristics (continued)










(Typical Application Circuit, $V_{CC} = +3.3V$, $P_{LO} = 0dBm$, $P_{RF} = -5dBm$, LO is high-side injected for a 200MHz IF, $T_C = +25^\circ C$, unless otherwise noted.)

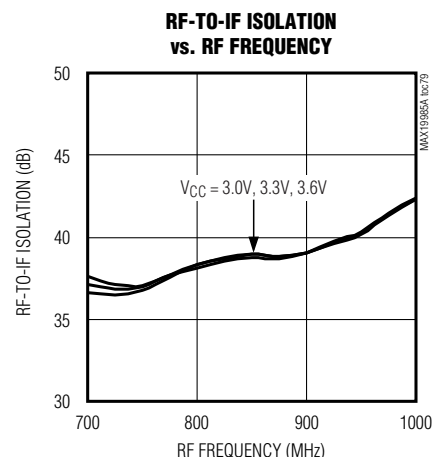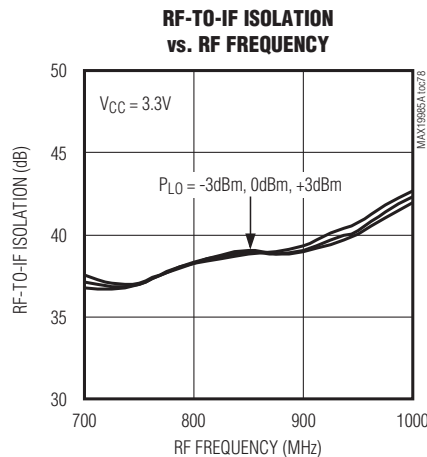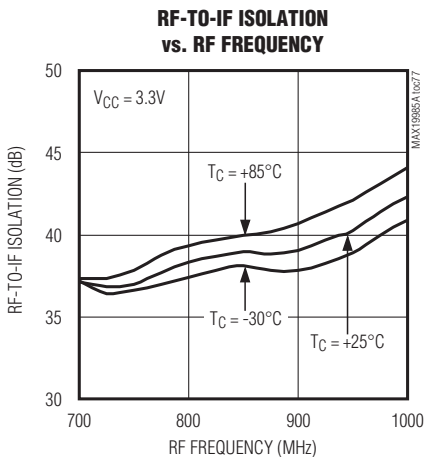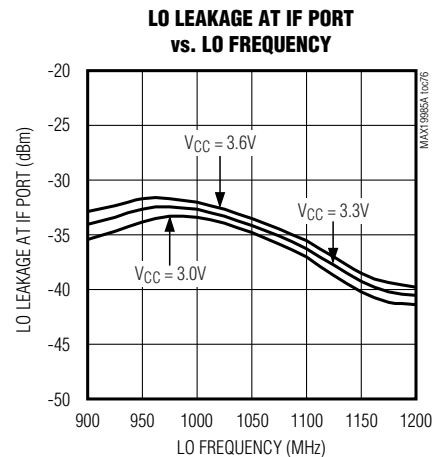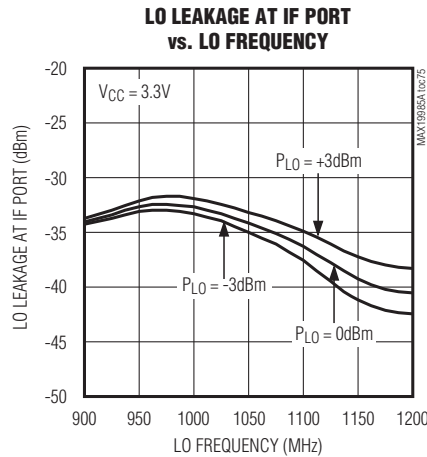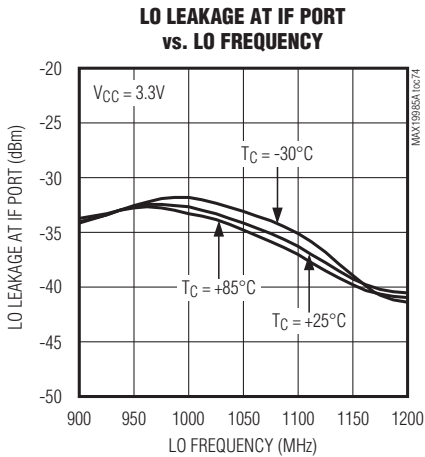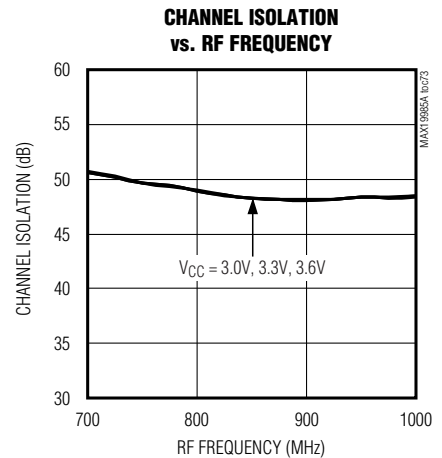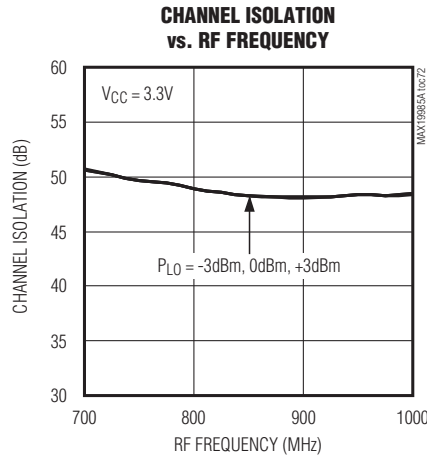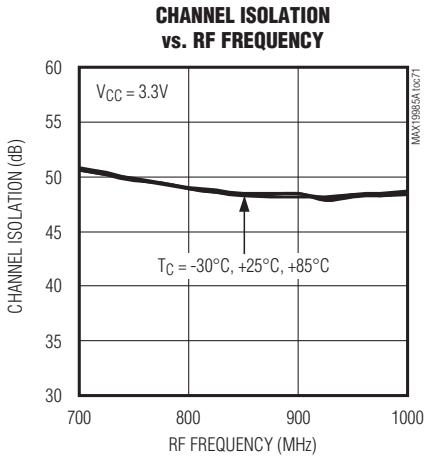

Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

Typical Operating Characteristics (continued)

(Typical Application Circuit, $V_{CC} = +3.3V$, $P_{LO} = 0dBm$, $P_{RF} = -5dBm$, LO is high-side injected for a 200MHz IF, $T_C = +25^\circ C$, unless otherwise noted.)

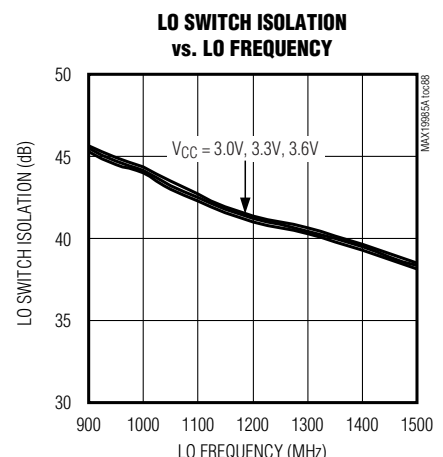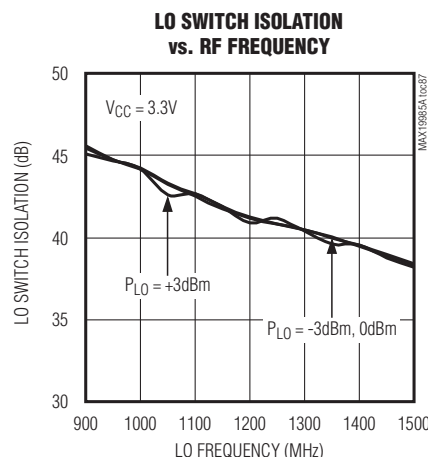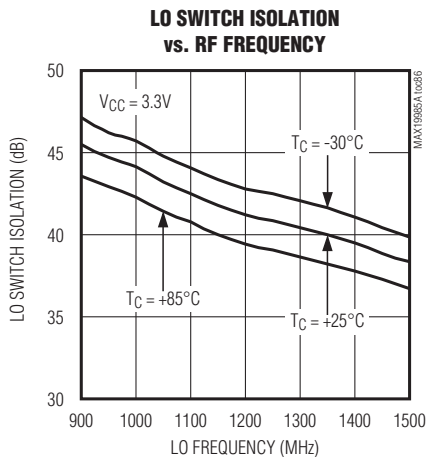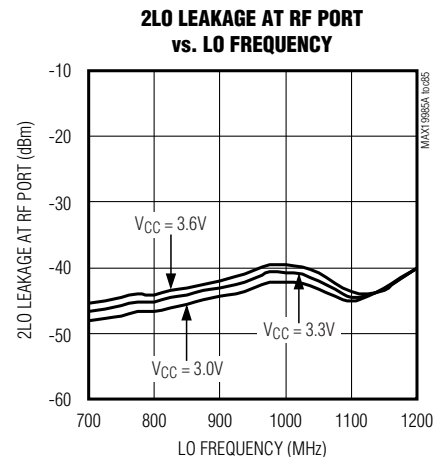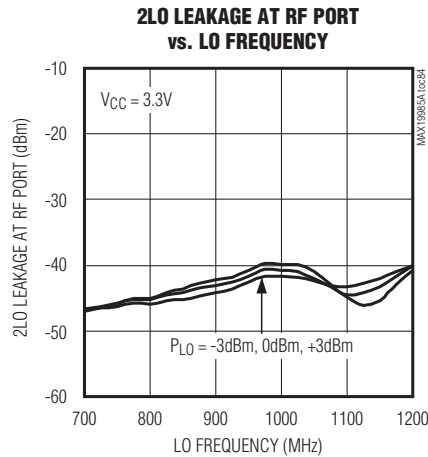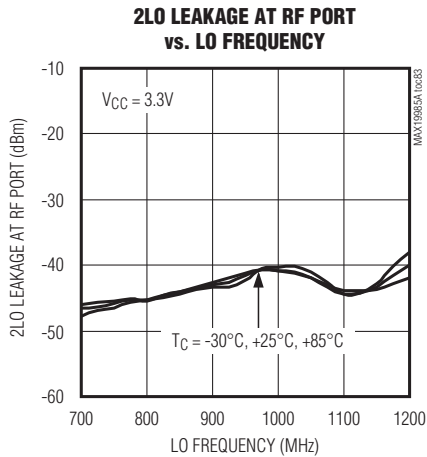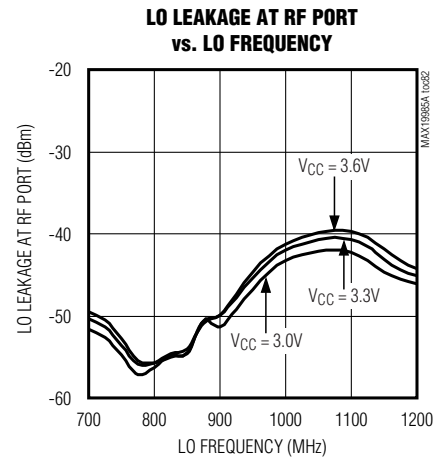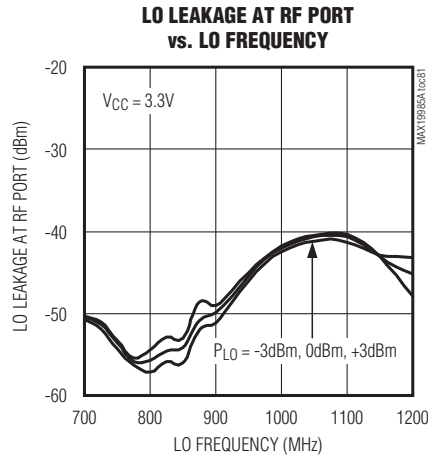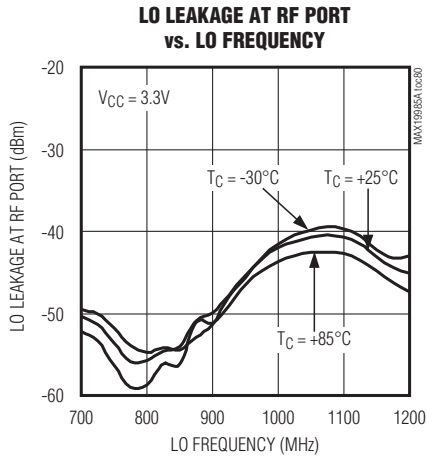

Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

MAX19985A

Typical Operating Characteristics (continued)

(Typical Application Circuit, $V_{CC} = +3.3V$, $P_{LO} = 0dBm$, $P_{RF} = -5dBm$, LO is high-side injected for a 200MHz IF, $T_C = +25^\circ C$, unless otherwise noted.)

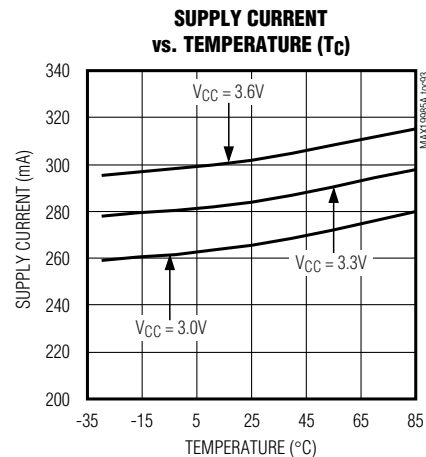
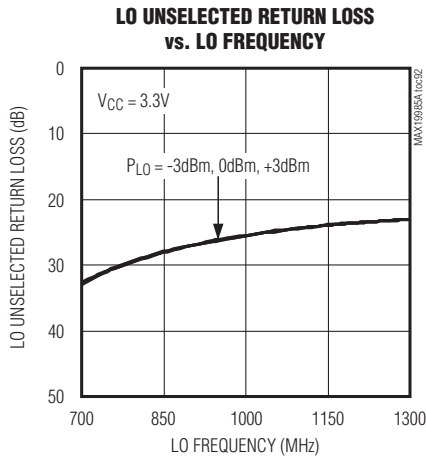
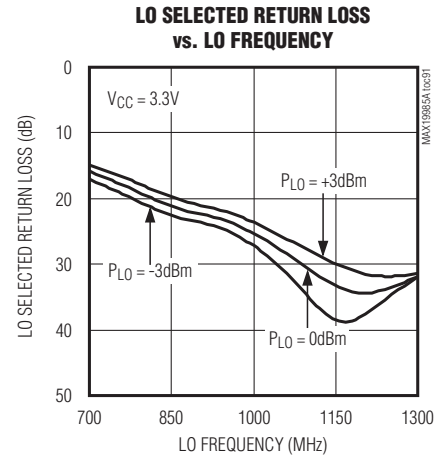
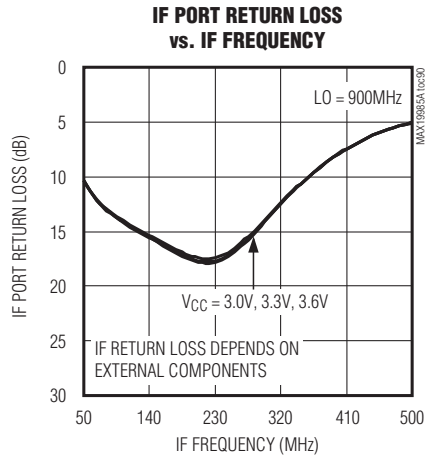
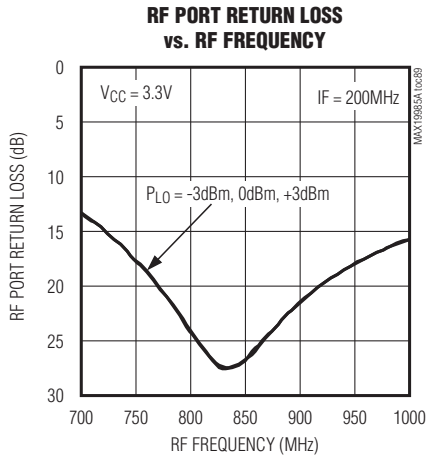


Table 1. DC Current vs. Bias Resistor Settings

| BIAS CONDITION | DC CURRENT (mA) | R1 AND R4 VALUES (Ω) | R2 AND R5 VALUES (Ω) |
|----------------|-----------------|-------------------------------|-------------------------------|
| 1 | 359.4 | 698 | 800 |
| 2 | 331.8 | 698 | 1100 |
| 3 | 322.8 | 698 | 1200 |
| 4 | 311.7 | 698 | 1400 |
| 5 | 268.2 | 1100 | 1200 |
| 6 | 244.4 | 1400 | 1200 |
| 7 | 223.7 | 1820 | 1200 |

Note: See TOCs 42–46 for performance trade-offs vs. DC bias condition.

Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

Pin Description

| PIN | NAME | FUNCTION |
|-------------------------------------|------------|--|
| 1 | RFMAIN | Main Channel RF input. Internally matched to 50Ω. Requires an input DC-blocking capacitor. |
| 2 | TAPMAIN | Main Channel Balun Center Tap. Bypass to GND with 39pF and 0.033μF capacitors as close as possible to the pin with the smaller value capacitor closer to the part. |
| 3, 5, 7, 12, 20, 22, 24, 25, 26, 34 | GND | Ground |
| 4, 6, 10, 16, 21, 30, 36 | VCC | Power Supply. Bypass to GND with 0.01μF capacitors as close as possible to the pin. Pins 4 and 6 do not require bypass capacitors. |
| 8 | TAPDIV | Diversity Channel Balun Center Tap. Bypass to GND with 39pF and 0.033μF capacitors as close as possible to the pin with the smaller value capacitor closer to the part. |
| 9 | RFDIV | Diversity Channel RF Input. Internally matched to 50Ω. Requires an input DC-blocking capacitor. |
| 11 | IFDBIAS | IF Diversity Amplifier Bias Control. Connect a resistor from this pin to ground to set the bias current for the diversity IF amplifier (see the <i>Typical Operating Characteristics</i> for typical performance vs. resistor value). |
| 13, 14 | IFD+, IFD- | Diversity Mixer Differential IF Outputs. Connect pullup inductors from each of these pins to VCC (see the <i>Typical Application Circuit</i>). |
| 15 | LEXTD | Diversity External Inductor Connection. Connect a parallel combination of an inductor and a 500Ω resistor from this pin to ground to increase the RF-to-IF and LO-to-IF isolation (see the <i>Typical Operating Characteristics</i> for typical performance vs. inductor value). |
| 17 | LODBIAS | LO Diversity Amplifier Bias Control. Connect a resistor from this pin to ground to set the bias current for the diversity LO amplifier (see the <i>Typical Operating Characteristics</i> for typical performance vs. resistor value). |
| 18, 28 | N.C. | No Connection. Not internally connected. |
| 19 | LO1 | Local Oscillator 1 Input. This input is internally matched to 50Ω. Requires an input DC-blocking capacitor. |
| 23 | LOSEL | Local Oscillator Select. Set this pin to high to select LO1. Set to low to select LO2. |
| 27 | LO2 | Local Oscillator 2 Input. This input is internally matched to 50Ω. Requires an input DC-blocking capacitor. |
| 29 | LOMBIAS | LO Main Amplifier Bias Control. Connect a resistor from this pin to ground to set the bias current for the main LO amplifier (see the <i>Typical Operating Characteristics</i> for typical performance vs. resistor value). |
| 31 | LEXTM | Main External Inductor Connection. Connect a parallel combination of an inductor and a 500Ω resistor from this pin to ground to increase the RF-to-IF and LO-to-IF isolation (see <i>Typical Operating Characteristics</i> for typical performance vs. inductor value). |
| 32, 33 | IFM-, IFM+ | Main Mixer Differential IF Outputs. Connect pullup inductors from each of these pins to VCC (see the <i>Typical Application Circuit</i>). |
| 35 | IFMBIAS | IF Main Amplifier Bias Control. Connect a resistor from this pin to ground to set the bias current for the main IF amplifier (see the <i>Typical Operating Characteristics</i> for typical performance vs. resistor value). |
| — | EP | Exposed Pad. Internally connected to GND. Connect to a large ground plane using multiple vias to maximize thermal and RF performance. |

Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

MAX19985A

Detailed Description

The MAX19985A is a dual-channel downconverter designed to provide 8.7dB of conversion gain, +25.5dBm of IIP3, +12.6dBm typical input 1dB compression point, and a 9.0dB noise figure.

In addition to its high-linearity performance, the MAX19985A achieves a high level of component integration. The device integrates two double-balanced mixers for two-channel downconversion. Both the main and diversity channels include a balun and matching circuitry to allow 50Ω single-ended interfaces to the RF ports and the two LO ports. An integrated single-pole/double-throw (SPDT) switch provides 50ns switching time between the two LO inputs with 46dB of LO-to-LO isolation and -40dBm of LO leakage at the RF port. Furthermore, the integrated LO buffers provide a high drive level to each mixer core, reducing the LO drive required at the MAX19985A's inputs to a range of -3dBm to +3dBm. The IF ports for both channels incorporate differential outputs for downconversion, which is ideal for providing enhanced 2LO-2RF performance.

Specifications are guaranteed over broad frequency ranges to allow for use in WCDMA, GSM/EDGE, iDEN, cdma2000, and LTE/WiMAX cellular and 700MHz band base stations. The MAX19985A is specified to operate over an RF input range of 700MHz to 1000MHz, an LO range of 900MHz to 1300MHz, and an IF range of 50MHz to 500MHz. The external IF components set the lower frequency range (see the *Typical Operating Characteristics* for details). Operation beyond these ranges is possible (see the *Typical Operating Characteristics* for additional information). Although this device is optimized for high-side LO injection applications, it can operate in low-side LO injection modes as well. However, performance degrades as f_{LO} continues to decrease. For increased low-side LO performance, refer to the MAX19985 data sheet.

RF Port and Balun

The RF input ports of both the main and diversity channels are internally matched to 50Ω, requiring no external matching components. A DC-blocking capacitor is required as the input is internally DC shorted to ground through the on-chip balun. The RF port input return loss is typically 20dB over the RF frequency range of 770MHz to 915MHz.

LO Inputs, Buffer, and Balun

The MAX19985A is optimized for a 900MHz to 1300MHz LO frequency range. As an added feature, the MAX19985A includes an internal LO SPDT switch for use in frequency-hopping applications. The switch selects one of the two single-ended LO ports, allowing the external oscillator to settle on a particular frequency before it is switched in. LO switching time is typically 50ns, which is more than adequate for typical GSM applications. If frequency hopping is not employed, simply set the switch to either of the LO inputs. The switch is controlled by a digital input (LOSEL), where logic-high selects LO1 and logic-low selects LO2. LO1 and LO2 inputs are internally matched to 50Ω, requiring only an 82pF DC-blocking capacitor. To avoid damage to the part, voltage **MUST** be applied to VCC before digital logic is applied to LOSEL. Alternatively, a 1kΩ resistor can be placed in series at the LOSEL to limit the input current in applications where LOSEL is applied before VCC.

The main and diversity channels incorporate a two-stage LO buffer that allows for a wide-input power range for the LO drive. The on-chip low-loss baluns, along with LO buffers, drive the double-balanced mixers. All interfacing and matching components from the LO inputs to the IF outputs are integrated on-chip.

High-Linearity Mixer

The core of the MAX19985A dual-channel downconverter consists of two double-balanced, high-performance passive mixers. Exceptional linearity is provided by the large LO swing from the on-chip LO buffers. When combined with the integrated IF amplifiers, the cascaded IIP3, 2LO-2RF rejection, and noise figure performance are typically +25.5dBm, 76dBc, and 9.0dB, respectively.

Differential IF

The MAX19985A has an IF frequency range of 50MHz to 500MHz, where the low-end frequency depends on the frequency response of the external IF components. Note that these differential ports are ideal for providing enhanced IIP2 performance. Single-ended IF applications require a 4:1 (impedance ratio) balun to transform the 200Ω differential IF impedance to a 50Ω single-ended system. After the balun, the return loss is typically 18dB. The user can use a differential IF amplifier on the mixer IF ports, but a DC block is required on both IFD+/IFD- and IFM+/IFM- ports to keep external DC from entering the IF ports of the mixer.

Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

Applications Information

Input and Output Matching

The RF and LO inputs are internally matched to 50Ω. No matching components are required. The RF port input return loss is typically 20dB over the RF frequency range of 770MHz to 915MHz and return loss at the LO ports are typically 20dB over the entire LO range. RF and LO inputs require only DC-blocking capacitors for interfacing.

The IF output impedance is 200Ω (differential). For evaluation, an external low-loss 4:1 (impedance ratio) balun transforms this impedance to a 50Ω single-ended output (see the *Typical Application Circuit*).

Externally Adjustable Bias

Each channel of the MAX19985A has two pins (LO_BIAS, IF_BIAS) that allow external resistors to set the internal bias currents. Nominal values for these resistors are given in Table 2. Larger-value resistors can be used to reduce power dissipation at the expense of some performance loss. See the *Typical Operating Characteristics* to evaluate the power vs. performance tradeoff. If ±1% resistors are not readily available, ±5% resistors can be substituted.

LEXT_ Inductors

For applications requiring optimum RF-to-IF and LO-to-IF isolation, connect a parallel combination of a low-ESR inductor and a 500Ω resistor from LEXT_ (pins 15 and 31) to ground. When improved isolation is not required, connect LEXT_ to ground using a 0Ω resistance. See the *Typical Operating Characteristics* to evaluate the isolation vs. inductor value tradeoff.

Layout Considerations

A properly designed PCB is an essential part of any RF/microwave circuit. Keep RF signal lines as short as possible to reduce losses, radiation, and inductance. The load impedance presented to the mixer must be so that any capacitance from both IF- and IF+ to ground does not exceed several picofarads. For the best performance, route the ground pin traces directly to the exposed pad under the package. The PCB exposed pad **MUST** be connected to the ground plane of the PCB. It is suggested that multiple vias be used to connect this pad to the lower-level ground planes. This method provides a good RF/thermal-conduction path for the device. Solder the exposed pad on the bottom of the

Table 2. Component Values

| COMPONENT | VALUE | DESCRIPTION |
|------------------------------|---------|--|
| C1, C2, C7, C8 | 39pF | Microwave capacitors (0402) |
| C3, C6 | 0.033μF | Microwave capacitors (0603) |
| C4, C5 | — | Not used |
| C9, C13, C15, C17, C18 | 0.01μF | Microwave capacitors (0402) |
| C10, C11, C12, C19, C20, C21 | 150pF | Microwave capacitors (0603) |
| C14, C16 | 82pF | Microwave capacitors (0402) |
| L1, L2, L4, L5 | 330nH | Wire-wound high-Q inductors (0805) |
| L3, L6 | 30nH | Wire-wound high-Q inductors (0603). Smaller values can be used at the expense of some performance loss (see the <i>Typical Operating Characteristics</i>). |
| R1, R4 | 698Ω | ±1% resistors (0402). Larger values can be used to reduce power at the expense of some performance loss (see the <i>Typical Operating Characteristics</i>). |
| R2, R5 | 1.2kΩ | ±1% resistors (0402). Use for V_{CC} = +5.0V applications. Larger values can be used to reduce power at the expense of some performance loss (see the <i>Typical Operating Characteristics</i>). |
| | 600Ω | ±1% resistors (0402). Use for V_{CC} = +3.3V applications. |
| R3, R6 | 0Ω | ±1% resistors (1206) |
| R7, R8 | 500Ω | ±1% resistors (0402) |
| T1, T2 | 4:1 | Transformers (200:50) Mini-Circuits TC4-1W-7A |
| U1 | — | MAX19985A IC |

Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

device package to the PCB. The MAX19985A evaluation kit can be used as a reference for board layout. Gerber files are available upon request at www.maxim-ic.com.

Power-Supply Bypassing

Proper voltage-supply bypassing is essential for high-frequency circuit stability. Bypass each VCC pin and TAPMAIN/TAPDIV with the capacitors shown in the *Typical Application Circuit* (see Table 2 for component values). Place the TAPMAIN/TAPDIV bypass capacitors to ground within 100 mils of the pin.


Exposed Pad RF/Thermal Considerations

The exposed pad (EP) of the MAX19985A's 36-pin thin QFN-EP package provides a low thermal-resistance path to the die. It is important that the PCB on which the MAX19985A is mounted be designed to conduct heat from the EP. In addition, provide the EP with a low-inductance path to electrical ground. The EP **MUST** be soldered to a ground plane on the PCB, either directly or through an array of plated via holes.

MAX19985A


Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

Typical Application Circuit

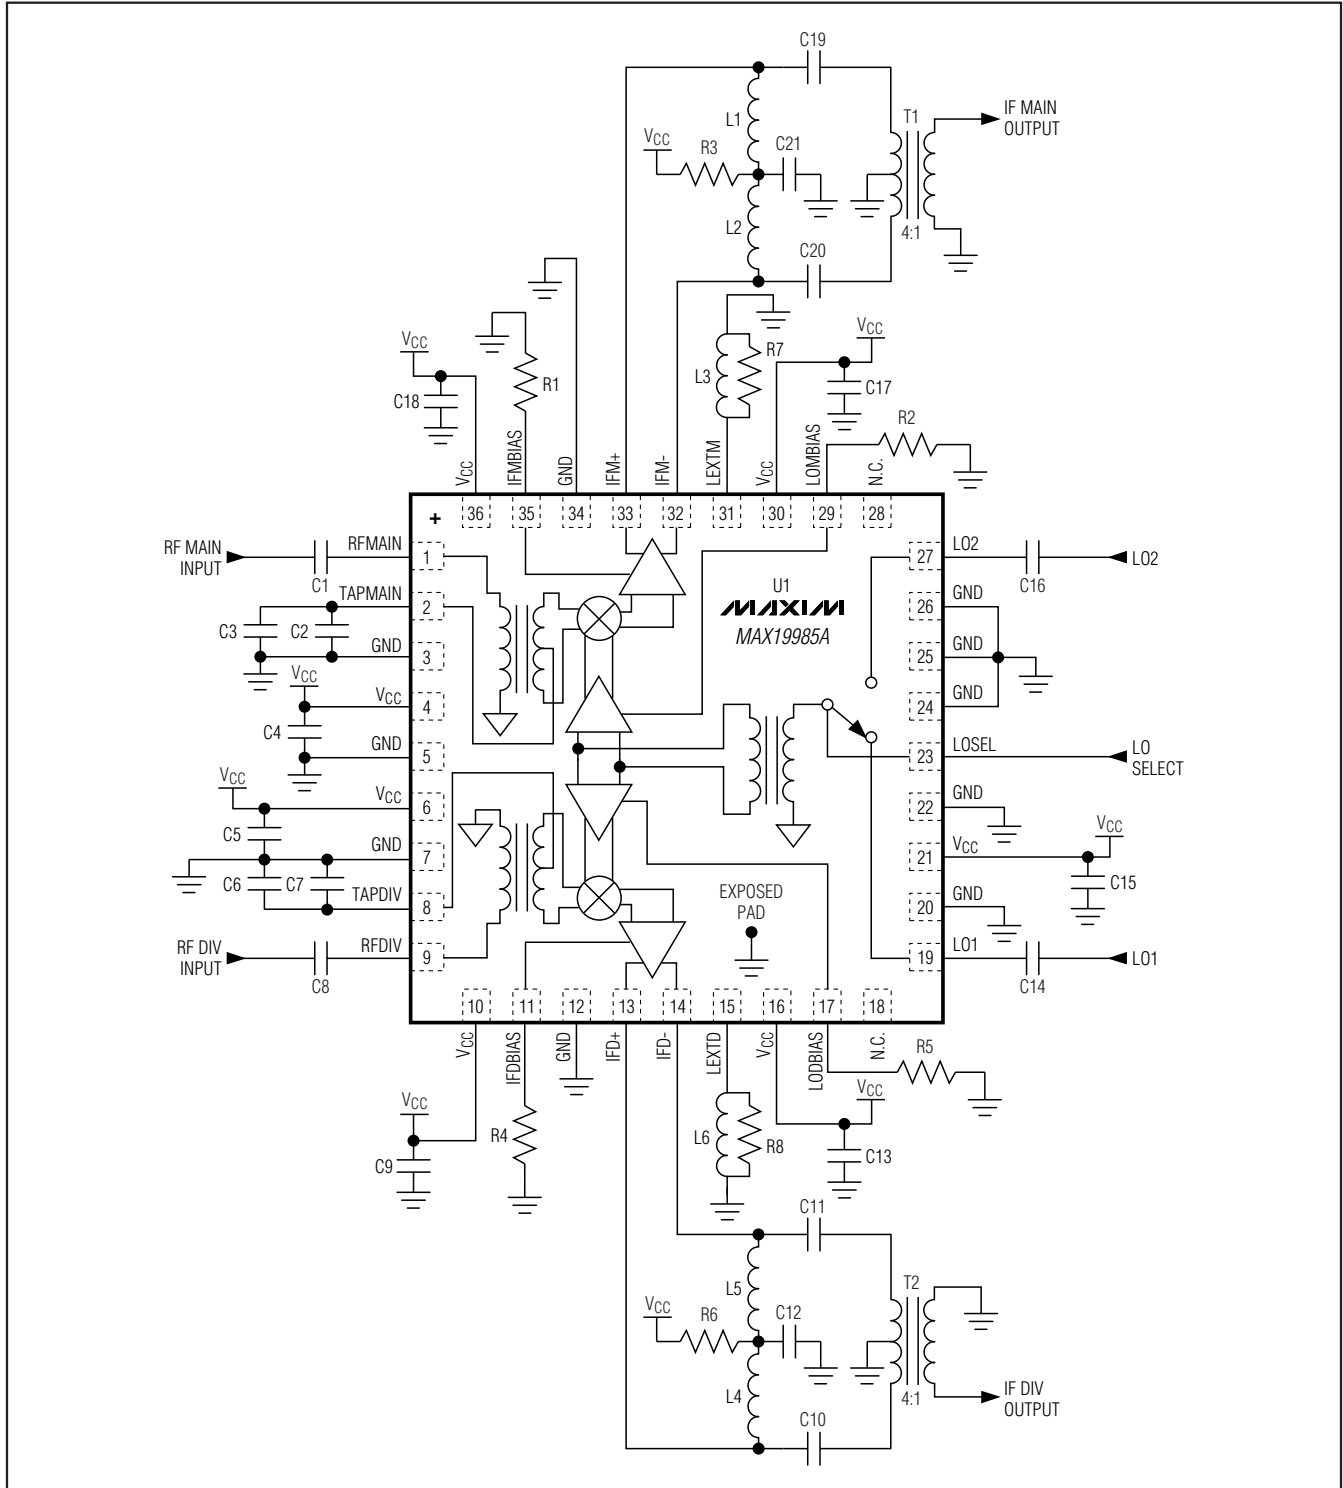

Dual, SiGe, High-Linearity, 700MHz to 1000MHz Downconversion Mixer with LO Buffer/Switch

Pin Configuration/Functional Diagram

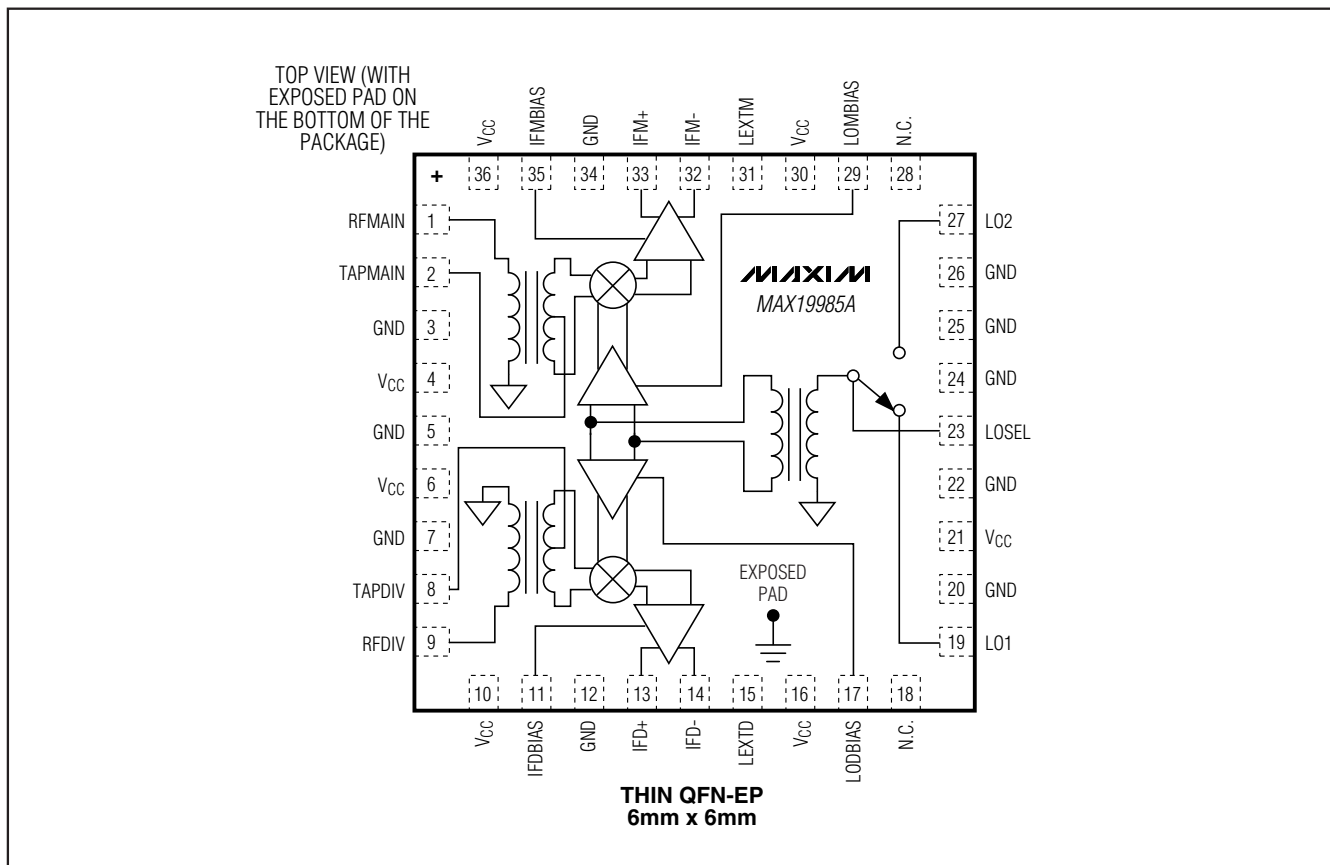

MAX19985A

Chip Information

PROCESS: SiGe BiCMOS

Package Information

For the latest package outline information and land patterns, go to www.maxim-ic.com/packages.

| PACKAGE TYPE | PACKAGE CODE | DOCUMENT NO. |
|----------------|--------------|-------------------------|
| 36 Thin QFN-EP | T3666+2 | 21-0141 |

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 23