




# 121-190 Annular Convoluted Tubing with External Braid

**For non-environmental EMI/RFI applications**




### How To Order

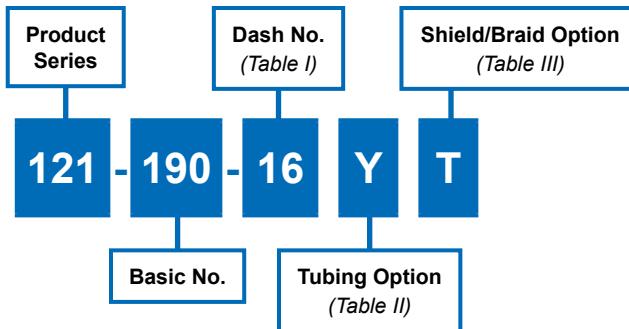

Dash No	A Inside Dia		B Outside Dia	
	Min	Max	Min	Max
09	.24 (6.1)	.28 (7.1)	.42 (10.7)	.46 (11.7)
12	.33 (8.4)	.37 (9.4)	.52 (13.2)	.56 (14.2)
16	.45 (11.4)	.50 (12.7)	.64 (16.3)	.70 (17.8)
20	.57 (14.5)	.62 (15.7)	.75 (19.1)	.81 (20.6)
24	.69 (17.5)	.75 (19.1)	.92 (23.4)	.98 (24.9)
28	.81 (20.6)	.87 (22.1)	1.04 (26.4)	1.12 (28.4)
32	.93 (23.6)	1.00 (25.4)	1.16 (29.5)	1.24 (31.5)
40	1.18 (30.0)	1.25 (31.8)	1.40 (35.6)	1.48 (37.6)
52	1.56 (39.6)	1.63 (41.4)	1.81 (46.0)	1.89 (48.0)

Y	Kynar/Thermally stabilized
V	PVDF/Not thermally stabilized
S	Siltem/Medium duty

T	Tin/Copper
C	Stainless Steel
N	Nickel Copper
L	ArmorLite™
D	Dacron
M	Nomex
E	AmberStrand® 100%
F	AmberStrand® 75%/25%

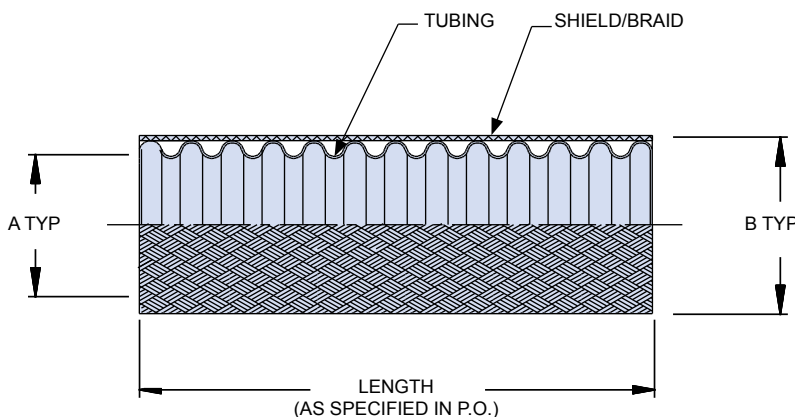

### Packaging

Long-length orders of 121-190 braided conduit are subject to carrier weight and box size restrictions. For example, UPS air shipments are currently limited to 50 lbs. per box. Unless otherwise specified, Glennair standard practice is to ship optimal lengths of product based on weight, size, and individual carrier specifications. Consult factory for additional information or to specify packaging requirements.