

1. THIS SPECIFICATION SHALL COVER THE CHARACTERISTICS OF CERAMIC FILTER WITH 421KHz,INTENED FOR USE IN TRANSCEIVERS,ETC.
2. PART NUMBER : LT421AW
3. ELECTRONICAL SPECIFICATIONS
 - A. CENTRE FREQUENCY (f_o) : 421KHz ± 1.0KHz. MAX.
 - B. BAND WIDTH AT 6 dB : ± 10 KHzMIN.(TO 421KHz)
 - C. BAND WIDTH AT 50 dB : ± 20 KHz MAX.(TO 421KHz)
 - D. STOP BAND ATTENUATION : 45 dB MIN.(AT f_o ± 100KHz)
 - E. RIPPLE : 2.0 dB MAX.(AT f_o ± 5.0KHz)
 - F. INSERTION LOSS : 4.0 dB MAX (AT THE SMALLEST LOSS)

G. TEMPRATURE COEFFICIENT
OF CENTER FRENQUENCY : ±50PPM/°C Max.(-20 TO +80°C)

H. INPUT/OUTPUT IMPEDANCE : 1.5 KΩ

NOTE : A) CENTER FREQUENCY SHALL BE DEFIED AS THE CENTRAL
VALUE OF THE BAND WITH AT 6 dB

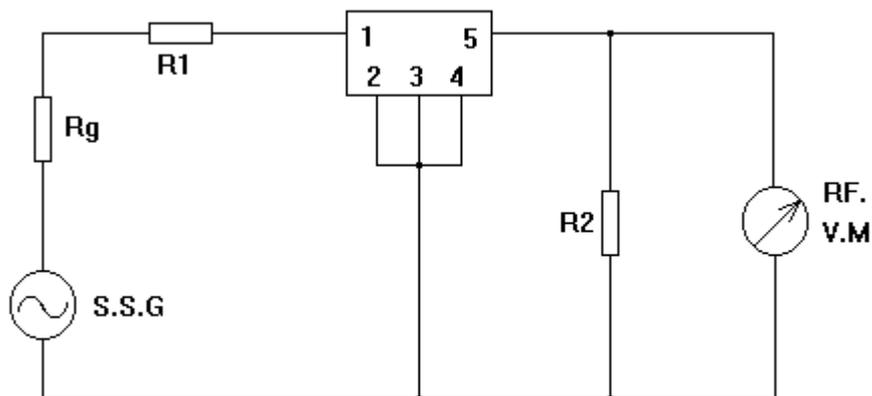
B) TEMPRATURE COEFFICIENT OF CENTER FREQUENCY
SHALL BE DEFINED AS THE AVERAGE OF THE CENTRAL
FREQUECY.

4. MEASUREMENT

A. ENVIRONMENTAL CONDITION

MEASUREMENT SHALL BE CARRIED OUT AT THE REFERENCE
TEMPERATURE OF 25°C ± 2°C. IT SHALL BE POSSIBLY DONE
AT 5°C TO 35°C UNLESS IT IS QUESTIONABLE.

B. MEASURING CIRCUIT



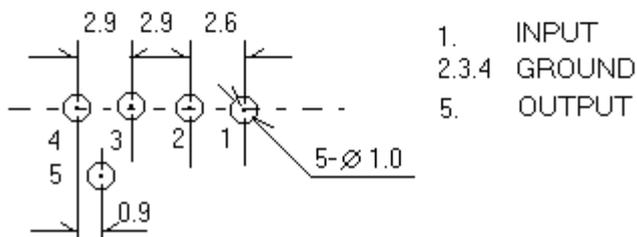

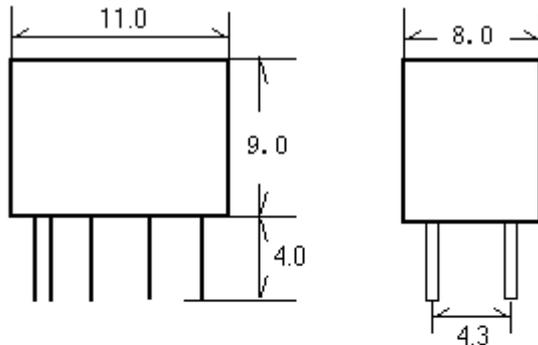
Rg+R1=R2=Input/Output Impedance

#S.S.G. (STANDARD SIGNAL GENERATION)

R.F.V.M. (RADIO FREQUENCY VOLTAGE METER)

Rg+R1=R2=1.5 KΩ

C<=50 PF

5. DIMENSIONS(MM)

6. ENVIRONMENTAL CHARACTERISTICS
6-1 HIGH TEMPERATURE EXPOSURE

SUBJECT THE FILTER TO $+80^{\circ}\text{C}$ FOR 96 HOURS. THEN RELEASE THE FILTER INTO THE SPECIFICATIONS IN TABLE 1.

6-2 MOISURE

KEEP THE FILTER AT 40°C AND 95% RH FOR 96 HOURS. THEN RELEASE THE FILTER INTO THE ROOM CONDITIONS FOR 1 TO 2 HOURS PRIOR TO THE MEASUREMENT. IT SHALL FULFILL THE SPECIFICATIONS IN TABLE 1.

6-3 LOW TEMPERATURE EXPOSURE

SUBJECT THE FILTER TO -20°C FOR 96 HOURS. THEN RELEASE THE FILTER INTO THE ROOM CONDITIONS FOR 1 TO 2 HOURS PRIOR TO THE MEASUREMENT. IT SHALL FULFILL THE SPECIFICATIONS IN TABLE 1.

6-4 TEMPERATURE CYCLING

SUBJECT THE FILTER TO A LOW TEMPERATURE OF -55°C FOR 30 MINUTES. FOLLOWSING BY A HIGH TEMPERATURE OF $+85^{\circ}\text{C}$ FOR 30 MINUTES. THEN RELEASE THE FILTER INTO THE ROOM CONDITIONS FOR 1 TO 2 HOURS PRIOR TO THE MESUREMENT. IT SHALL MEET THE SPECIFICATIONS IN TABLE 1.

6-5 RESISTANCE TO SOLDER HEAT



DIP THE FILTER TERMINALS NO CLOSER THAN 1.5mm INTO THE SOLDER BATH AT 270°C ±10°C FOR 10±1 SEC. THEN RELEASE THE FILTER INTO THE ROOM CONDITIONS FOR 1 TO 2 HOURS. THE FILTER SHALL MEET THE SPECIFICATIONS IN TABLE 1.

6-6 MECHANICAL SHOCK

DROP THE FILTER RANDOMLY ONTO THE CONCRETE FLOOR FROM THE HEIGHT OF 30cm 3 TIMES.THE FILTER SHALL FULFILL THE SPECIFICATIONS IN TABLE 1.

6-7 VIBRATION

SUBJECT THE FILTER TO THE VIBRATION FOR 1 HOUR EACH IN X,Y AND Z AXES WITH THE AMPLITUDE OF 1.5 mm AT 10 TO 55 Hz. THE FILTER SHALL FULFILLTHE SPECIFICATIONS IN TABLE 1.

6-8 LEAD FATIGUE

6-8-1 PULLING TEST

WEIGHT ALONG WITH THE DIRECTION OF LEAD WITHOUT AN SHOCK 3 KG. THE FILTER SHALL SATISFY ALL THE INITIALL CHARACTERISTICS.

6-8-2 BENDING TEST

LEAD SHALL BE SUBJECT TO WITHSTAND AGAINST 90°C BENDING IN THE DERECTION OF THICKNESS. THIS OPERATION SHALL BE DONE TOWARD BOTH DIRECTION. THE FILTER SHALL SHOW NO EVIDENCE OF DAMAGE AND SHALL

SATISFY

ALL THE INITIAL ELECTRICAL CHARACTERISTICS.

TABLE 1

ITEM	SPECIFICATION
CENTRE FREQUENCY(f。)	421±1.0 KHz Max
BAND WIDTH(6 dB)	±10 KHz Min
SELECTIVITY(50dB)	±20 KHz Max
STOP BAND ATTENUATION	45 dB Min
RIPPLE	2.0 dB Max
INSERTION LOSS	4 dB Max