

“SSG” series 32.768 KHz Surface Mount Crystal



MERCURY
Since 1973

- RoHS compliant product
- Provide low cost timing to real time clocks and hand-held portable battery operated devices.
- Rugged high-temp plastic molded package for harsh environment.
- Withstand solder reflow. Tape and reel available.




RoHS Compliant Product
by Mercury

Specifications

MEC Part No.	SSG-32.768K-12.5P, RoHS compliant
Nominal Frequency	32.768 kHz
Crystal Cut	X-cut
Frequency Tolerance	±30 ppm at +25°C
Turnover Temperature	25°C±5°C
Operating Temperature	-40 to +80°C
Frequency-Temperature Coefficient	-0.034 ppm±0.006 ppm/°C ²
Load Capacitance	12.5 pF
Motional Capacitance (Co)	0.003 pF typical
Shunt Capacitance (C1)	1.35 pF max.
Capacitance Ratio (Co/C1)	450 typical
Equivalent Series Resistance	50 K ohms max.
Drive Level	1 uW max.
Insulation Resistance	500 MΩ min. at 100V±15V DC
Aging	±3 ppm per year max. at +25°C
Package Leak Rate	1x10 ⁻² μPam ³ /sec max.
Shock Resistance	±5 ppm max. at 3000Gx0.3 msec. half sine wave 3 directions
Storage Temperature	-55 to +125°C
Tape and Reel	13” reel. 3000 pc per reel.

Package Dimensions and Suggested Soldering Pattern

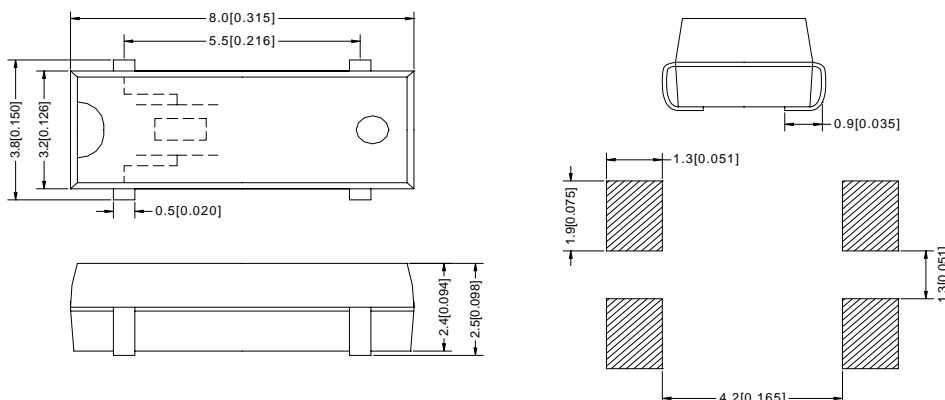

MERCURY www.mercury-crystal.com

Taiwan: TEL (886)-2-2406-2779, FAX (886)-2-2496-0769, e-mail: sales-tw@mercury-crystal.com
U.S.A.: TEL (1)-909-466-0427, FAX (1)-909-466-0762, e-mail: sales-us@mercury-crystal.com