


RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- High speed switching

PACKAGING INFORMATION

- Glass Passivated
- Case: Molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Weight: 0.4300 grams (approximately)

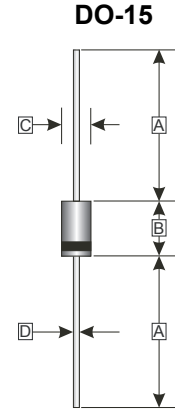

REF.	Millimeter	
	Min.	Max.
A	25.4 (TYP)	
B	5.80	7.62
C	2.60	3.60
D	-	0.90

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

PARAMETERS	SYMBOL	PART NUMBERS							UNITS	TESTING CONDITIONS	
		HER 201 G	HER 202 G	HER 203 G	HER 204 G	HER 205 G	HER 206 G	HER 207 G			
Recurrent Reverse Voltage (Max.)	V_{RRM}	50	100	200	400	600	800	1000	V		
RMS Voltage (Max.)	V_{RMS}	35	70	140	280	420	560	700	V		
DC Blocking Voltage (Max.)	V_{DC}	50	100	200	400	600	800	1000	V		
Instantaneous Forward Voltage (Max.)	V_F	1.00		1.30		1.85			V	$I_F = 2A$	
Average Forward Rectified Current (Max.)	I_O	2.0							A	0.375" (9.5mm) lead length @ $T_A = 50^\circ C$	
Peak Forward Surge Current	I_{FSM}	60							A	8.3ms single half sine-wave superimposed on rated load (JEDEC method)	
DC Reverse Current (Max.)	I_R	5.0							μA	$V_R = V_{RRM}, T_A = 25^\circ C$	
		150								$V_R = V_{RRM}, T_A = 100^\circ C$	
Reverse Recovery Time (Max.)	T_{RR}	50				70			nS	$I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A$	
Junction Capacitance (Typ.)	C_J	30							pF	$f = 1MHz$ and applied 4V DC reverse voltage	
Storage Temperature Range	T_{STG}	-65 ~ 150								$^\circ C$	

RATINGS AND CHARACTERISTIC CURVES (HER201G THRU HER207G)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

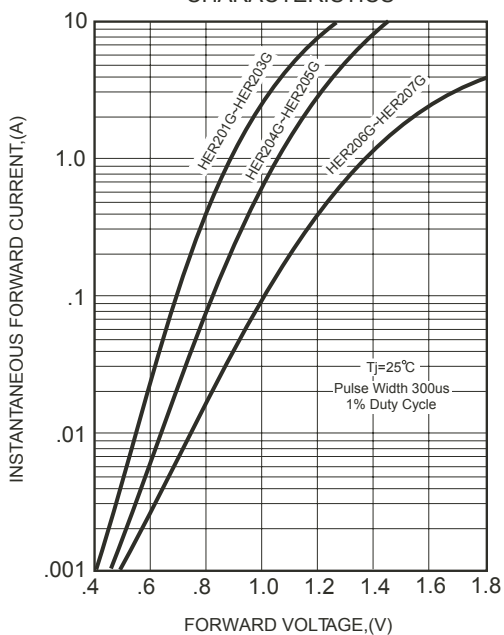


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE


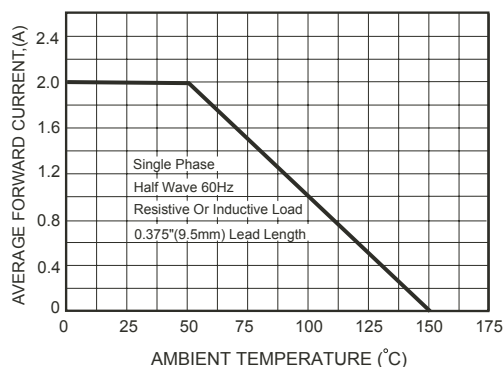


FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

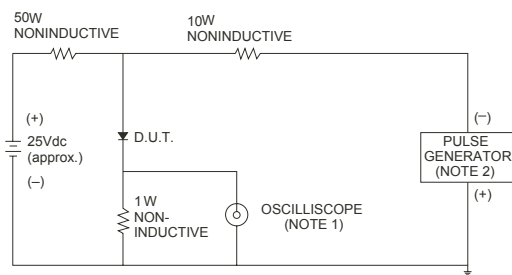

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm.22pF.
2. Rise Time= 10ns max., Source Impedance= 50 ohms.

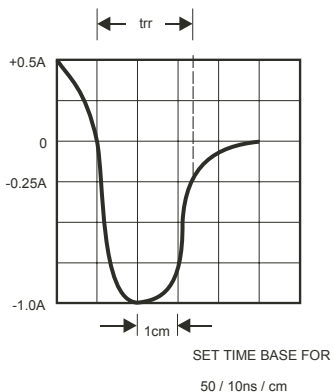


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

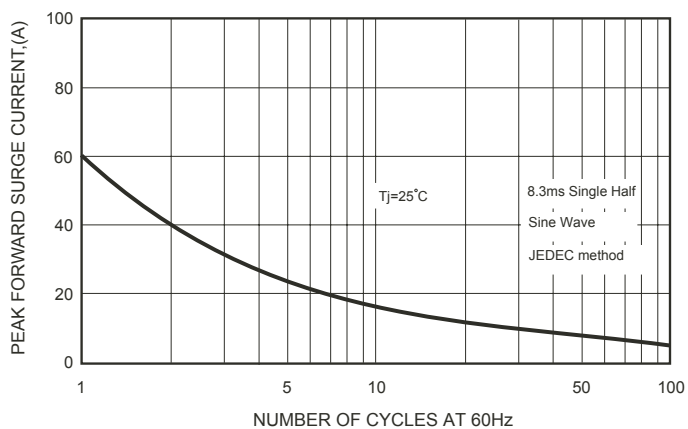


FIG.5-TYPICAL JUNCTION CAPACITANCE

