



2010/04/14 01:41:35 CAROL, TRIBBLE

DRAWING FOR REFERENCE: This is subject to change without notice


APPLICABLE STANDARD						
RATING	OPERATING TEMPERATURE RANGE	-25 °C TO +85 °C	STORAGE TEMPERATURE RANGE	-10 °C TO +60 °C		
	VOLTAGE	AC 100 V , DC 140 V				
	CURRENT	5 A	APPLICABLE CABLE			
<b>SPECIFICATIONS</b>						
ITEM		TEST METHOD		REQUIREMENTS		
<b>CONSTRUCTION</b>						
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.		ACCORDING TO DRAWING.		
MARKING		CONFIRMED VISUALLY.				
<b>ELECTRIC CHARACTERISTICS</b>						
CONTACT RESISTANCE		CONTACT SHALL BE MEASURED AT DC 1 A		5 mΩ MAX.		
INSULATION RESISTANCE		100 V DC.		1000 MΩ MIN.		
VOLTAGE PROOF		300 V AC. FOR 1 min.		NO FLASHOVER OR BREAKDOWN.		
<b>MECHANICAL CHARACTERISTICS</b>						
CONTACT INSERTION AND WITHDRAWAL FORCES		φ0.991 <sup>+0.003</sup> <sub>0</sub> BY STEEL GAUGE.		INSERTION AND WITHDRAWAL FORCES : 0.2 N MIN.		
CONNECTOR INSERTION AND WITHDRAWAL FORCES		MEASURED BY APPLICABLE CONNECTOR.		INSERTION AND WITHDRAWAL FORCES LOCKING DEVICE WITH UNLOCK : — N MAX. LOCKING DEVICE WITH LOCK : 30 N MAX.		
MECHANICAL OPERATION		1000 TIMES INSERTIONS AND EXTRACTIONS.		CONTACT RESISTANCE: 10 mΩ MAX.		
VIBRATION		FREQUENCY: 10 → 55 → 10 (Hz) (1CYC,5min), SINGLE AMPLITUDE 0.75 mm, AT 10 CYC, FOR 3 DIRECTIONS.		① NO ELECTRICAL DISCONTINUITY OF 10 μs. ② NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.		
SHOCK		490 m/s <sup>2</sup> DIRECTIONS OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.		① NO ELECTRICAL DISCONTINUITY OF 10 μs. ② NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.		
<b>ENVIRONMENTAL CHARACTERISTICS</b>						
DAMP HEAT (STEADY STATE)		EXPOSED AT 40 °C, 90 TO 95 %, 96 h.		① INSULATION RESISTANCE: 10 MΩ MIN (AT HIGH HUMIDITY). ② INSULATION RESISTANCE: 100 MΩ MIN (AT DRY). ③ NO DAMAGE, CRACK AND LOOSENESS OF PARTS.		
RAPID CHANGE OF TEMPERATURE		TEMPERATURE -55→ R/T <sup>(1)</sup> → +85 → R/T °C TIME 30 → 10 TO 15 → 30 → 10 TO 15 min UNDER 5 CYCLES.		① INSULATION RESISTANCE: 100 MΩ MIN. ② NO DAMAGE, CRACK AND LOOSENESS OF PARTS.		
CORROSION SALT MIST		EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.		NO HEAVY CORROSION RUIN THE FUNCTION.		
DRY HEAT		EXPOSED AT + 85 °C , 96 h.		NO DAMAGE, CRACK AND LOOSENESS OF PARTS.		
COLD		EXPOSED AT - 55 °C , 96 h.		NO DAMAGE, CRACK AND LOOSENESS OF PARTS.		
RESISTANCE TO SOLDERING HEAT		SOLDER TEMPERATURE +380±10°C, FOR IMMERSION DURATION, 3 s.		NO DEFORMATION OF CASE OF EXCESSIVE LOOSENESS OF THE TERMINALS		
SOLDERABILITY		SOLDERED AT SOLDER TEMPERATURE, +350±10°C FOR IMMERSION DURATION, 2 TO 3 s		SOLDER SURFACE TO BE FREE FROM PIN-HOLE, NO WETTING AND OTHER DEFECTS.		
SEALING		EXPOSED AT A DEPTH OF 1 m FOR 0.5 h.		NO WATER PENETRATION INSIDE CONNECTOR.		
AIRTIGHTNESS		APPLY AIR PRESSURE 17.6kPa FOR 0.5min TO INSIDE CONNECTOR.		NO AIR BUBBLES INSIDE CONNECTOR.		
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE	
①						
REMARK				APPROVED	SU. OBARA	09.11.09
NOTES(1)R/T : ROOM TEMPERATURE				CHECKED	HY. KISHI	09.11.09
(2)SEALING AND AIRTIGHTNESS SHALL BE TESTED BY APPLICABLE CONNECTOR.				DESIGNED	TY. SUZUKI	09.11.06
Unless otherwise specified, refer to JIS C 5402.				DRAWN	TY. SUZUKI	09.11.06
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELC4-116599-00	
<b>HRS</b>	SPECIFICATION SHEET		PART NO.	HR30-6PB-3S		
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL130-0034-2-00	△ 1/1	

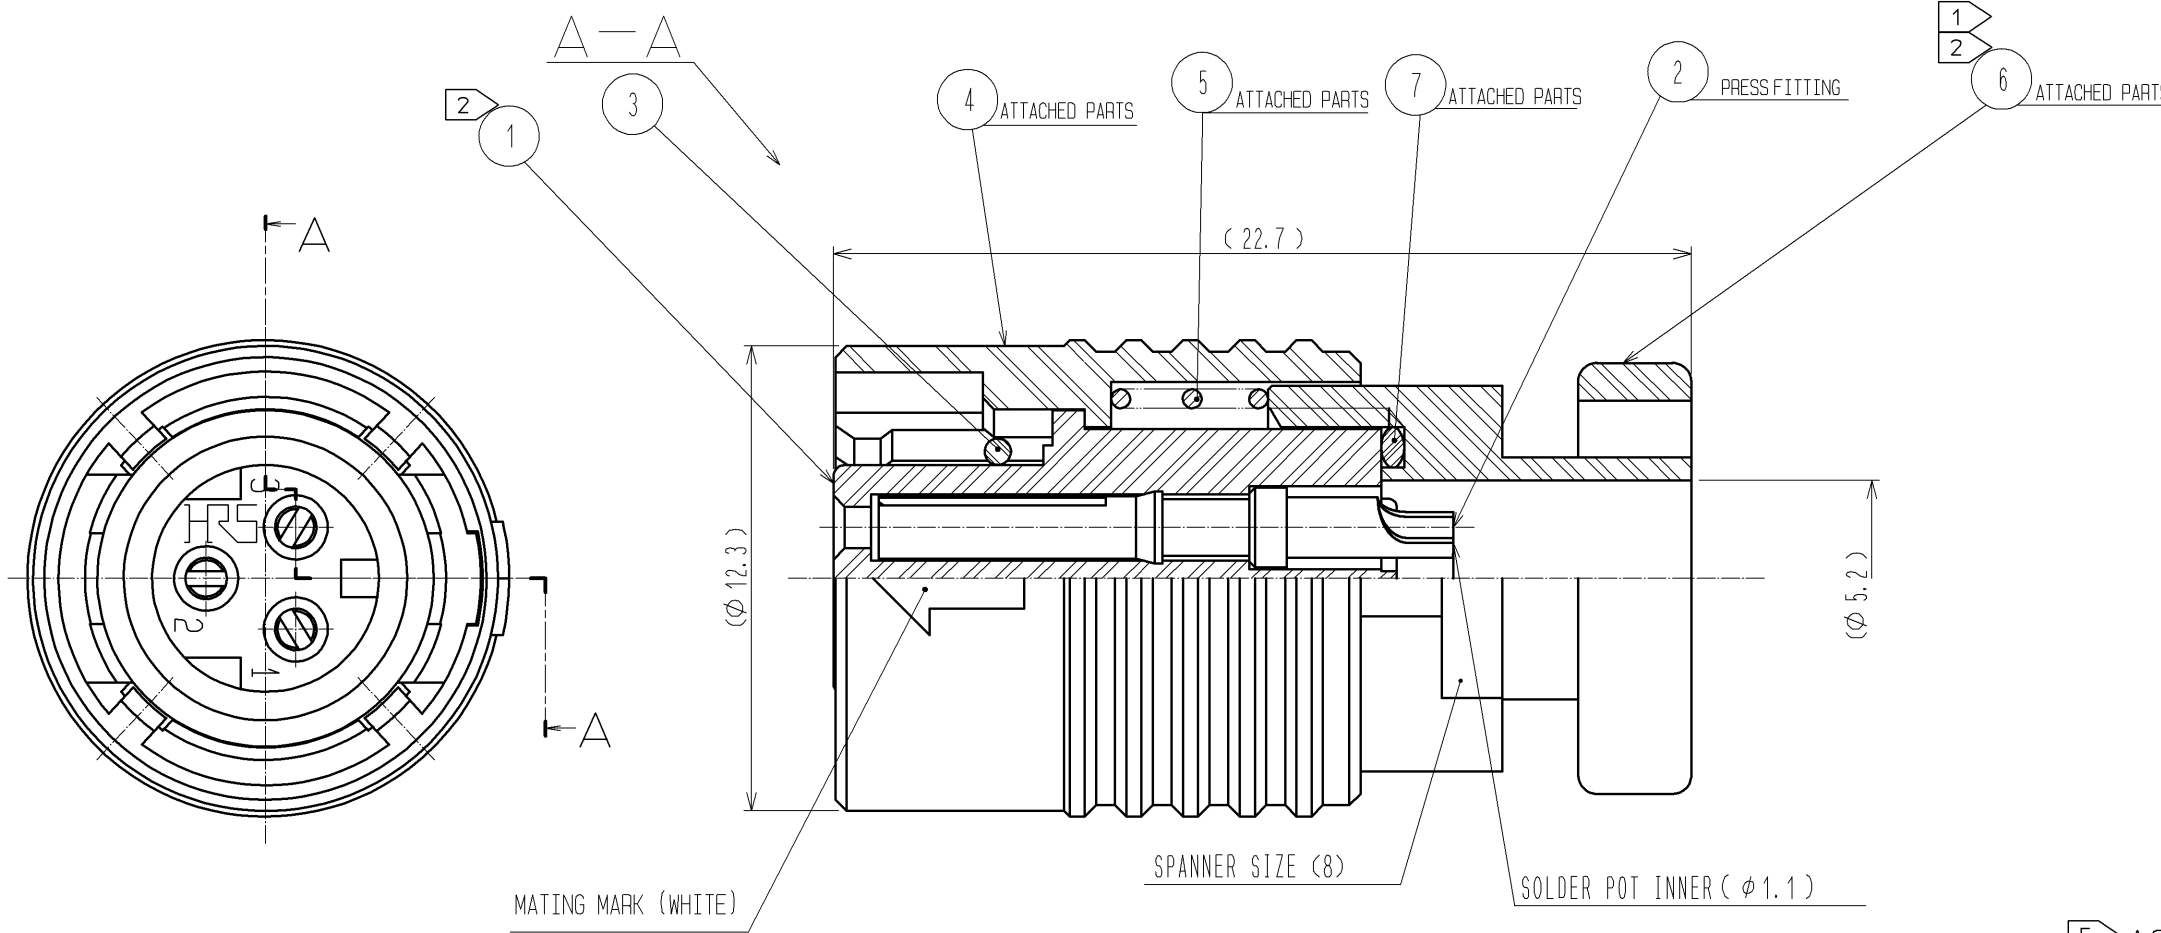

5 ASSEMBLY PROCEDURE (2:1)

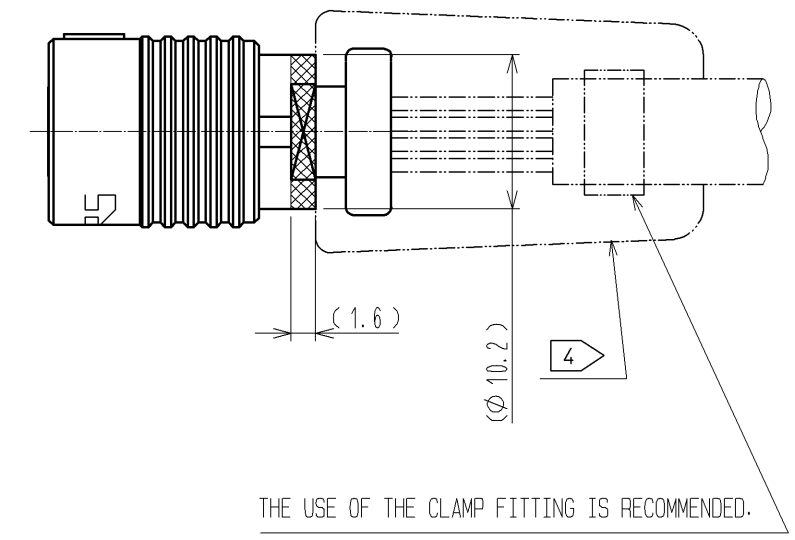

- NOTES
- 1 THE RECOMMENDED CLUMP TORQUE OF REF. NO. 6 IS 0.5N·m. LOCTITE 271, LOCPRIMER 7649, HENKEL JAPAN LTD IS RECOMMENDED TO PREVENT REF. NO. 6 FROM LOOSENING.
  - 2 ROTATION EXAMPLES OF NO. 1 AND NO. 6 ARE SHOWN. FOR OVERMOLDING NOTE THAT THE POSITION IS NOT ALWAYS THE SAME.
  - 3 APPLICABLE JIG  
SOLDER TERMINATION FIXTURE : HR30-6P-3S-TC01(CL150-0220-1)
  - 4 WHEN THIS PRODUCT ASSEMBLED, IT SHALL APPLY TO ETAD-C0198 AND BE OVERMOLDED BY CUSTOMER.  
CABLE CLAMP STRENGTH, WATERPROOF PERFORMANCE DEPEND ON OVERMOLD. WE RECOMMENDED CHECKING THE QUALITY BEFORE THE USAGE.
  - 5 THE MOLDING DIE FOR OVERMOLDING SHALL BE DESIGNED AS HOLDING DOWN THE AREA (SPANNER SETTING AREA(8) AND CIRCUMFERENCE OF (φ10.2)) AS SHOWN IN THE DRAWING.

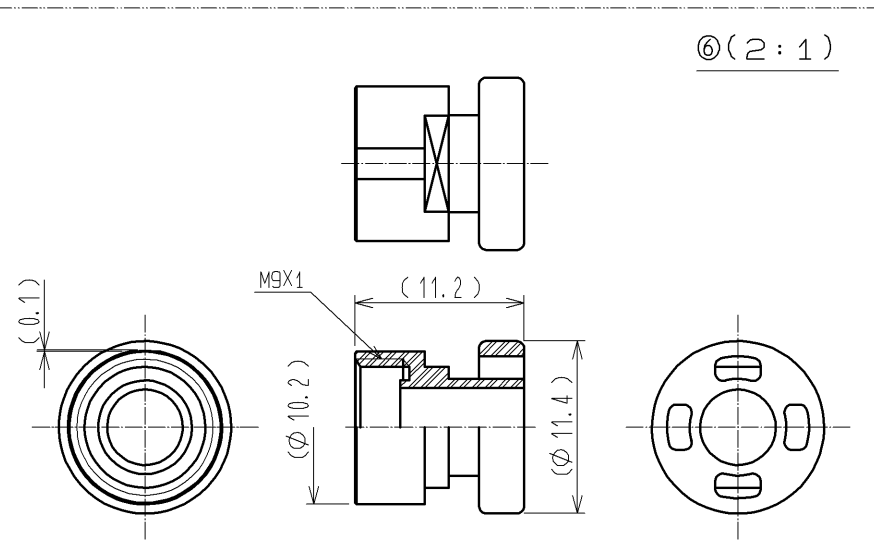

4	POLYBUTYLENE TEREPHTHALATE	(BLACK) UL94V-0					
3	SILICONE RUBBER	(RED)	7	SILICONE RUBBER	(RED)		
2	PHOSPHOR BRONZE	SURFACE PLATING : GOLD PLATING 0.2μm min UNDER PLATING : NICKEL PLATING 2μm min	6	POLYBUTYLENE TEREPHTHALATE	(BLACK) UL94V-0		
1	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	5	STAINLESS STEEL			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 5 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : SU. OBARA	09.11.09	DRAWING NO.	EDC3-116599-00		
		CHECKED : HY. KISHI	09.11.09	PART NO.	HR30-6PB-3S		
		DESIGNED : TY. SUZUKI	09.11.06	CODE NO.	CL130-0034-2-00		
		DRAWN : TY. SUZUKI	09.11.06		1/1		