

**FEATURES**

- ✧ For surface mounted application
- ✧ Easy pick and place
- ✧ Metal to silicon rectifier, majority carrier conduction
- ✧ Low power loss, high efficiency
- ✧ High current capability, low VF
- ✧ High surge current capability
- ✧ Plastic material used carriers Underwriters Laboratory Classification 94V-0
- ✧ Epitaxial construction
- ✧ High temperature soldering guaranteed: 260°C/10s at terminals
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode

MECHANICAL DATA

Case: Molded plastic


Terminal: Pure tin plated, lead free

Polarity: Indicated by cathode band

Packaging: 12mm tape per EIA STD RS-481

Weight: 0.093 gram

DO-214AA(SMB)

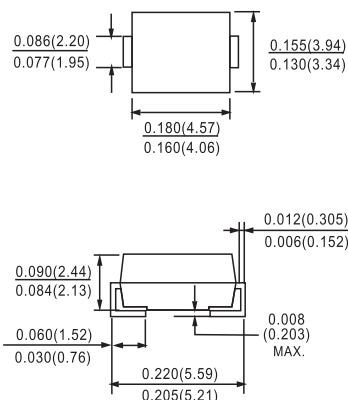**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	SSH210	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	V
Maximum RMS Voltage	V_{RMS}	70	V
Maximum DC Blocking Voltage	V_{DC}	100	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	2.0	A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	50	A
Maximum Instantaneous Forward Voltage (Note 1) IF=2 A @ $T_A=25^{\circ}C$ IF=2 A @ $T_A=125^{\circ}C$	V_F	0.79 0.65	V
Maximum Reverse Current @ Rated VR $T_A=25^{\circ}C$ $T_A=125^{\circ}C$	I_R	1	uA
		1	mA
Typical Junction Capacitance (Note 2)	C_j	70	pF
Typical Thermal Resistance	$R_{\theta JL}$	25	$^{\circ}C/W$
Operating Temperature Range	T_J	- 65 to + 175	$^{\circ}C$
Storage Temperature Range	T_{STG}	- 65 to + 175	$^{\circ}C$

Note 1: Pulse Test with PW=300u sec, 1% Duty Cycle

Note 2: Measured at 1MHz and Applied Reverse Voltage of 4.0V D.C.

RATINGS AND CHARACTERISTIC CURVES SSH210

FIG.1 FORWARD CURRENT DERATING CURVE

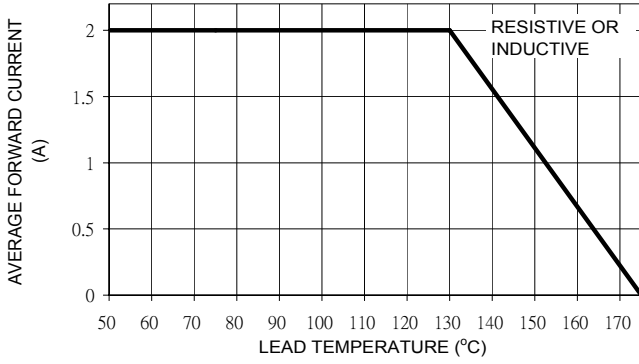


FIG. 2 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

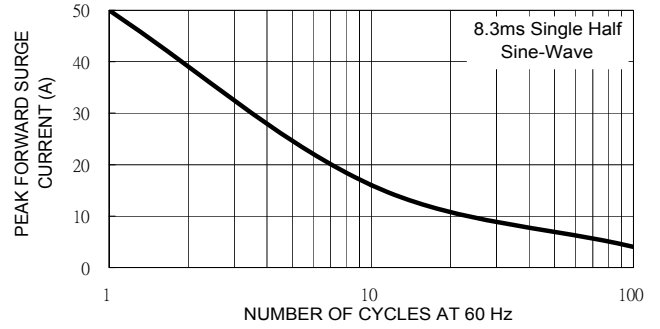


FIG. 3 TYPICAL FORWARD CHARACTERISTICS

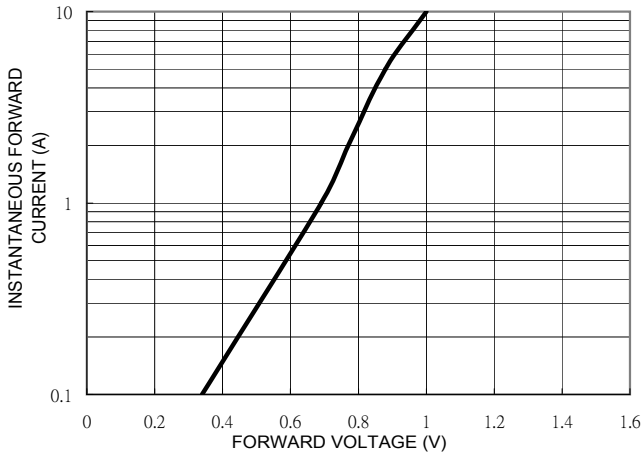


FIG. 4 TYPICAL REVERSE CHARACTERISTICS

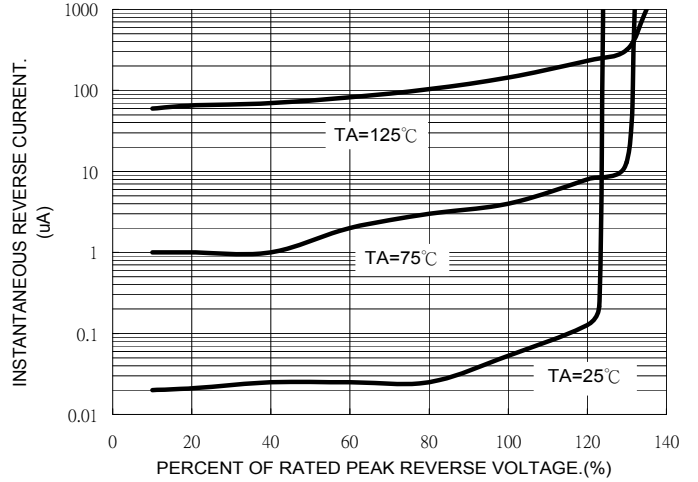


FIG. 5 TYPICAL JUNCTION CAPACITANCE

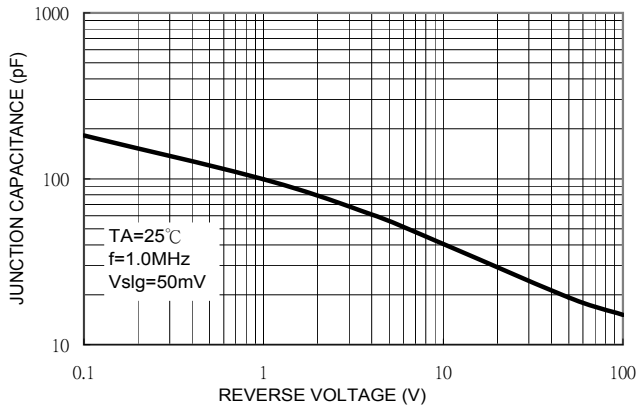


FIG. 6 TYPICAL TRANSIENT THERMAL IMPEDANCE

