



SAW Components

CELL/GPS/(K-PCS,PCS,WCDMA) Triplexer

Series/type:	B9102
Ordering code:	B39162B9102J810
Date:	November 27, 2009
Version:	2.3




Data Sheet

**Application**


- Low loss LTCC Triplexer for mobile phones covering Cellular, GPS and K-PCS/PCS band
- Usable passbands 70 MHz (CELL), 2 MHz (GPS), 120 MHz (K-PCS), 140 MHz (PCS), 60 MHz (WCDMA)
- Very low insertion attenuation in CELL, GPS and PCS/K-PCS/WCDMA band
- Very low amplitude ripple in all bands
- Integrated low loss GPS filter with single ended output 50 Ω
- No switches and control lines required
- Shunt inductor from ANT pin to ground used for ESD protection and matching

**Features**

- Package size 2.5 x 2.0 x 1.2 mm³
- Package code DCT6C
- RoHS compatible
- Approximate weight 0.021 g
- Package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- **Electrostatic Sensitive Device (ESD)**

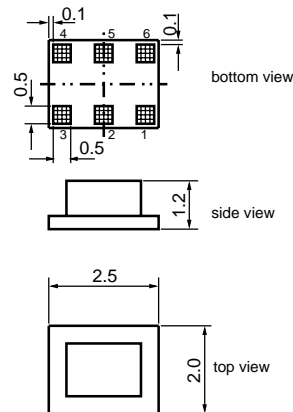**Pin configuration**

- 1 GPS Output
- 3 ANT Input
- 4 CELL Output
- 6 PCS/K-PCS/WCDMA Output
- 2,5 Ground

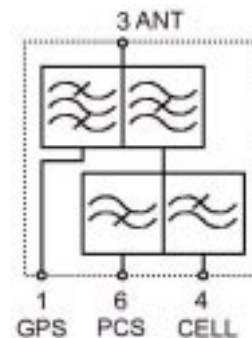



SAW Components

B9102

CELL/GPS/(K-PCS,PCS,WCDMA) Triplexer 859 / 1575.42 / 1810 / 1920 / 2140 MHz

Data Sheet



Characteristics

Temperature range for specification: T = -30 °C to +85 °C
 Terminating source impedance: Z_S = 50 Ω || 6.8 nH (ANT)
 Terminating load impedance: Z_L = 50 Ω (CELL, GPS, PCS/K-PCS/WCDMA)

		B9102			
		min.	typ. @ 25 °C	max.	
ANT - CELL					
Center frequency	f _C	—	859.0	—	MHz
Maximum insertion attenuation	α _{max}	—	0.65	0.9	dB
824.0 ... 894.0 MHz					
VSWR					
(ANT port)	824.0 ... 894.0 MHz	—	1.35	1.7	
(CELL port)	824.0 ... 894.0 MHz	—	1.25	1.7	
ANT - K-PCS					
Center frequency	f _C	—	1810.0	—	MHz
Maximum insertion attenuation	α _{max}	—	0.75	1.0	dB
1750.0 ... 1870.0 MHz					
VSWR					
(ANT port)	1750.0 ... 1870.0 MHz	—	1.25	1.6	
(K-PCS port)	1750.0 ... 1870.0 MHz	—	1.25	1.6	
ANT - PCS					
Center frequency	f _C	—	1920.0	—	MHz
Maximum insertion attenuation	α _{max}	—	0.65	0.9	dB
1850.0 ... 1990.0 MHz					
VSWR					
(ANT port)	1850.0 ... 1990.0 MHz	—	1.25	1.6	
(PCS port)	1850.0 ... 1990.0 MHz	—	1.2	1.6	
ANT - WCDMA (Band 1 Rx)					
Center frequency	f _C	—	2140.0	—	MHz
Maximum insertion attenuation	α _{max}	—	1.3	1.6	dB
2110.0 ... 2170.0 MHz					
VSWR					
(ANT port)	2110.0 ... 2170.0 MHz	—	2.0	2.3	
(WCDMA port)	2110.0...2170.0 MHz	—	1.7	2.0	



SAW Components

B9102

CELL/GPS/(K-PCS,PCS,WCDMA) Triplexer 859 / 1575.42 / 1810 / 1920 / 2140 MHz

Data Sheet



						B9102			
						min.	typ. @ 25 °C	max.	
ANT - GPS									
Center frequency	f_C					—	1575.42	—	MHz
Maximum insertion attenuation	α_{max}								
1574.42 ... 1576.42 MHz						—	1.1	1.8	dB
VSWR									
(ANT port)		1574.42	...	1576.42	MHz	—	1.2	1.8	
(GPS port)		1574.42	...	1576.42	MHz	—	1.25	1.8	
Attenuation									
	α								
10.0 ... 824.0 MHz						32	45	—	dB
824.0 ... 849.0 MHz						32	44	—	dB
849.0 ... 1495.0 MHz						30	36	—	dB
1495.0 ... 1515.0 MHz						25	37	—	dB
1515.0 ... 1535.0 MHz						10	25	—	dB
1610.0 ... 1635.0 MHz						10	25	—	dB
1635.0 ... 1710.0 MHz						25	35	—	dB
1710.0 ... 1750.0 MHz						25	37	—	dB
1750.0 ... 1850.0 MHz						32	39	—	dB
1850.0 ... 1910.0 MHz						32	42	—	dB
1910.0 ... 1980.0 MHz						32	42	—	dB
1980.0 ... 2170.0 MHz						25	34	—	dB
2170.0 ... 2700.0 MHz						15	22	—	dB
2700.0 ... 3500.0 MHz						8	15	—	dB
3500.0 ... 6000.0 MHz						4	7	—	dB
CELL - GPS									
Attenuation									
	α								
1574.42 ... 1576.42 MHz						20	34	—	dB
824.0 ... 849.0 MHz						42	46	—	dB
K-PCS - GPS									
Attenuation									
	α								
1574.42 ... 1576.42 MHz						12	22	—	dB
1750.0 ... 1870.0 MHz						35	38	—	dB
PCS - GPS									
Attenuation									
	α								
1574.42 ... 1576.42 MHz						12	22	—	dB
1850.0 ... 1910.0 MHz						38	44	—	dB

Please read *cautions and warnings and important notes* at the end of this document.



Maximum ratings

Operable temperature range	T	-30/+85	°C	
Storage temperature range	T _{stg}	-40/+85	°C	
DC voltage	V _{DC}	5	V	at GPS port
ESD voltage	V _{ESD}	50 ¹⁾	V	machine model, 10 pulses
Input power at				source and load impedance 50 Ω
CELL port				effective power in the on-state
824 ... 849 MHz	P _{IN}	31	dBm	continuous wave signal
PCS/K-PCS port				
1750 ... 1910 MHz	P _{IN}	31	dBm	

¹⁾ acc. to JESD22-A115A (machine model), 10 negative & 10 positive pulses.



SAW Components


B9102

CELL/GPS/(K-PCS,PCS,WCDMA) Triplexer 859 / 1575.42 / 1810 / 1920 / 2140 MHz


Data Sheet



ANT - CELL (transfer function, PCB loss deembedded):

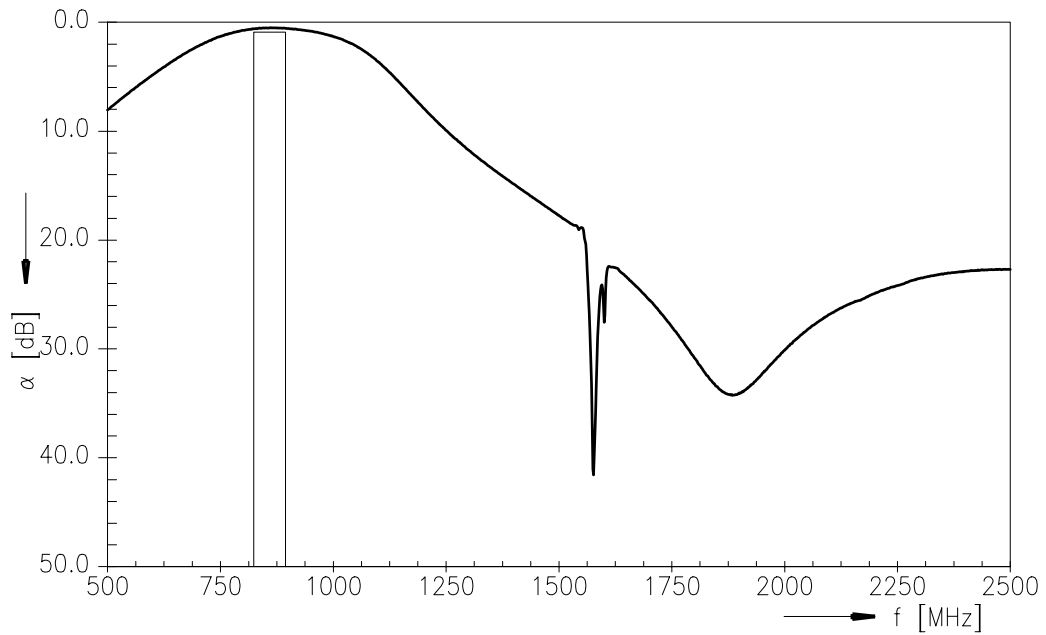

ANT - PCS/K-PCS/WCDMA (Band 1 Rx) (transfer function, PCB loss deembedded):

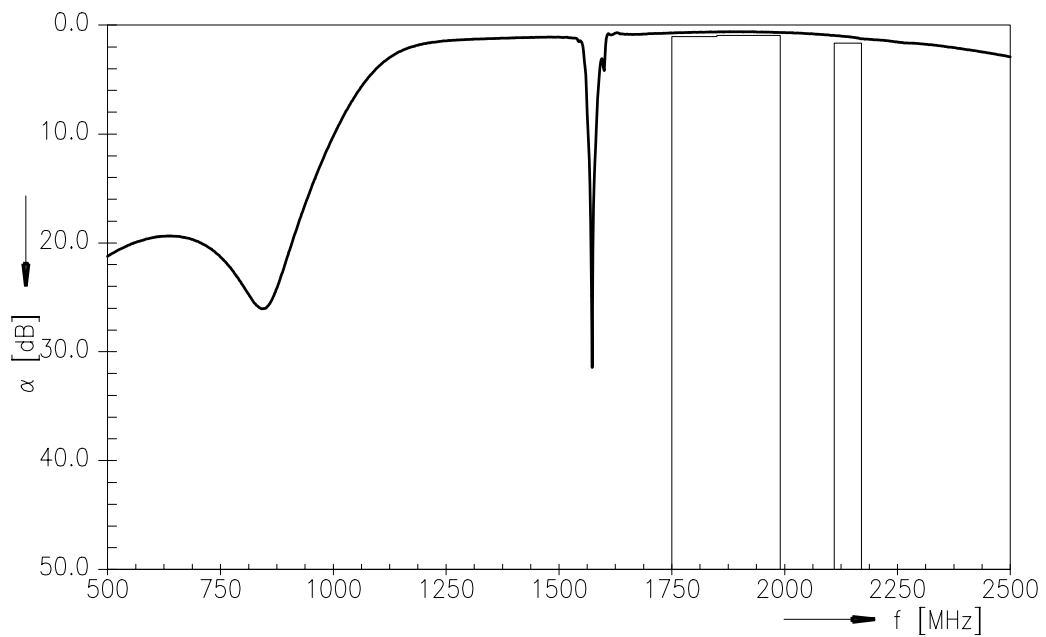

Please read *cautions and warnings and important notes* at the end of this document.



SAW Components


B9102

CELL/GPS/(K-PCS,PCS,WCDMA) Triplexer 859 / 1575.42 / 1810 / 1920 / 2140 MHz


Data Sheet



ANT - GPS (transfer function, PCB loss deembedded):

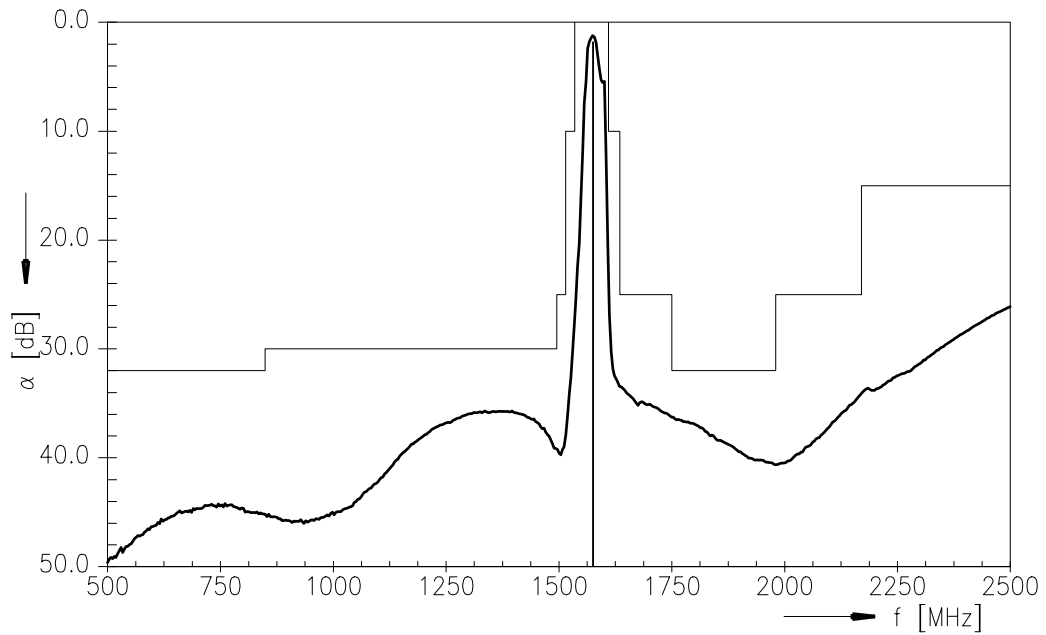

ANT - GPS (transfer function wide band, PCB loss deembedded):

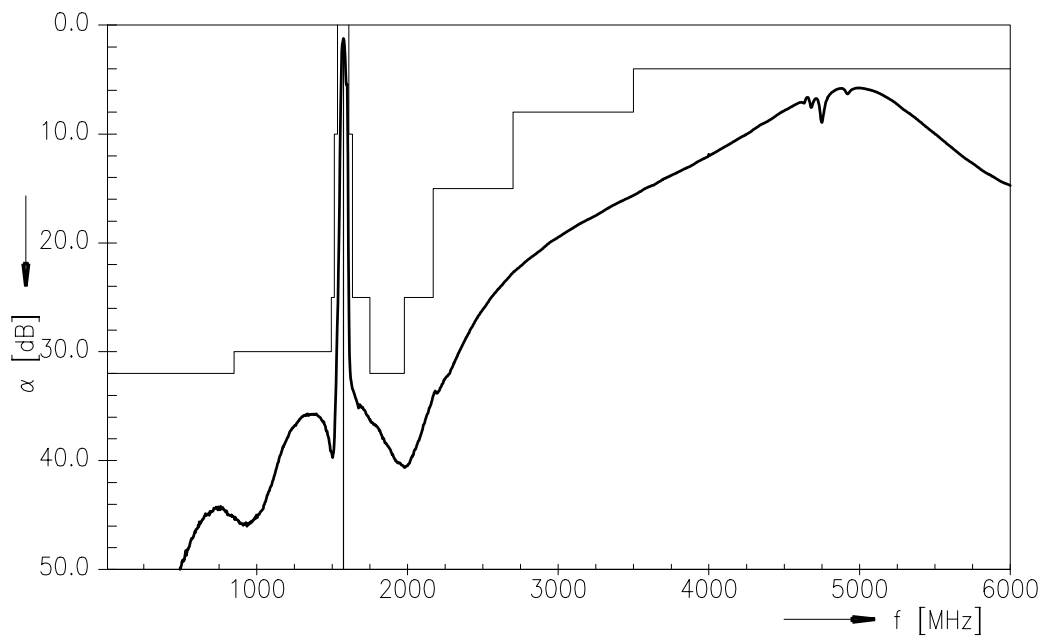

Please read *cautions and warnings* and *important notes* at the end of this document.



SAW Components


B9102

CELL/GPS/(K-PCS,PCS,WCDMA) Triplexer 859 / 1575.42 / 1810 / 1920 / 2140 MHz


Data Sheet



CELL - GPS (transfer function, PCB loss deembedded):

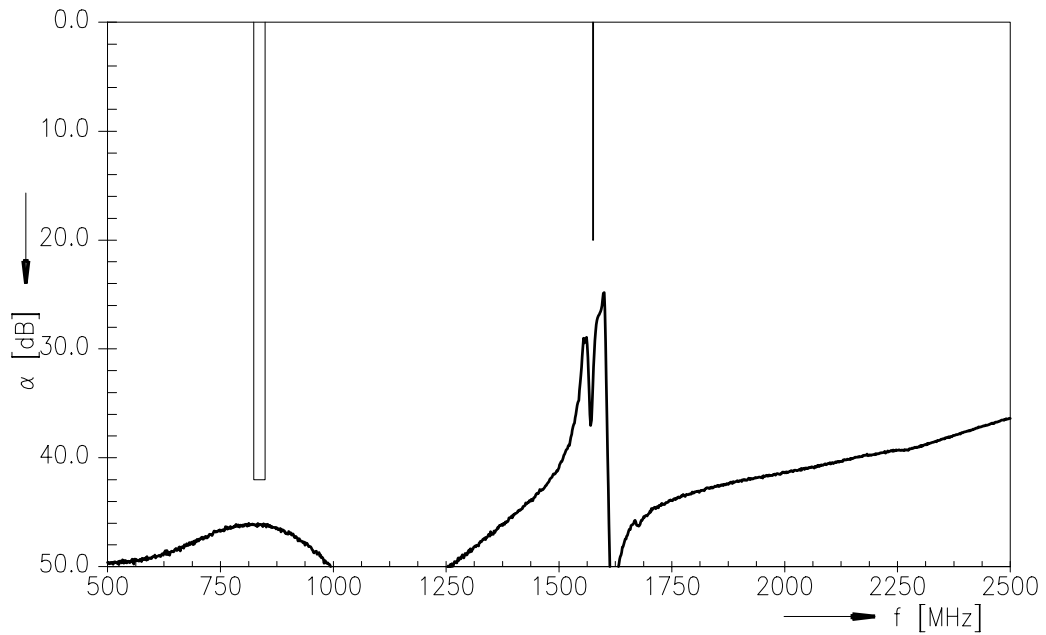

PCS/K-PCS - GPS (transfer function, PCB loss deembedded):

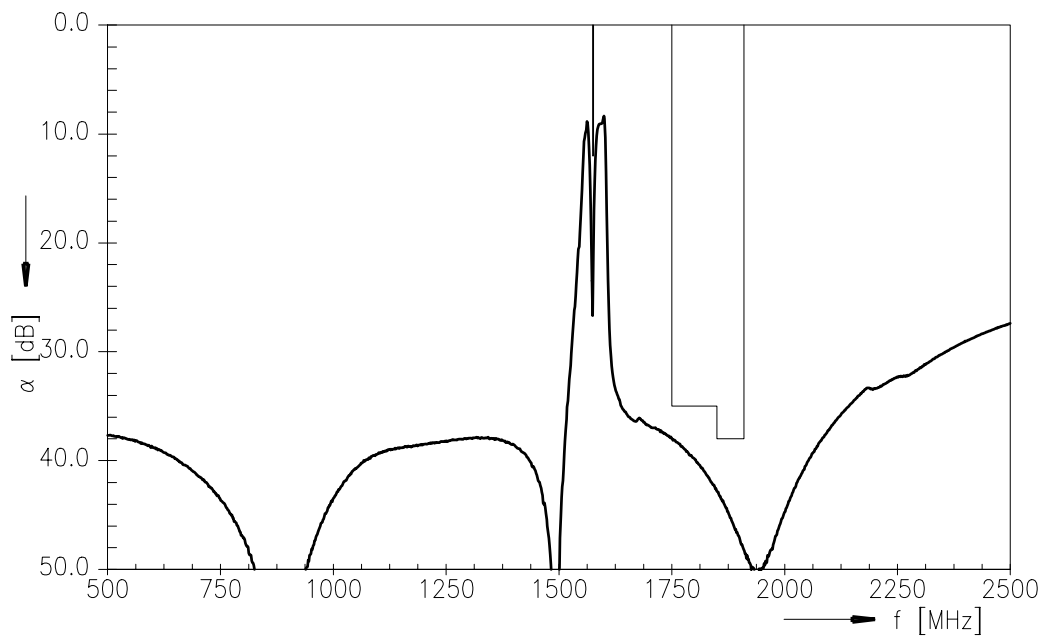

Please read *cautions and warnings and important notes* at the end of this document.



SAW Components

B9102



CELL/GPS/(K-PCS,PCS,WCDMA) Triplexer 859 / 1575.42 / 1810 / 1920 / 2140 MHz

Data Sheet





Smith charts / VSWR

S_{11} GPS

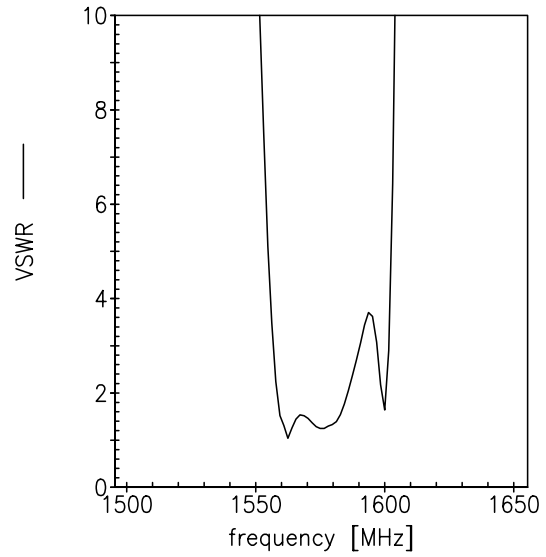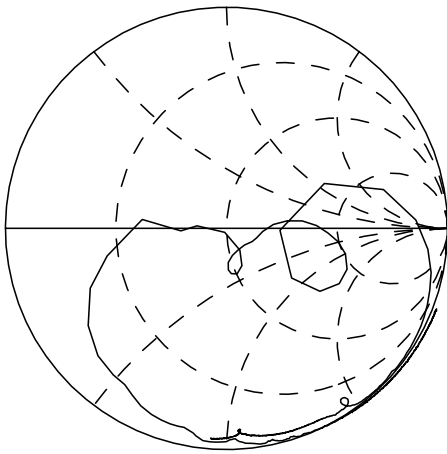

S_{22} ANT

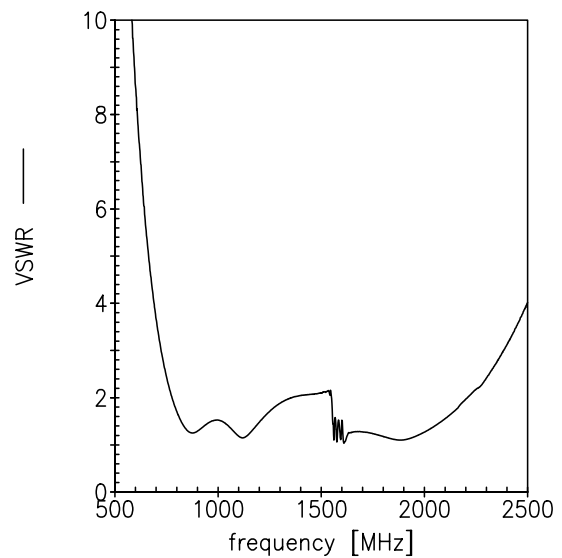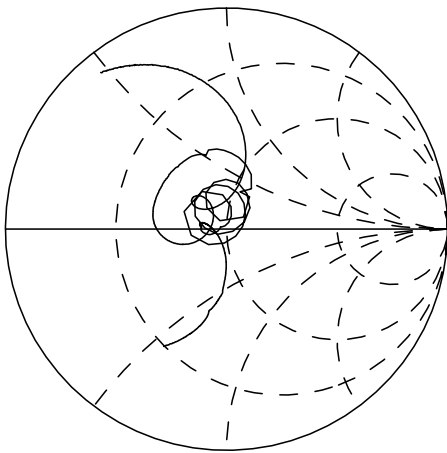

Please read *cautions and warnings and important notes* at the end of this document.



SAW Components

B9102



CELL/GPS/(K-PCS,PCS,WCDMA) Triplexer 859 / 1575.42 / 1810 / 1920 / 2140 MHz

Data Sheet





Smith charts / VSWR

S₃₃ CELL

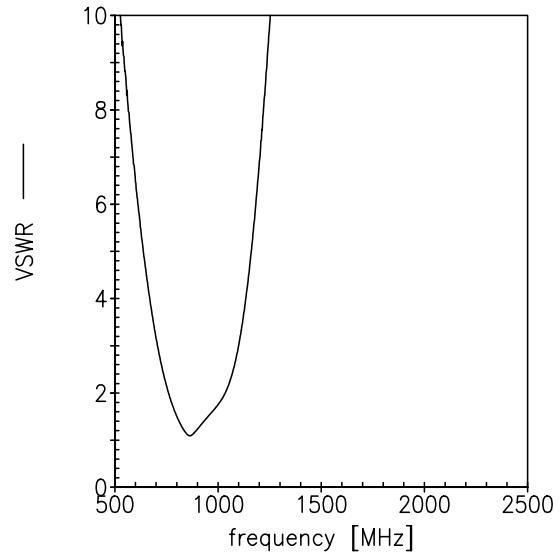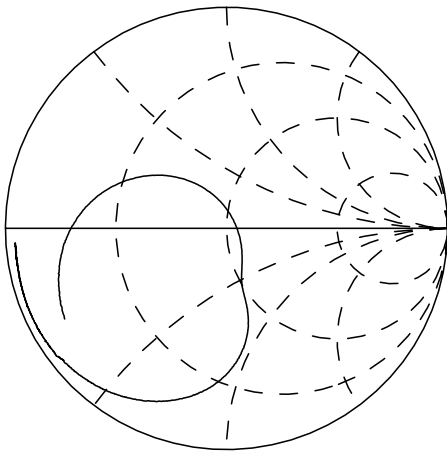

S₄₄ PCS/K-PCS

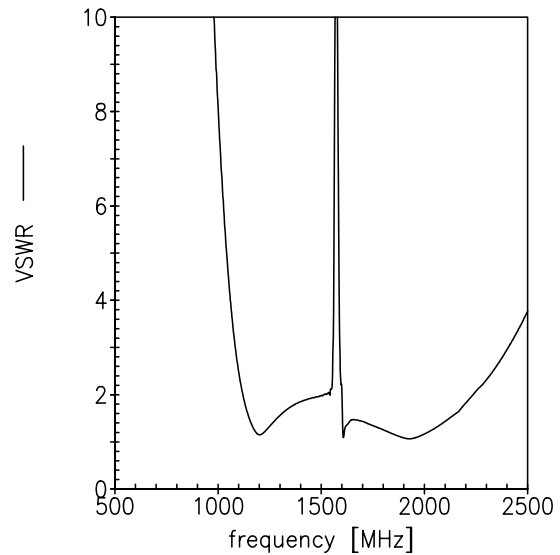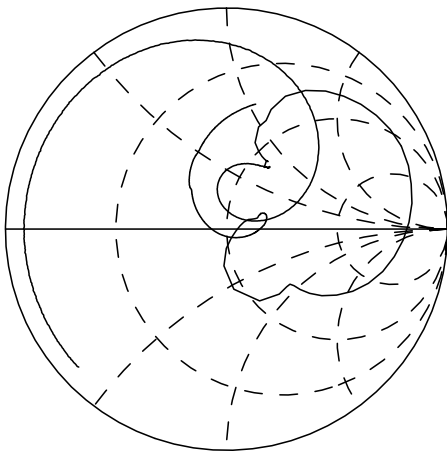

Please read *cautions and warnings and important notes* at the end of this document.



SAW Components

B9102

CELL/GPS/(K-PCS,PCS,WCDMA) Triplexer 859 / 1575.42 / 1810 / 1920 / 2140 MHz

Data Sheet



References

Type	B9102
Ordering code	B39162B9102J810
Marking and package	C61157-A3-A36
Packaging	F61074-V8225-Z000
Date codes	L_1126
S-parameters	B9102_NB.s4p
Soldering profile	S_6001
RoHS compatible	defined as compatible with the following documents: "DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. 2005/618/EC from April 18th, 2005, amending Directive 2002/95/EC of the European Parliament and of the Council for the purposes of establishing the maximum concentration values for certain hazardous substances in electrical and electronic equipment."
Moldability	Before using in overmolding environment, please contact your EPCOS sales office.

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com.

Published by EPCOS AG
Surface Acoustic Wave Components Division
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2009. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Please read *cautions and warnings and important notes* at the end of this document.



Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CSMP, CSSP, CTVS, DeltaCap, DSSP, MiniBlue, MiniCell, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.