



**POWER MATE
TECHNOLOGY CO.,LTD.**

FKC05(W) SERIES



FEATURES

- 5 WATTS OUTPUT POWER
- OUTPUT CURRENT UP TO 1000mA
- STANDARD 1.25 X 0.80 X 0.40 INCH
- HIGH EFFICIENCY UP TO 84%
- 2:1 AND 4:1 WIDE INPUT VOLTAGE RANGE
- FIVE-SIDED SHIELD
- FIXED SWITCHING FREQUENCY
- STANDARD 24 PIN DIP PACKAGE & SMD TYPE PACKAGE
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Measurement Equipment
Semiconductor Equipment

OPTIONS

SMD TYPE, M1 TYPE, M2 TYPE

DESCRIPTION

The FKC05 series offer 5 watts of output power from a package in an IC compatible 24pin DIP configuration without derating to 71°C ambient temperature and pin to pin compatible with FKC03 series. FKC05 series have 2:1 wide input voltage of 9-18, 18-36 and 36-75VDC. FKC05-W series have 4:1 ultra wide input voltage of 9-36 and 18-75VDC.

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS		
Output power	5 Watts, max.	
Voltage accuracy	Full load and nominal Vin	± 1%
Minimum load		0%
Line regulation	LL to HL at Full Load	± 0.2%
Load regulation	No Load to Full Load	Single ± 0.5% Dual ± 1%
Cross regulation(Dual)	Asymmetrical load 25% / 100% FL	± 5%
Ripple and noise	20MHz bandwidth	See table
Temperature coefficient		±0.02% / °C, max.
Transient response recovery time	25% load step change	200µS
Over load protection	% of FL at nominal input	170%, typ.
Short circuit protection		Continuous, automatics recovery

GENERAL SPECIFICATIONS

Efficiency	See table	
Isolation voltage	Input to Output Input (Output) to Case DIP SMD	1600VDC, min. 1600VDC, min. 1000VDC, min.
Isolation resistance		10 ⁹ ohms, min.
Isolation capacitance		300pF, max.
Switching frequency		300KHz, typ.
Approvals and standard	IEC60950-1, UL60950-1, EN60950-1	
Case material		Nickel-coated copper
Base material		Non-conductive black plastic
Potting material		Epoxy (UL94-V0)
Dimensions		1.25 X 0.80 X 0.40 Inch (31.8 X 20.3 X 10.2 mm)
Weight	DIP SMD	16g (0.55oz) 18g (0.62oz)
MTBF (Note 1)	BELLCORE TR-NWT-000332 MIL-HDBK-217F	3.165 x 10 ⁶ hrs 1.631 x 10 ⁶ hrs

INPUT SPECIFICATIONS

FKC05	12V nominal input	9 – 18VDC
	24V nominal input	18 – 36VDC
Input voltage range	48V nominal input	36 – 75VDC
FKC05-W	24V nominal input	9 – 36VDC
	48V nominal input	18 – 75VDC

Input filter	Pi type
	12V input
Input surge voltage 100mS max	24V input 48V input
	36VDC 50VDC 100VDC

Input reflected ripple current	Nominal Vin and full load	20mA p-p
Start up time	Nominal Vin and constant resistive load	Power up 450mS, max.

ENVIRONMENTAL SPECIFICATIONS

Operating ambient temperature	Standard M1 (Note 6) M2 (W series)	-25°C~+85°C (with derating) -40°C~+85°C (non-derating) -40°C~+85°C (with derating)
Maximum case temperature	Standard M1	+100°C +105°C

Storage temperature range	-55°C ~ +105°C
Thermal impedance	Nature convection 20°C/watt

Thermal shock	MIL-STD-810F
Vibration	MIL-STD-810F

Relative humidity	5% to 95% RH
-------------------	--------------

EMC CHARACTERISTICS

EMI	EN55022	Class A
ESD	EN61000-4-2	Air ± 8KV Contact ± 6KV
Radiated immunity	EN61000-4-3	10 V/m
Fast transient (Note 7)	EN61000-4-4	± 2KV
Surge (Note 7)	EN61000-4-5	± 1KV
Conducted immunity	EN61000-4-6	10 Vr.m.s
		Perf. Criteria A
		Perf. Criteria A
		Perf. Criteria A
		Perf. Criteria B
		Perf. Criteria B
		Perf. Criteria B






**POWER MATE
TECHNOLOGY CO., LTD.**

5 WATTS DC-DC CONVERTER

Model Number	Input Range	Output Voltage	Output Current		Output ⁽⁴⁾ Ripple & Noise	Input Current		Eff ⁽⁴⁾ (%)	Capacitor ⁽⁵⁾ Load max
			Min. load	Full load		No load ⁽³⁾	Full load ⁽²⁾		
FKC05-12S33	9 – 18 VDC	3.3 VDC	0mA	1000mA	50mVp-p	10mA	382mA	76	2200µF
FKC05-12S05	9 – 18 VDC	5 VDC	0mA	1000mA	50mVp-p	10mA	563mA	78	1000µF
FKC05-12S12	9 – 18 VDC	12 VDC	0mA	470mA	50mVp-p	10mA	603mA	82	220µF
FKC05-12S15	9 – 18 VDC	15 VDC	0mA	400mA	50mVp-p	10mA	649mA	81	150µF
FKC05-12D05	9 – 18 VDC	± 5 VDC	0mA	± 500mA	50mVp-p	15mA	563mA	78	± 680µF
FKC05-12D12	9 – 18 VDC	± 12 VDC	0mA	± 230mA	50mVp-p	20mA	597mA	81	± 100µF
FKC05-12D15	9 – 18 VDC	± 15 VDC	0mA	± 190mA	50mVp-p	15mA	594mA	84	± 68µF
FKC05-24S33 (W)	18 – 36 (9 – 36) VDC	3.3 VDC	0mA	1000mA	50mVp-p	10mA(5mA)	194mA (191mA)	75 (76)	2200µF
FKC05-24S05 (W)	18 – 36 (9 – 36) VDC	5 VDC	0mA	1000mA	50mVp-p	15mA(10mA)	285mA (278mA)	77 (79)	1000µF
FKC05-24S12 (W)	18 – 36 (9 – 36) VDC	12 VDC	0mA	470mA	50mVp-p	15mA(5mA)	305mA (305mA)	81 (81)	220µF
FKC05-24S15 (W)	18 – 36 (9 – 36) VDC	15 VDC	0mA	400mA	50mVp-p	15mA(10mA)	325mA (312mA)	81 (84)	150µF
FKC05-24D05 (W)	18 – 36 (9 – 36) VDC	± 5 VDC	0mA	± 500mA	50mVp-p	15mA(10mA)	274mA (282mA)	80 (78)	± 680µF
FKC05-24D12 (W)	18 – 36 (9 – 36) VDC	± 12 VDC	0mA	± 230mA	50mVp-p	20mA(10mA)	288mA (295mA)	84 (82)	± 100µF
FKC05-24D15 (W)	18 – 36 (9 – 36) VDC	± 15 VDC	0mA	± 190mA	50mVp-p	20mA(10mA)	308mA (297mA)	81 (84)	± 68µF
FKC05-48S33 (W)	36 – 75 (18 – 75) VDC	3.3 VDC	0mA	1000mA	50mVp-p	10mA(5mA)	98mA (100mA)	74 (73)	2200µF
FKC05-48S05 (W)	36 – 75 (18 – 75) VDC	5 VDC	0mA	1000mA	50mVp-p	10mA(10mA)	143mA (138mA)	77 (79)	1000µF
FKC05-48S12 (W)	36 – 75 (18 – 75) VDC	12 VDC	0mA	470mA	50mVp-p	10mA(10mA)	151mA (155mA)	82 (80)	220µF
FKC05-48S15 (W)	36 – 75 (18 – 75) VDC	15 VDC	0mA	400mA	50mVp-p	10mA(10mA)	162mA (160mA)	81 (82)	150µF
FKC05-48D05 (W)	36 – 75 (18 – 75) VDC	± 5 VDC	0mA	± 500mA	50mVp-p	10mA(10mA)	141mA (145mA)	78 (76)	± 680µF
FKC05-48D12 (W)	36 – 75 (18 – 75) VDC	± 12 VDC	0mA	± 230mA	50mVp-p	5mA(10mA)	147mA (151mA)	82 (80)	± 100µF
FKC05-48D15 (W)	36 – 75 (18 – 75) VDC	± 15 VDC	0mA	± 190mA	50mVp-p	10mA(10mA)	150mA (156mA)	83 (80)	± 68µF

Note





1. BELLCORE TR-NWT-000332. Case 1 : 50% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment).
2. Maximum value at nominal input voltage and full load of standard type.
3. Typical value at nominal input voltage and no load.
4. Typical value at nominal input voltage and full load.
5. Test by minimum Vin and constant resistive load.
6. M1 version is more efficient, therefore, it can be operated in a more extensive temperature range than standard and M2 version.
7. An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220µF/100V, ESR 48mΩ
8. There is no pin at PIN10 & PIN15 for FKC05-W series.

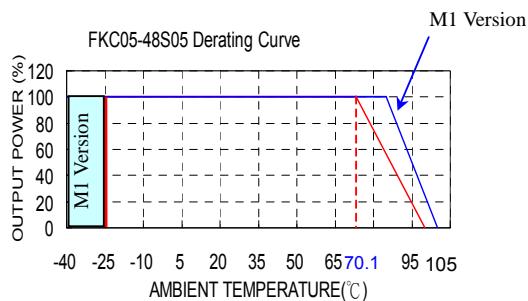



**POWER MATE
TECHNOLOGY CO., LTD.**

5 WATTS DC-DC CONVERTER

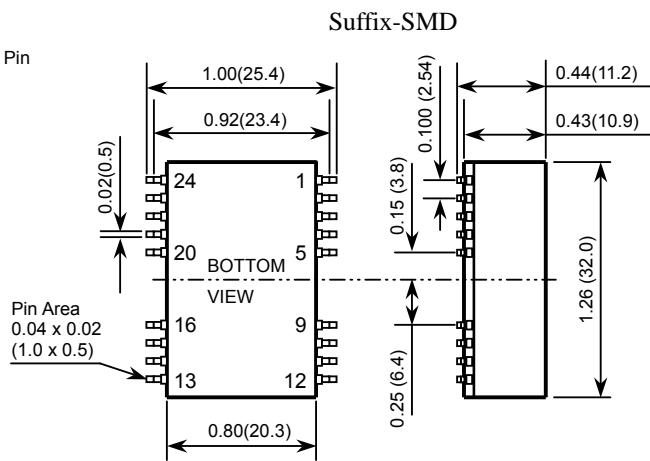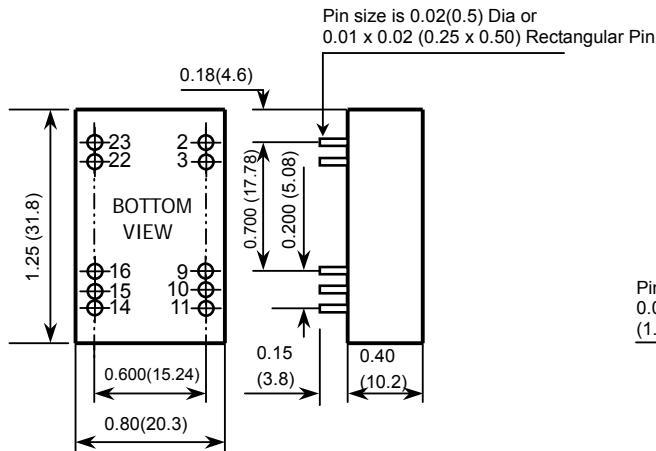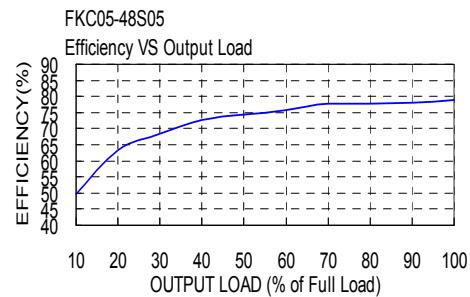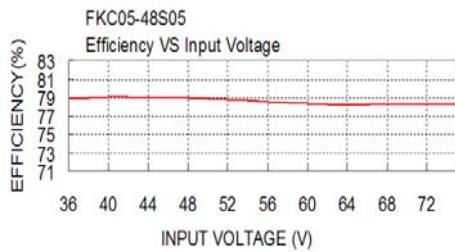

- All dimensions in Inches (mm)
Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
- Pin pitch tolerance ±0.01(0.25)
- Pin dimension tolerance ±0.004 (0.1)

DIP PIN CONNECTION					
PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
2	- INPUT	- INPUT	23	+ INPUT	+ INPUT
3	- INPUT	- INPUT	22	+ INPUT	+ INPUT
9	NC	COMMON	16	- OUTPUT	COMMON
10	NC(Note 8)	NC(Note 8)	15	NC(Note 8)	NC(Note 8)
11	NC	- OUTPUT	14	+ OUTPUT	+ OUTPUT

SMD PIN CONNECTION					
PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
2	- INPUT	- INPUT	23	+ INPUT	+ INPUT
3	- INPUT	- INPUT	22	+ INPUT	+ INPUT
9	NC	COMMON	16	- OUTPUT	COMMON
10	NC	NC	15	NC	NC
11	NC	- OUTPUT	14	+ OUTPUT	+ OUTPUT
Others	NC	NC	Others	NC	NC

