
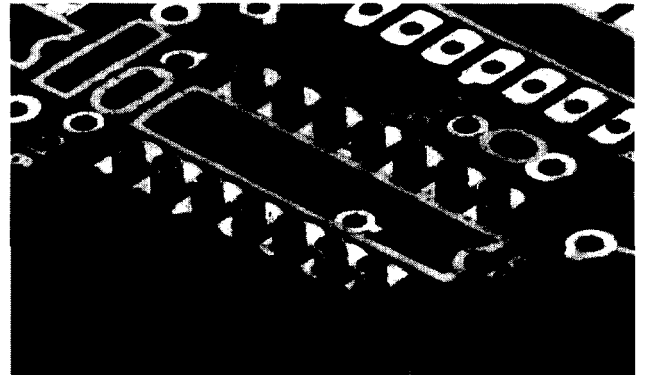


Peel-A-Way® DIP Socket Terminal Carriers

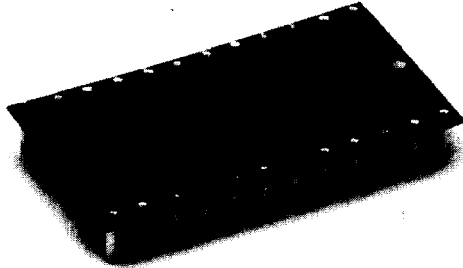

Features:

- Peel away terminal carrier after soldering.
- Disposable carrier.
- Complete soldering visibility on both sides of PCB.
- Footprint to customer requirement.
- Maximum air flow.
- Better flux rinse.
- No contact damage due to terminal carrier insertion.
- No contact pull out due to extraction of terminal carrier.

Terminals and Contacts:

Terminal: Brass - Copper Alloy 360, ASTM-B-16

Contact: Beryllium Copper - Copper Alloy 172, ASTM-B-194

Plating:

Terminal: Tin-Lead over Nickel

Contact: Gold over Nickel

Gold per MIL-G-45204

Tin-Lead per MIL-P-81728



Nickel per QQ-N-290

Standard High Temperature Sockets

KS - Insulator Material:


Polyimide Film

Temperature range -269°C to 400°C (-452°F to 752°F)

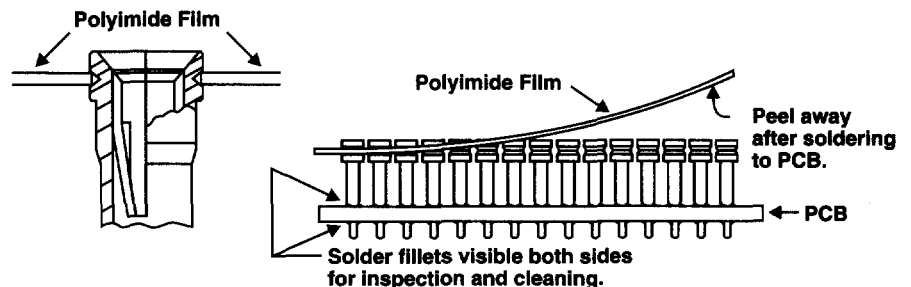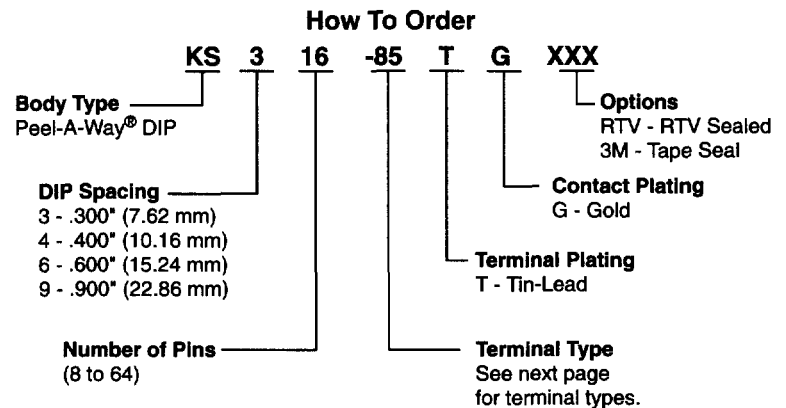

How To Use:



1. Place socket in PCB.
2. Send PCB and socket through soldering operation.
3. Peel away polyimide film carrier.



Peel-A-Way® DIP Socket Terminal Carriers


Dimensional Information

# of Pins	A	B	C
8	.300 (7.62)	.400 (10.16)	.400 (10.16)
10	.300 (7.62)	.400 (10.16)	.500 (12.70)
12	.300 (7.62)	.400 (10.16)	.600 (15.24)
14	.300 (7.62)	.400 (10.16)	.700 (17.78)
16	.300 (7.62)	.400 (10.16)	.800 (20.32)
18	.300 (7.62)	.400 (10.16)	.900 (22.86)
20	.300 (7.62)	.400 (10.16)	1.000 (25.40)
22	.300 (7.62)	.400 (10.16)	1.100 (27.94)
24	.300 (7.62)	.400 (10.16)	1.200 (30.48)
28	.300 (7.62)	.400 (10.16)	1.400 (35.56)
40	.300 (7.62)	.400 (10.16)	2.000 (50.80)
16	.400 (10.16)	.500 (12.70)	.800 (20.32)
20	.400 (10.16)	.500 (12.70)	1.000 (25.40)
22	.400 (10.16)	.500 (12.70)	1.100 (27.94)
24	.400 (10.16)	.500 (12.70)	1.200 (30.48)
28	.400 (10.16)	.500 (12.70)	1.400 (35.56)
32	.400 (10.16)	.500 (12.70)	1.600 (40.64)
10	.600 (15.24)	.700 (17.78)	.500 (12.70)
18	.600 (15.24)	.700 (17.78)	.900 (22.86)
20	.600 (15.24)	.700 (17.78)	1.000 (25.40)
22	.600 (15.24)	.700 (17.78)	1.100 (27.94)
24	.600 (15.24)	.700 (17.78)	1.200 (30.48)
28	.600 (15.24)	.700 (17.78)	1.400 (35.56)
32	.600 (15.24)	.700 (17.78)	1.600 (40.64)
36	.600 (15.24)	.700 (17.78)	1.800 (45.72)
40	.600 (15.24)	.700 (17.78)	2.000 (50.80)
42	.600 (15.24)	.700 (17.78)	2.100 (53.34)
48	.600 (15.24)	.700 (17.78)	2.400 (60.96)
64	.600 (15.24)	.700 (17.78)	3.200 (81.28)
32	.900 (22.86)	1.000 (25.40)	1.600 (40.64)
36	.900 (22.86)	1.000 (25.40)	1.800 (45.72)
40	.900 (22.86)	1.000 (25.40)	2.000 (50.80)
52	.900 (22.86)	1.000 (25.40)	2.600 (66.04)
56	.900 (22.86)	1.000 (25.40)	2.800 (71.12)
64	.900 (22.86)	1.000 (25.40)	3.200 (81.28)

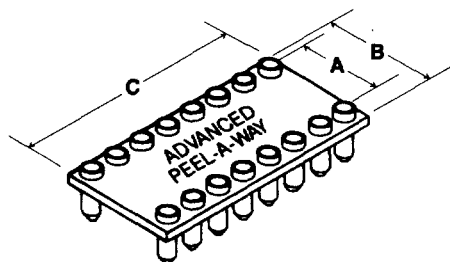


Terminal Information


Low Profile Solder Tail Type -33




Low Profile Solder Tail Type -51




Super Low Profile Type -04




Ultra Low Profile Type -49




Near Flush Solder Tail Type -85



Near Flush Solder Tail Type -176



Near Flush Solder Tail Type -210




Quick turn delivery available on standard terminal types.
Additional terminal types available.


Socket Options



RTV Sealed - Pg. 27



Tape Sealed - Pg. 27



Solder Preform - Pg. 26