



LGE—CR7SA4800—2006

SPECIFICATION OF PRODUCTS

CUSTOMER : _____

PRODUCT NAME: CRYSTAL UNITS

PART NUMBER : SMD 48.000M

SHENZHEN LUGUANG ELECTRONIC TECHNOLOGY CO.,LTD

Add : 30c&d 7 dong ,wei peng gardan ,zhen zhong road, fu tian distinct,
shen zhen, china

TEL:+86+755-33341901 33341902 33341903

FAX:+86+755-33341906 33341908

Http://www.luguang.cn E-mail:Lge@luguang.cn

Approved by	Checked by	Drawn by



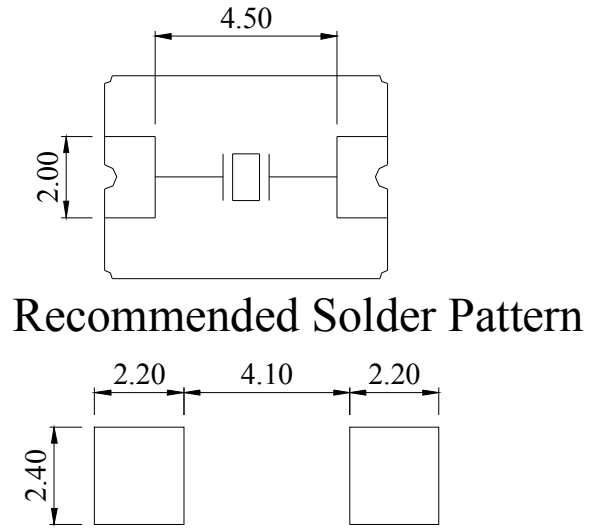
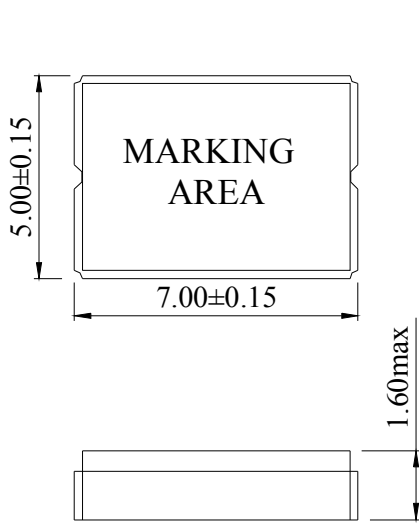

I ELECTRICAL PARAMETERS

No.	Characteristic	Limits	Remark
1	Nominal Frequency	48.000MHz	
2	Mode of Vibration	3rd Overtone	
3	Frequency Tolerance	$\pm 30\text{ppm}$	Measure at $25^{\circ}\text{C} \pm 3^{\circ}\text{C}$
4	Operating Temperature Range	$-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$	
5	Frequency Stability	$\pm 30\text{ppm}$	Over Operating Temperature Range
6	Storage Temperature Range	$-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$	
7	Load capacitance	20pF	
8	Equivalent Series Resistance	70 Ω max	
9	Drive Level	100 μ W max	
10	Insulation Resistance	500M Ω	At 100V _{DC}
11	Shunt Capacitance	7pF max	
12	Motional Capacitance		
13	Aging Per Year	$\pm 5\text{ppm}$	First Year
14	Resistance Variation vs. Drive Level		
15	Frequency Variation vs. Drive Level		
16	Package Type	HCX-7SA	See Page 4



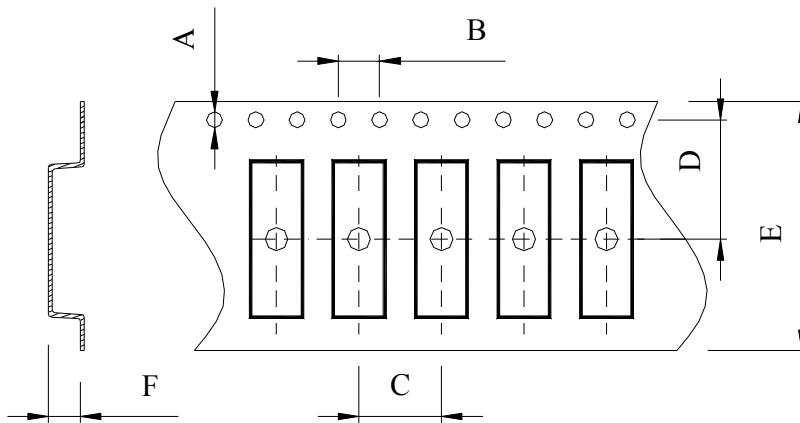
I RELIABILITY SPECIFICATIONS

No.	Test Item	Test Conditions	Reference
1	High Temperature Storage	Temperature: 125°C ±10°C Time: 1000±24 Hours	MIL-STD-883E
2	Temperature Cycle	Temperature 1: -55°C ±10°C Temperature 2: 125°C ±10°C Temperature change between T1 and T2 at soonest Run 10 cycles, maintain T1 and T2 30minutes each in one cycle	MIL-STD-883E
3	Solder Heat Resistance	Pre-heat: 125°C 60~120 Seconds Solder Temperature: 260°C ±10°C Time: 5 Seconds	MIL-STD-202F
4	Drop Test	3 Times Free Fall from 75cm height table to 3cm thickness hard wood board	MIL-STD-202F
5	High Temperature, High Humidity Storage	Temperature: 85°C Relative Humidity: 85% Time: 1000 Hours	MIL-STD-883E
6	Steam Aging	Temperature: 97°C Time: 8 Hours 230°C solder pot to check solderability	MIL-STD-883E
7	Solderability	Dip in flux 5~10 seconds Temperature: 230°C ±10°C Time: 5 Seconds	MIL-STD-883E
8	Aging	Temperature: 85°C Time: 300 Hours	MIL-STD-883E
9	Thermal Shock	Temperature 1: -55°C ±10°C Temperature 2: 125°C ±10°C Temperature change between T1 and T2: 5 seconds 10 cycles, maintain T1 and T2 for 30 minutes each in one cycle	MIL-STD-202F
10	Vibration	Frequency Range: 10Hz~1000Hz Amplitude: 1.5mm 40mins in each direction, total 120mins	MIL-STD-883E

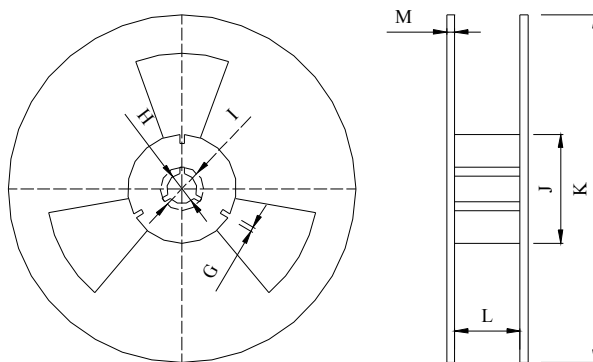
I Outline Dimensions(unit: mm)

I MARKING


Line: Frequency in MHz (6 digitals include dot)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aut	Sept	Oct	Nov	Dec
A	B	C	D	E	F	G	H	I	J	K	L

I PACKAGE
Tape Dimensions(unit :mm)


A	B	C	D	E	F
1.50	4.0	8.0	7.5	16.0	1.6

Reel Dimensions(unit: mm)


G	H	I	J	K	L	M
2.5	13.5	21.6	60.0	178	17.5	1.6

***1000pcs/Reel**