


Broadband Microwave Coaxial Noise Sources

NST04L-A

10 MHz to 4000 MHz

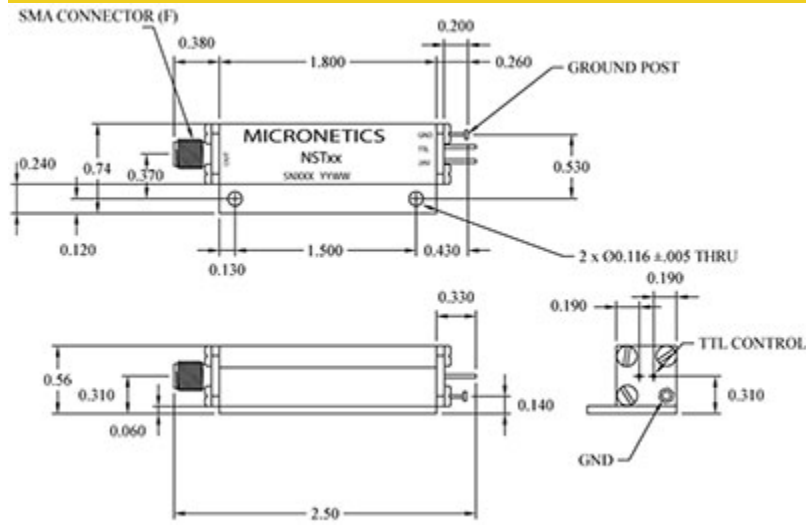

Specifications

RF Frequency	10 MHz to 4000 MHz
Noise Output	14 - 16 dB ENR
Noise Spectral Density (N_0)	-159 dBm/Hz
VSWR	1.3:1
Peak Factor	5:1
Bias Voltage	28 V
Supply Current	25 mA Max
Impedance	50 ohms

Package and Connectivity

Construction	Coaxial
Connector Type	SMA(f)

Environmental

Operating Temperature	-55 to 95 °C
Storage Temperature	-65 to 125 °C

Notes

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | www.Micronetics.com

MICRONETICS

SMA CONNECTOR (F)

