


# CLE331

## AlGaAs Point Source IRED Collimating Lens



July, 2001

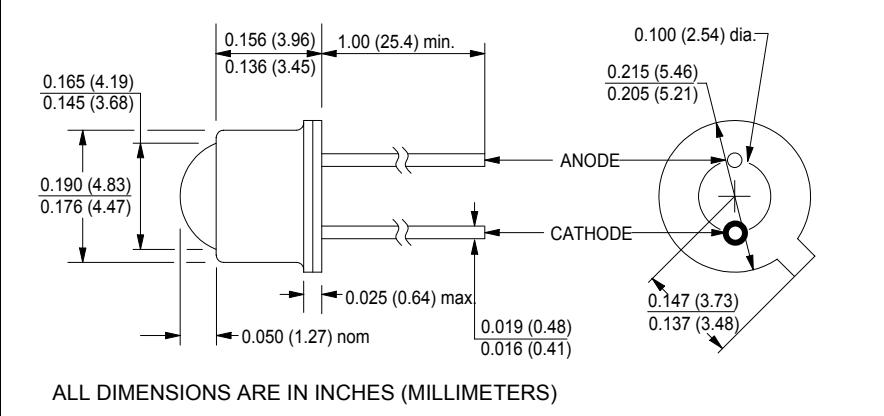

### features

- 850nm wavelength
- 50MHz operation
- TO-46 hermetic package
- $\pm 5^\circ$  beam angle
- collimating lens
- RoHS compliant

### description

The CLE331 is an advanced, high efficiency, high speed, point source, AlGaAs infrared-emitting diode intended for use in applications requiring a uniform output radiation pattern. The point source die junction is 0.002" in diameter, and the dual aspheric lens provides a highly collimated radiation source. Beam pattern is very uniform without the bond wire shadow effect of standard infrared emitting diodes.

### absolute maximum ratings ( $T_A = 25^\circ\text{C}$ unless otherwise stated)

storage temperature	.....	-65°C to +150°C
operating temperature	.....	-65°C to +125°C
lead soldering temperature <sup>(1)</sup>	.....	260°C
continuous forward current <sup>(2)</sup>	.....	100mA
peak forward current (1.0ms pulse width, 10% duty cycle)	.....	1A
reverse voltage	.....	5V
continuous power dissipation <sup>(3)</sup>	.....	200mW

### notes:

1. 0.06" (1.5mm) from the header for 5 seconds maximum
2. Derate linearly 0.80mA/°C from 25°C free air temperature to  $T_A = +125^\circ\text{C}$ .
3. Derate linearly 1.6mW/°C from 25°C free air temperature to  $T_A = +125^\circ\text{C}$ .

### electrical characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

symbol	parameter	min	typ	max	units	test conditions
P <sub>O</sub>	Total power output	2.0	3.0	-	mW	I <sub>F</sub> = 100mA
E <sub>e</sub>	Irradiance <sup>(4)</sup>	300	-	-	μW/cm <sup>2</sup>	I <sub>F</sub> = 100mA
λ <sub>P</sub>	Peak emission wavelength	-	850	-	nm	I <sub>F</sub> = 100mA
I <sub>R</sub>	Reverse current	-	-	10	μA	V <sub>R</sub> = 3.0V
V <sub>F</sub>	Forward voltage	-	-	2.2	V	I <sub>F</sub> = 100mA
θ <sub>HP</sub>	Emission angle at half power points	-	10	-	deg.	I <sub>F</sub> = 100mA
t <sub>r</sub> , t <sub>f</sub>	Output rise and fall time	-	5.0	10	ns	I <sub>F</sub> = 100mA

notes: 4. Power/unit area measured within a 0.444" (1.128cm) diameter area, centered on the mechanical axis of the device and spaced 2.54" (6.45cm) from lens side of the tab. This is geometrically equivalent to a 10° cone.