

PIN NAMES

Pin	Function
V _{CC}	Most positive power supply input.
GND	Ground
D _{IN} , /D _{IN}	These differential PECL 100K compatible inputs receive NRZ data.
/EN	This PECL 100K compatible input enables Laser Driver. Modulation current goes to zero when asserted HIGH.
OUT, /OUT	Open collector outputs from the modulation buffer drive these differential current outputs.
V _{REF}	Voltage reference for use with R _{SET} .
R _{SET}	An external resistor sets up the source current for modulation I _{MOD} .

TRUTH TABLE⁽¹⁾

D	/D	/EN	OUT ⁽²⁾	/OUT
L	H	L	H	L
H	L	L	L	H
X	X	H	H	L

NOTES:

1. L = LOW, H = HIGH, X = don't care
2. H = I_{OUT} = 0mA

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

Symbol	Rating	Value	Unit
V _{CC}	Power Supply Voltage	0 to +7.0	V
V _I	Input Voltage	0 to V _{CC}	V
I _O	Output Current	25	mA
T _A	Operating Temperature Range	-40 to +85	°C
T _{store}	Storage Temperature Range	-55 to +125	°C
P _{tot}	Power Dissipation	250	mW

NOTE:

1. Permanent device damage may occur if ABSOLUTE MAXIMUM RATINGS are exceeded. This is a stress rating only and functional operation is not implied at conditions other than those detailed in the operational sections of this data sheet. Exposure to ABSOLUTE MAXIMUM RATING conditions for extended periods may affect device reliability.

OPERATING CONDITIONS⁽¹⁾

Symbol	Rating	Value	Unit
V _{CC}	Power Supply Voltage	+4.5 to +5.5 (or) +3.0 to +3.6	V
R _{EXT}	Resistor to Dissipate Power	10 to 50	Ω
R _{SER}	Laser Diode Serial Resistor	0 to 50	Ω
R _{SET} ⁽³⁾	Resistor to Adjust Current	700 to 20,000	Ω
θ _{JA}	Thermal Resistance of Package to Ambient ⁽²⁾	113	°C/W
C _{OUT}	Capacitance on OUT + /OUT	2.5 typical	pF

NOTES:

1. The voltage drop across R_{EXT} and R_{SER} plus Laser Diode should not be greater than 1V.
2. Still air without heatsink.
3. R_{SET} minimum 430Ω.

DC ELECTRICAL CHARACTERISTICSGND = 0V; $V_{CC} = +5.0V \pm 10\%$ or $V_{CC} = +3.3V \pm 10\%$

Symbol	Parameter	$T_A = -40^\circ\text{C}$		$T_A = 0^\circ\text{C}$		$T_A = +25^\circ\text{C}$			$T_A = +85^\circ\text{C}$		Unit
		Min.	Max.	Min.	Max.	Min.	Typ.	Max.	Min.	Max.	
V_{IH}	Input HIGH Voltage (D_{IN} , $/D_{IN}$, $/EN$)	$V_{CC}-1165$	$V_{CC}-880$	$V_{CC}-1165$	$V_{CC}-880$	$V_{CC}-1165$	—	$V_{CC}-880$	$V_{CC}-1165$	$V_{CC}-880$	mV
V_{IL}	Input LOW Voltage (D_{IN} , $/D_{IN}$, $/EN$)	$V_{CC}-1810$	$V_{CC}-1475$	$V_{CC}-1810$	$V_{CC}-1475$	$V_{CC}-1810$	—	$V_{CC}-1475$	$V_{CC}-1810$	$V_{CC}-1475$	mV
V_{REF}	Reference Voltage	1.7	2.3	1.7	2.3	1.7	2.0	2.3	1.7	2.3	V
I_{IL}	Input LOW Current ⁽¹⁾ (D_{IN} , $/D_{IN}$, $/EN$)	0.5 -300	— —	0.5 -300	— —	0.5 -300	— —	— —	0.5 -300	— —	μA
I_{IH}	Input HIGH Current (D_{IN} , $/D_{IN}$, $/EN$)	—	100	—	100	—	—	100	—	100	μA
I_{CC}	Supply Current ⁽²⁾	—	25	—	25	—	—	25	—	25	mA
I_{OL}	Output LOW Current ($/EN = \text{HIGH}$)	—	1000	—	1000	—	450	1000	—	1000	μA
I_{OUT}	Modulation Current	—	30	—	30	—	—	30	—	30	mA
I_{RSET}	Modulation Control	0.125	0.625	0.125	0.625	0.125	—	0.125	0.125	0.625	mA
A_{RSET}	$=I_{OUT}/I_{RSET}$	30	44	30	44	30	38	30	30	44	—
D_J	Deterministic Jitter ⁽³⁾ (RMS)	—	—	—	—	—	7	—	—	—	ps

NOTES:

- $V_i = V_{IL}$ (Min.)
- $I_{MOD} = 25\text{mA}$.
- $I_{MOD} = 10\text{mA}$, 2.5Gbps, 2³³-1 pattern.

AC ELECTRICAL CHARACTERISTICS⁽¹⁾ $I_{MOD} = 10\text{mA}$; GND = 0V; $V_{CC} = +5V \pm 10\%$ or $V_{CC} = +3.3V \pm 10\%$

Symbol	Parameter	$T_A = -40^\circ\text{C}$			$T_A = 0^\circ\text{C}$			$T_A = +25^\circ\text{C}$			$T_A = +85^\circ\text{C}$			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
$t_{pd D}$	Propagation Delay $D_{IN} - \text{OUT}$	—	—	—	—	—	—	—	400	—	—	—	—	ps
$t_{pd EN}$	Propagation Delay $/EN - \text{OUT}$	—	—	—	—	—	—	—	400	—	—	—	—	ps
t_r t_f	Rise/Fall Time ⁽²⁾ (20% to 80%)	—	78	130	—	76	130	—	74	130	—	72	130	ps
I_{OR}	Output Current Ringing ⁽²⁾	—	—	10	—	—	10	—	—	10	—	—	10	%

NOTES:

- $R_{EXT} = R_{SER} = 25\Omega \pm 1\%$, R_{SER} connects to V_{CC} directly without Laser Diode.
- $I_{MOD} = 10\text{mA}$.
- $I_{OH} = 5$ to 25mA .

TYPICAL CHARACTERISTICS


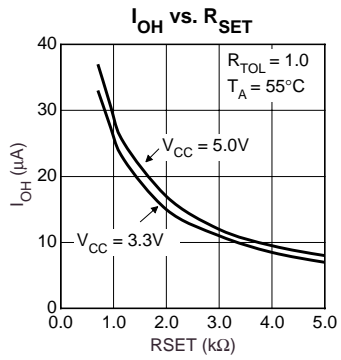


Figure 1. DC Response

PRODUCT ORDERING CODE

Ordering Code	Package Type	Operating Range
SY88922VKC	K10-1	Commercial
SY88922VKCTR	K10-1	Commercial

10 LEAD MSOP (K10-1)

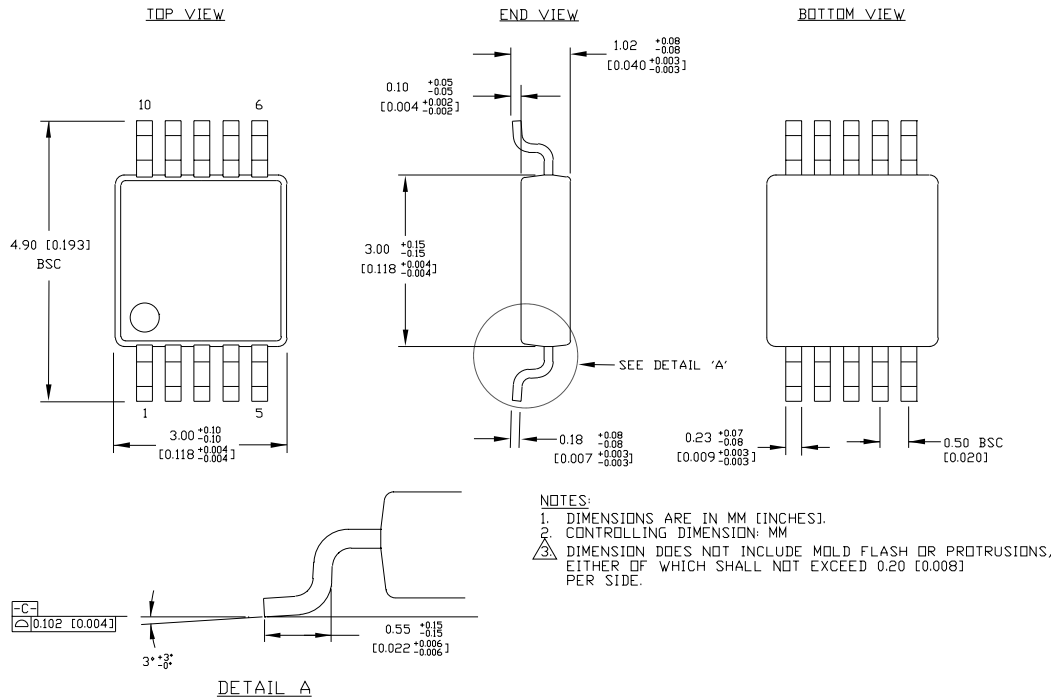

Rev. 00

MICREL-SYNERGY 3250 SCOTT BOULEVARD SANTA CLARA CA 95054 USA

TEL + 1 (408) 980-9191 FAX + 1 (408) 914-7878 WEB <http://www.synergyssemi.com> <http://www.micrel.com>

This information is believed to be accurate and reliable, however no responsibility is assumed by Micrel for its use nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent right of Micrel Inc.

© 2000 Micrel Incorporated