
Model(型號): S09K11H01





Features:(特點):

High-precision linearity is attained by high-precision printing technology.

Space-save design, contributing to reduction in the size and weight of sets.

Reduced torque load at the time of driving the motor provides a light operating force.


Operating temperatures as high as 105° c supported.(type B)

Applications(作用):

For feedback detections of various types of motor drive units.

For detection of all size.

Detecting the angle of a vehicle headlight.(type B).

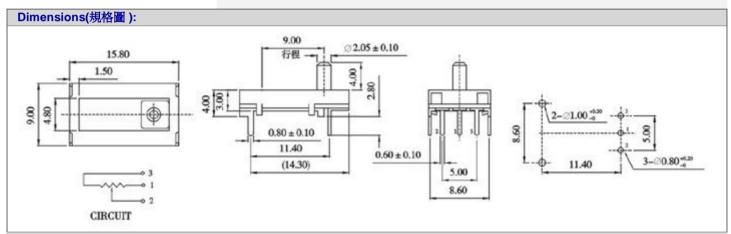

S	peci	ifica	tion	ısı	規格	
•		mou	LIVI	ıvı	וםושעי	_

- F				
Electrical Characteristics [電氣性能]				
Total resistance [全阻抗值]	$1K\Omega \sim 1M\Omega$			
Total resistance tolerance [全阻抗值容許差]	±30%			
Ratings power(w) [額定功率]	5V DC			
Resistance taper [阻抗變化特性]	В			
Residual resistance [殘留阻值]	全阻值3%Ω Max.			
Sliding noise [滑動雜音]	300mV Max			
Insulation resistance [絕緣阻抗]	100MΩ Min. at DC 250V			
Withstanding voltage [耐電壓]	1 minute at AC 250V			
Max. operating voltage [最高使用電壓]	AC 50V			
Mechanical Characteristics [机械性能]				
Operation torque [回轉力矩]	10~80gf.cm			
Rotation stopper strength [止動強度]	3Kgf.cm Min			
Switch Travel [開關移動量]	9±0.5 mm			
Endurance Characteristics [耐久性能]				
Rotational life [回轉壽命]	More than 100,000 cycles			