


2012 Size

Chip Multilayer Diplexer
for CELL / GPS

FSLF-S090JR



Shape & Size

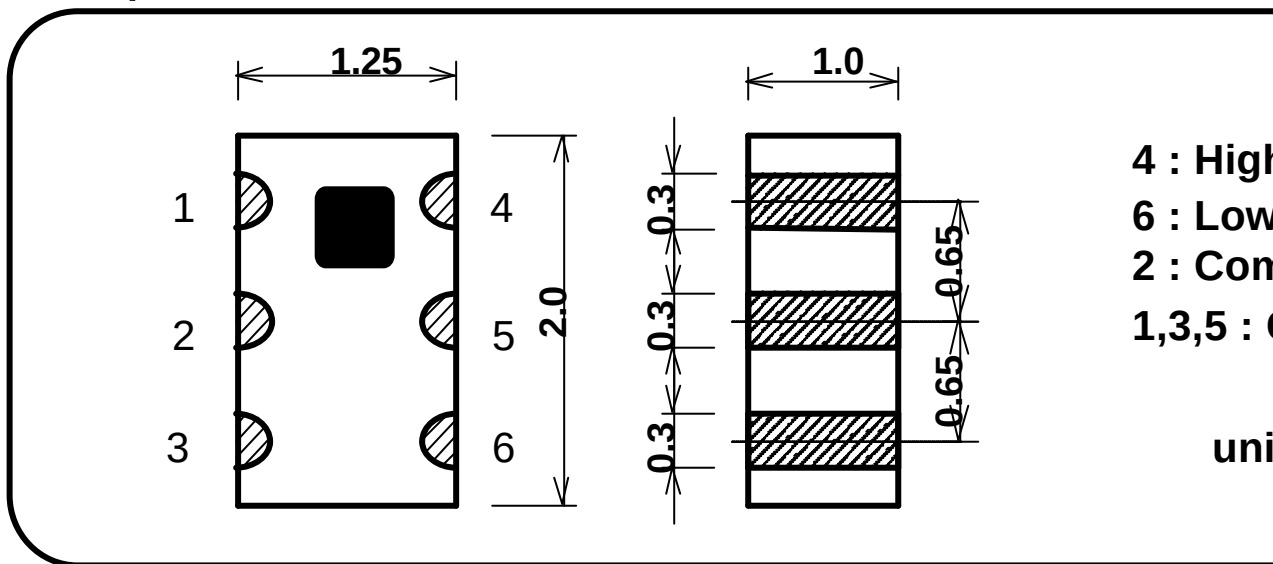

Specifications


Frequency Range	f1:824-894MHz	Attenuation
	f2:1575.42MHz +/- 1MHz	Lower <=>C
Insertion Loss in f1 Lower<=>Common	0.5dB Max.(at 25deg.C) 0.55dB Max.(at -35 ~ +85deg.C)	Attenuation Higher <=>C
Insertion Loss in f2 Higher<=>Common	0.6dB Max.(at 25deg.C) 0.65dB Max.(at -35 ~ +85deg.C)	Power Cap Temperatur
Return Loss (all port)	10dB Min.	

FSLF-S090JR SAMPLE DATA

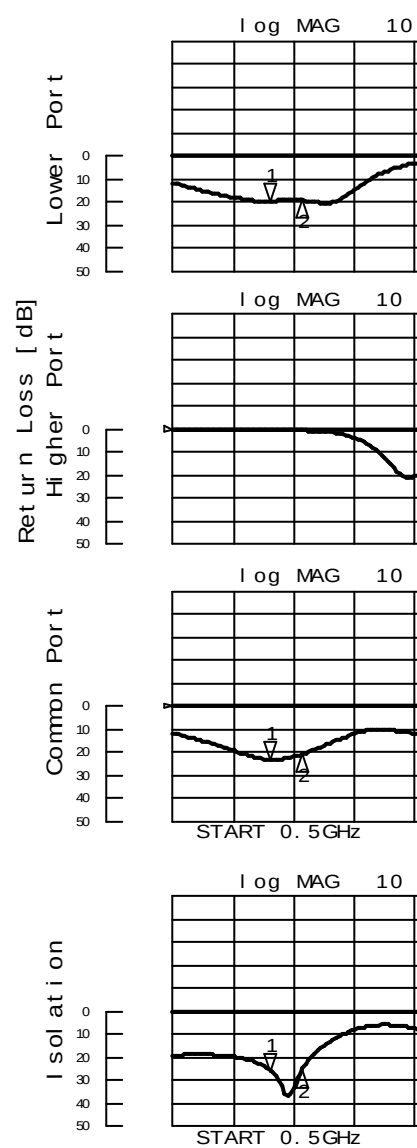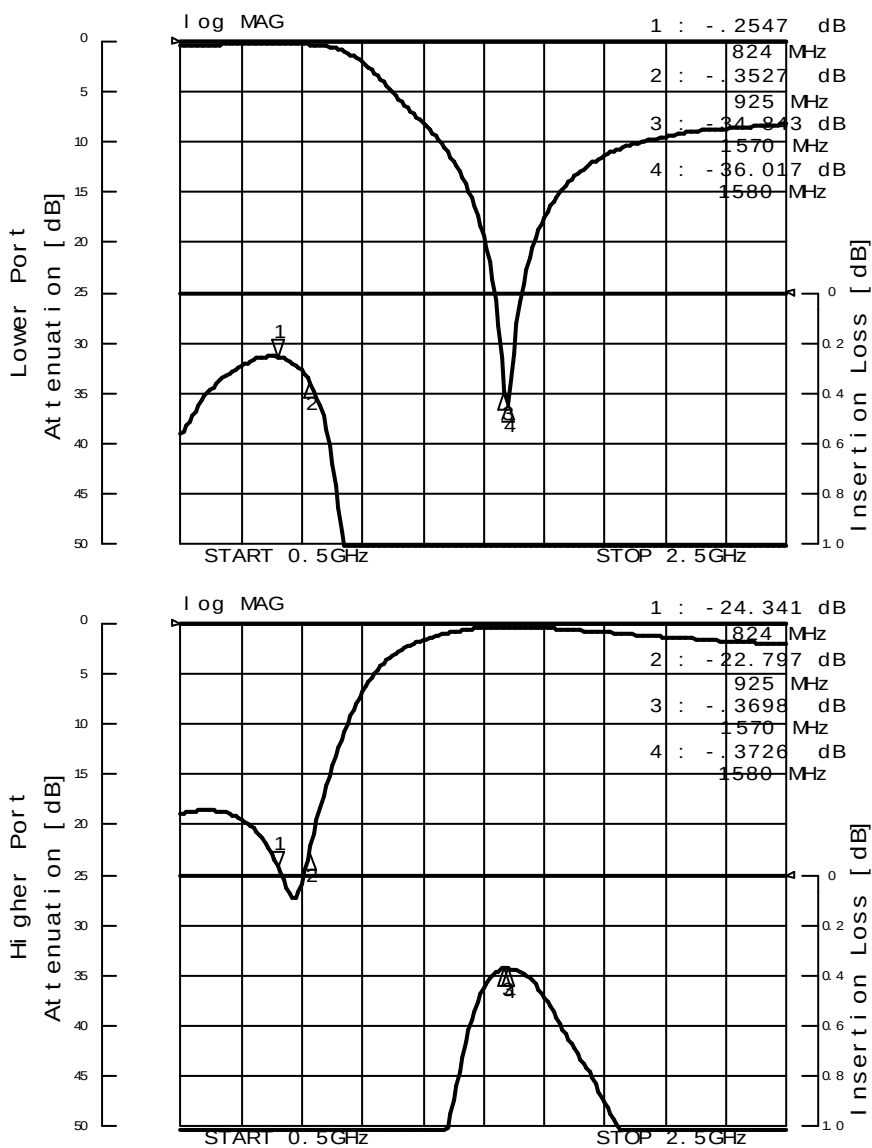

All the technical data and information contained herein are subject to change without notice.

Foot Pattern

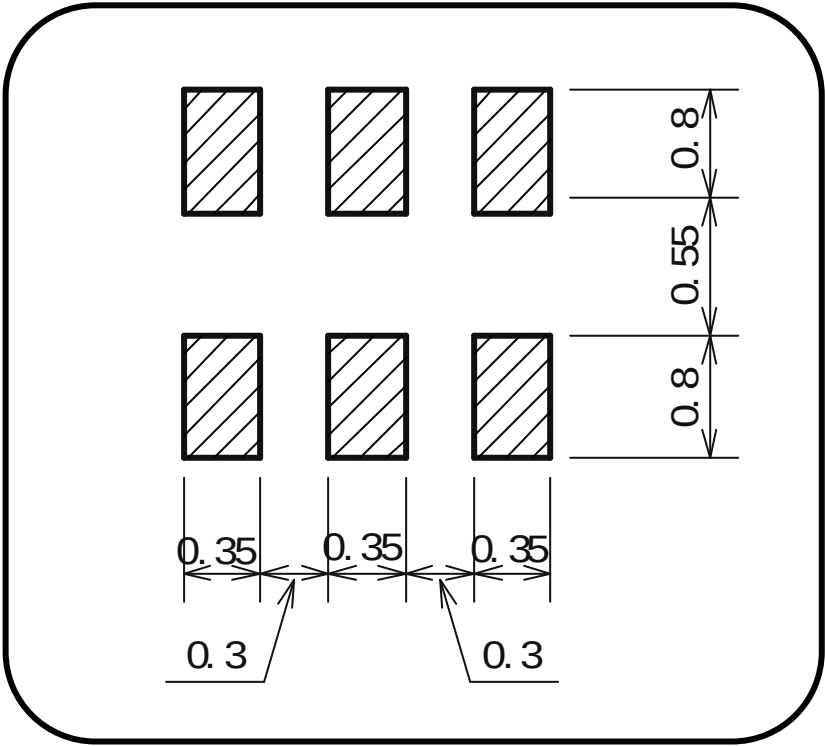

Foot Pattern

