



7x7 Square/ Single Turn /Trimming Potentiometer

-- 3323P --

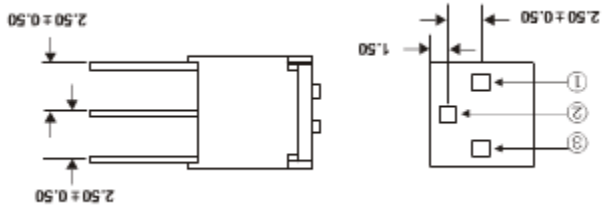


..... Mutual dimension

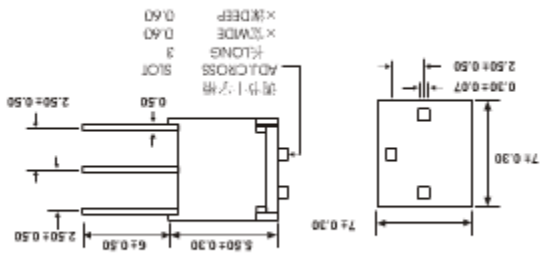

Standard Resistance Table

Resistance Code	Resistance (Ohms)	Resistance Code	Resistance (Ohms)
100	10	500	50
200	20	101	100
500	50	201	200
101	100	501	500
201	200	102	1,000
501	500	202	2,000
102	1,000	502	5,000
202	2,000	103	10,000
502	5,000	203	20,000
103	10,000	503	50,000
203	20,000	104	100,000
503	50,000	204	200,000
104	100,000	504	500,000
204	200,000	105	1,000,000
504	500,000	205	2,000,000

Special resistances available

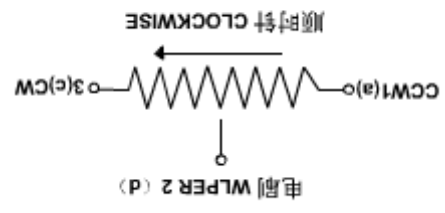

图中公式：除注明外均为±0.25
Tolerance is ± 0.25 if no identification

- Electrical Characteristics**
- Standard Resistance Range.....50Ω~2MΩ
 - Resistance.....±10%
 - Absolute Minimum Resistance.....≤1%R或10Ω
 - Contact Resistance Variation.....CRV≤3%或5Ω
 - Insulation Resistance.....R1≥1GΩ (500Vac)
 - Withstand Voltage.....70Vac
 - Effective Travel.....25°
- Environmental Characteristics**
- Power Rating, 315 volts max
 -0.25W@70°C,0W@100°C
 - Temperature Range.....-55°C~100°C
 - Temperature.....100°C
 - Temperature Coefficient.....±250ppm/°C
 - Temperature Variation.....55°C,30min,+100°C
 -30min 5cycles
 -ΔR≤5%R,Δ(Uab/Uac)≤5%
 - Vibration.....10~500Hz,0.75mm,6h,
 -254
 -504
 - Collision.....390m/s²,400cycles,ΔR≤5%R
- How To Order**
- 3323 P 103
- 型号 Model
式样 Style
阻值代码 Resistance Code

