
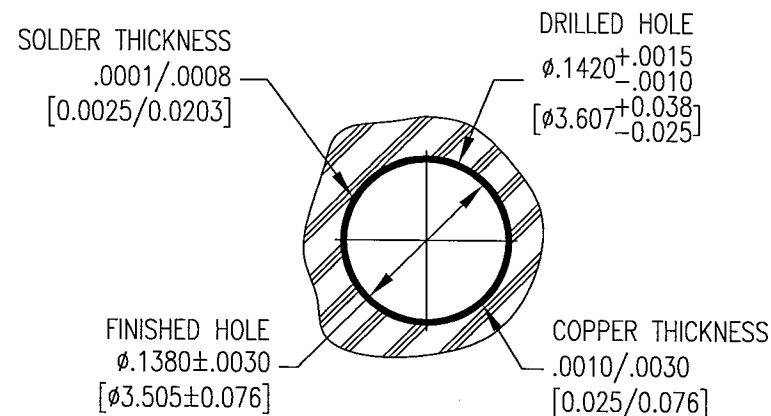


DWG. NO. 321-000-0060A			
REV	DESCRIPTION	BY DATE	APPD
C	ECR 7139	JWH 12/4/01	JWH

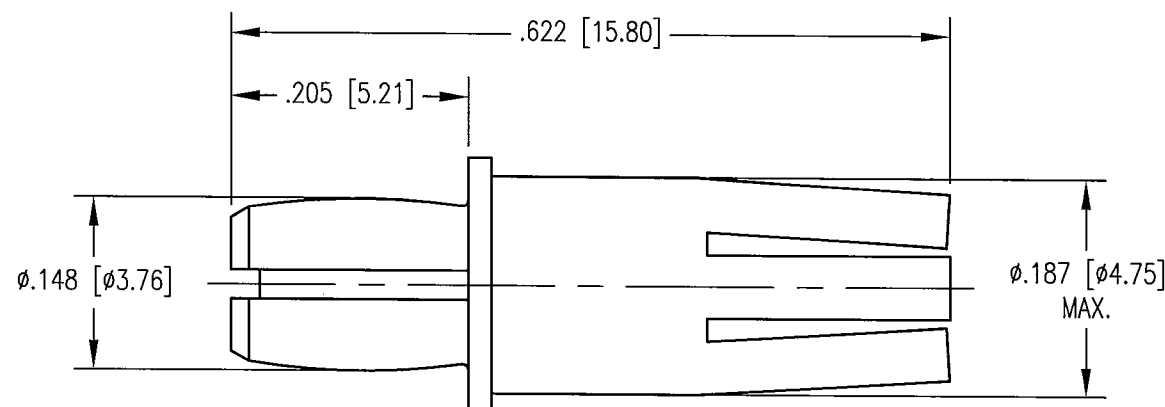

PLATED THRU HOLE REQUIREMENTS

NOTES:

1. MATERIALS:
BODY: PHOSPHOR BRONZE PER ASTM B139
INSERT: SILICONE RUBBER PER ZZ-R-765
2. FINISH:
BODY: .000050 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
3. PERFORMANCE CHARACTERISTICS:
CONTACT TO PCB:
MAX. INSERTION FORCE: 75 LBS./334 N
MIN. RETENTION FORCE: 20 LBS./89 N
4. INSTALLATION TOOL NO. 107-43847-001 REQUIRED FOR ASSEMBLY OF THIS CONTACT TO P.C. BOARD. (SEE DWG. NO. 43847)
5. THIS CONTACT MAY BE USED IN WINCHESTER SERIES 6163 DIN STYLE M C-PRESS SOCKET CONNECTOR. (SEE DWG. NO. 27936)

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]				Litton			
TOLERANCES: DECIMALS .XX ± .01/0.254 .XXX ± .005/0.127 ANGLES ± 2°				Winchester/Retconn 400 Park Road Watertown, Connecticut 06795			
SCALE: 6:1				TITLE			
CUSTOMER DRAWING				DIN HIGH POWER RECEPTACLE 40 AMP, PRESS-FIT			
DRAWN JWH	DATE 10/25/01	CHECKED MJF	DATE 10/25/01	A			
APPROVED JEM	DATE 10/25/01	APPROVED KJT	DATE 10/25/01	321-000-0060A			
				SHT.	OF	REV.	
				1	1	C	