
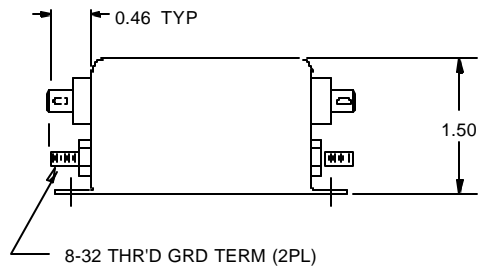

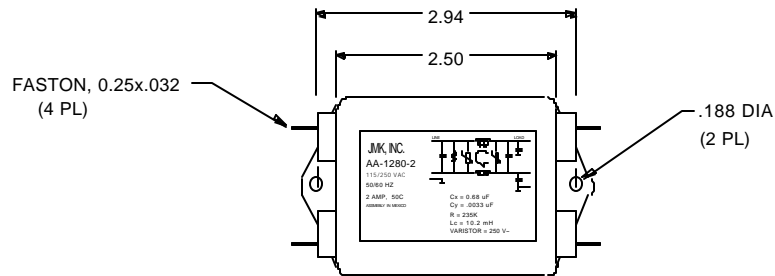
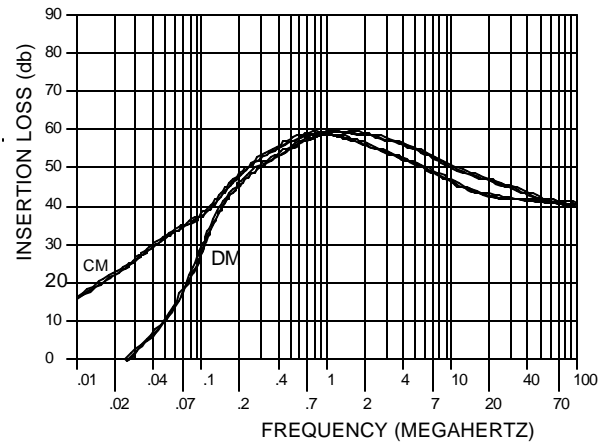


Operating Voltage = 115/250 V~  
 Operating Current = 2 Amps  
 Operating Frequency = 50 / 60 Hz  
 Temperature Range = -30 TO 50 Deg. C  
 Diel. Withstand (L-CASE) = 1500 V~ FOR 1 MIN.  
 Diel. Withstand (L-L) = 1500 Vdc For 1 Min.  
 Leakage Current = 0.5 ma @ 250 V~, 60 Hz  
 Discharge Volt after 1.0 second = 35 V Max.  
 Transient Clamping voltage = 354—432 volts

Order P/N: AA-1280-2

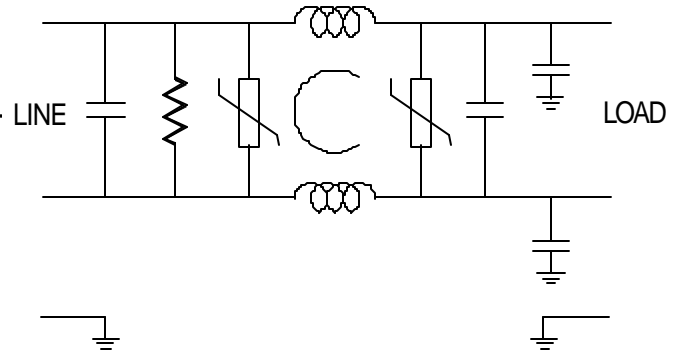

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115  
 email: info@jmkfilters.com  
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 FX: 44-(0) 141-589-1884