



### 1. Mechanical:

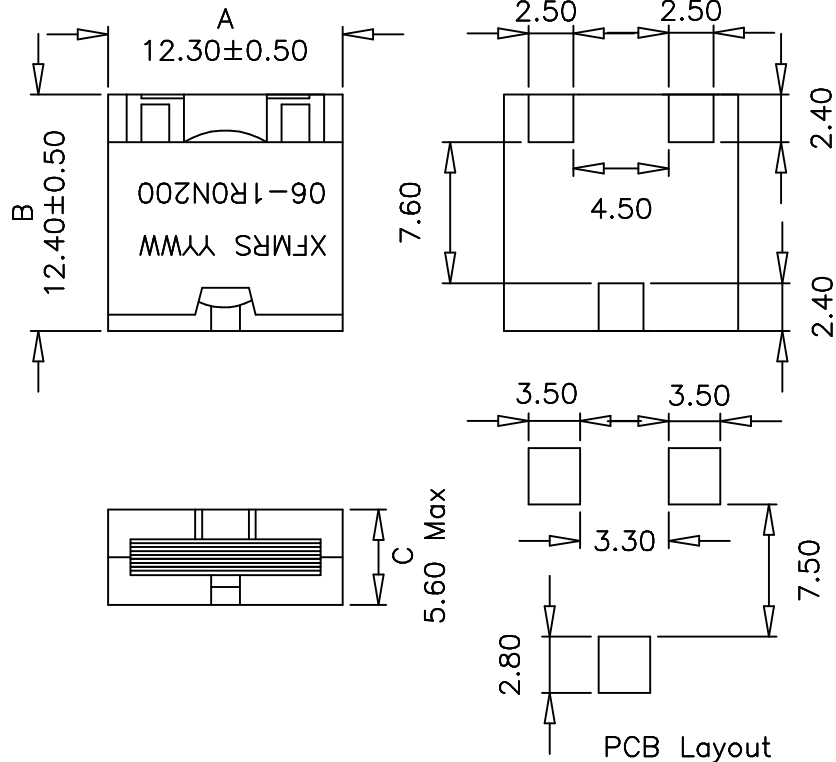

**Notes:**

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Operating Temperature Range: 0°C to +70°C

### 2. Schematic:



### 3. ELECTRICAL SPECIFICATIONS: @25°C

OCL: 1.0uH±10% @100KHz, 0.25V, 0DC  
 CURRENT: 20 ADC Max, OCL DROP BY 15% Max  
 DC Res.: 2.5mOhms Max

DOC. REV A/3

<b>XFMRS Inc</b>	Title: <b>INDUCTORS</b>		
	UNLESS OTHERWISE SPECIFIED	P/N: XF121206-1R0N200	REV. A
	TOLERANCES: .xx ±0.25	DWN. 李小锋	Dec-19-01
	Dimensions in mm	CHK. 廖玉坤	Dec-19-01
SHEET 1 OF 1	APP. Isaiah M	Dec-19-01	