
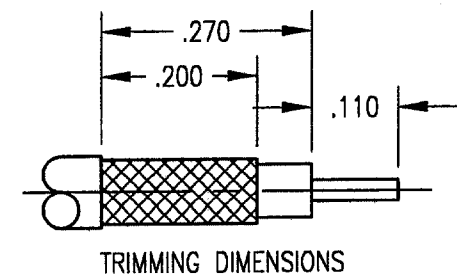


DWG. NO.		261-910-0630G	
REV	DESCRIPTION	BY DATE	APPD
E	ECN 2360	7/9/97	AT

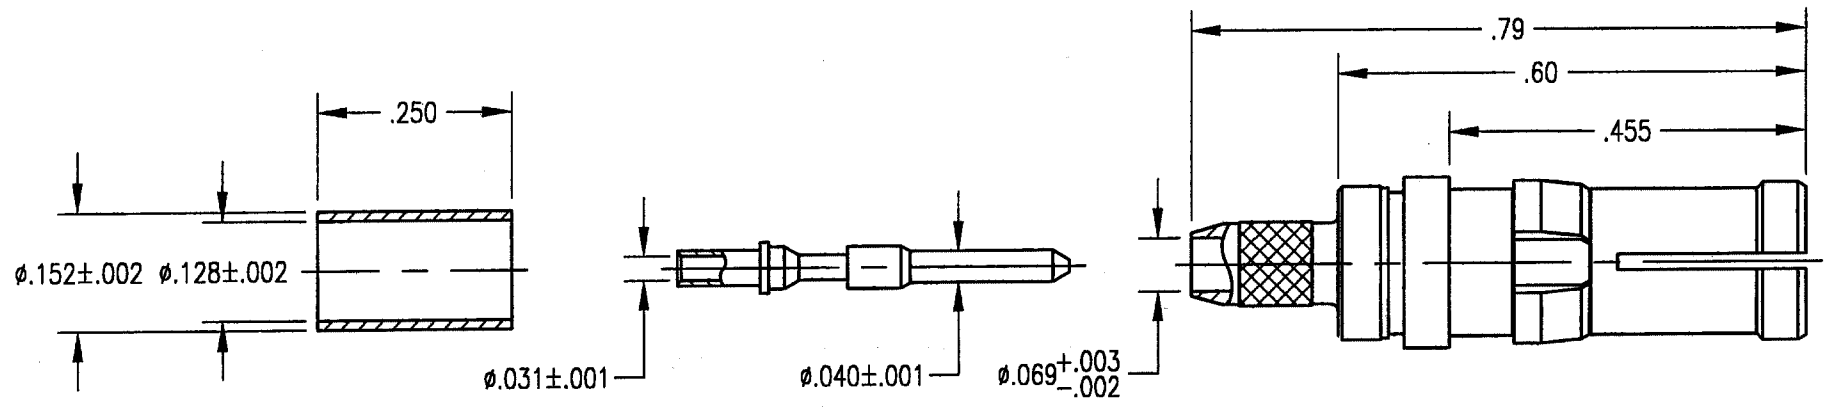

NOTES:

- MATERIALS:  
 FRONT BODY: BERYLLIUM COPPER PER ASTM B196  
 REAR BODY AND CONTACT: BRASS PER ASTM B16  
 INSULATOR: TEFLON PER ASTM D1710  
 FERRULE: BRASS PER ASTM B16  
 CLIP RING: BERYLLIUM COPPER PER ASTM B194
- FINISH:  
 BODIES AND CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER  
 .000050 MIN. NICKEL PER QQ-N-290  
 CLIP RING: .000100 MIN. NICKEL PER QQ-N-290 OVER COPPER  
 FLASH  
 FERRULE: .000005 MIN. GOLD PER MIL-G-45204 OVER .000050 MIN.  
 NICKEL PER QQ-N-290
- FOR ASSEMBLY USE CAP 9-07 WITH ABOVE TRIM DIMENSIONS

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES OR INCHES/MM				<b>Litton</b>			
TOLERANCES: .XX ± .01/0.254 .XXX ± .005/0.127 ANGLES ± Z°                   SCALE: 4:1				400 Park Road Wolcott, Connecticut 06795			
<b>CUSTOMER DRAWING</b>				<b>Winchester Electronics/RETCONN</b>			
DRAWN: KJT      DATE: 7/9/97      CHECKED: JMC      DATE: 7/9/97				TITLE: RDM CRIMP/CRIMP RECEPTCLE WITH CAPTIVE CENTER CONTACT			
APPROVED: AT      DATE: 7/9/97      APPROVED: AT      DATE: 7/9/97				A 261-910-0630G		SHT. OF REV. 1 1 E	