




## FEATURES

- The three-layer, two-terminal, axial-lead, hermetically sealed diacs are designed specifically for triggering thyristors. They demonstrate low breakdown current at breakdown voltage as they withstand peak pulse current. The breakdown symmetry is within three volts(DB3,DC34,DB4) or four volts(DB6). These diacs are intended for use in thyristor phase control, circuits for lamp dimming, universal motor speed control and heat control.
- JF's DB3/DC34/DB4/DB6 are bi-directional triggered diode designed to operate in conjunction with Triacs and SCR's
- High temperature soldering guaranteed: 260°C/10 seconds at terminals


## MECHANICAL DATA

- Case: DO-35 glass case
- Weight: Approx. 0.13 gram

## ABSOLUTE RATINGS(LIMITING VALUES)



## DO-35(GLASS)

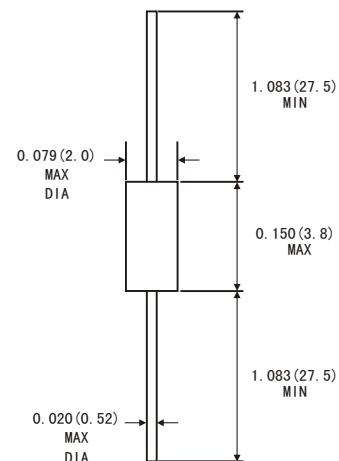

## ELECTRICAL CHARACTERISTICS

Symbols	Parameters	Test Condition	Value				Units
			DB3	DC34	DB4	DB6	
P <sub>c</sub>	Power Dissipation on Printed Circuit(L=10mm)	T <sub>A</sub> =50°C	150				mW
I <sub>TRM</sub>	Repetitive Peak on-state Current	t <sub>p</sub> =10μs f=100Hz	2.0	2.0	2.0	1.6	A
T <sub>STG/TJ</sub>	Storage and Operating Junction Temperature		-40 to +125/-40 to +110				°C

Notes: 1.Electrical characteristics applicable in both forward and reverse directions.  
2.Connected in parallel with the devices.



DIAGRAM 1: Current-voltage characteristics

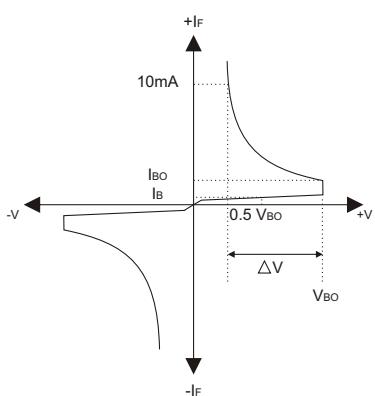


FIG.1-Power dissipation versus ambient temperature (maximum values)

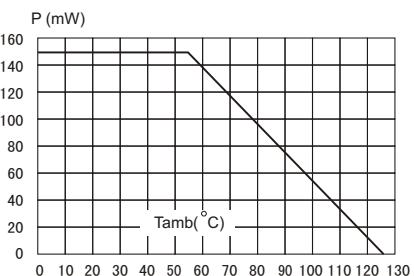


FIG.3-Peak pulse current versus pulse duration (maximum values)

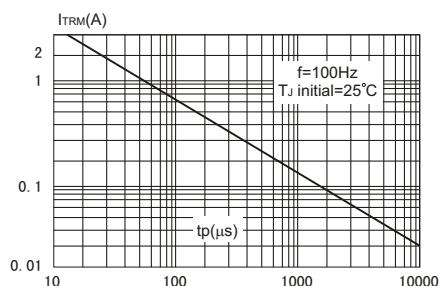


DIAGRAM 2: Test circuit for output voltage

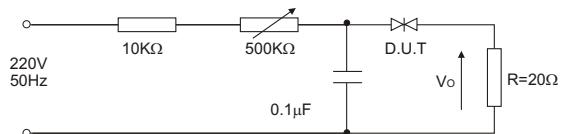


DIAGRAM 3: Test circuit see diagram2 adjust R for  $|I_P|=0.5A$

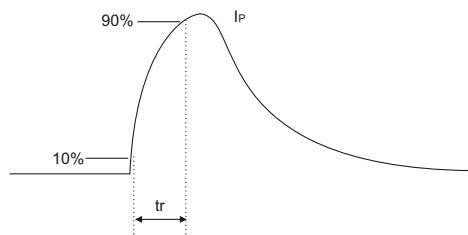


FIG.2-Relative variation of  $V_{BO}$  versus junction temperature(typical values)

