




**Pomona  
ACCESS**

**FAX ON DEMAND** This symbol indicates immediate Fax-On-Demand Technical Information is available. Dial (U.S.) (800) 444-6785, (Outside U.S.) (909) 469-2991. Enter the Pomona Access number (shown in italics) when prompted.

Patch Cords and Test Leads

**MULTI-STACKING BANANA PLUG PATCH CORD**



**Model B** Multi-Stacking Banana Plug Patch Cord features a nickel plated finish.  
18 AWG Wire, .144 O.D.  
RATING: 5000 VDC, 15 Amps, +55°C (+131°F) Max.  
\*STD COLORS: -0 blk, -2 red.

<b>Pomona ACCESS</b>	Part No.	Length	PRICE
90534	B-4-*	4"	3.70
	B-8-*	8"	3.70
	B-12-*	12"	3.70
	B-18-*	18"	3.70
	B-24-*	24"	3.70
	B-36-*	36"	3.70
	B-48-*	48"	4.10
	B-60-*	60"	4.10
	B-72-*	72"	4.10

**Model 2948** Multi-Stacking Banana Plug Patch Cord features a gold plated finish.  
\*STD COLORS: -0 blk, -2 red.

<b>Pomona ACCESS</b>	Part No.	Length	Special Features	PRICE
90534	2948-12-*	12"	Gold Plated Finish	6.35
	2948-24-*	24"		6.35
	2948-36-*	36"		6.35
	2948-48-*	48"		6.65
	2948-60-*	60"		6.65


**CROSS STACKING BANANA PLUG PATCH CORD**



18 AWG Wire, .144 O.D.  
RATING: 5000 VDC, 15 Amps, +55°C (+131°F) Max.  
\*STD COLORS: -0 blk, -2 red.

<b>Pomona ACCESS</b>	Part No.	Length	PRICE
90544	1440-8-*	8"	5.55
	1440-12-*	12"	5.55
	1440-18-*	18"	5.55
	1440-24-*	24"	5.55
	1440-36-*	36"	5.55
	1440-48-*	48"	5.55
	1440-60-*	60"	5.55

**HORIZONTAL STACKING BANANA PLUG PATCH CORD**



18 AWG Wire, .144 O.D.  
RATING: 5000 VDC, 15 Amps, +55°C (+131°F) Max.  
\*STD COLORS: -0 blk, -2 red.

<b>Pomona ACCESS</b>	Part No.	Length	PRICE
90535	HB-12-*	12"	5.85
	HB-24-*	24"	5.85
	HB-36-*	36"	5.85
	HB-48-*	48"	6.25
	HB-60-*	60"	6.25

**MULTI-STACKING BANANA PLUG COILED PATCH CORD**

One patch cord replaces many different lengths.



20 AWG Wire, .087 O.D., Extended Length: 48"  
RATING: 3000 VDC Int., 270 VDC, 90 VAC cont. duty, 5 Amps, +55°C (+131°F) Max.  
\*STD COLORS: -0 blk, -2 red.

<b>Pomona ACCESS</b>	Part No.	PRICE
90557	2484-*	9.95


**MULTI-STACKING BANANA PLUG PATCH CORD WITH IN-LINE FUSE HOLDER**



18 AWG Wire, .144 O.D.  
RATING: 5000 VDC, 15 Amps, +55°C (+131°F) Max.  
\*STD COLORS: -0 blk, -2 red.

<b>Pomona ACCESS</b>	Part No.	Length	PRICE
90593	4274-24-*	24"	11.55
	4274-36-*	36"	11.55


**MULTI-STACKING BANANA PLUG TO MINIATURE STACKING BANANA PLUG**



20 AWG Wire, .087 O.D.  
RATING: 3000 VDC, 5 Amps +55°C (+131°F) Max.  
\*STD COLORS: -0 blk, -2 red.

<b>Pomona ACCESS</b>	Part No.	Length	PRICE
90569	3014-12-*	12"	4.95
	3014-18-*	18"	4.95
	3014-24-*	24"	4.95
	3014-36-*	36"	4.95
	3014-48-*	48"	5.35
	3014-60-*	60"	5.35


**MULTI-STACKING BANANA PLUG TO STACKING PIN TIP PLUG**



20 AWG Wire, .087 O.D.  
RATING: 3000 VDC, 5 Amps, +55°C (+131°F) Max.  
\*STD COLORS: -0 blk, -2 red.

<b>Pomona ACCESS</b>	Part No.	Length	PRICE
90430	1126-4-*	4"	4.35
	1126-8-*	8"	4.35
	1126-12-*	12"	4.35
	1126-18-*	18"	4.35
	1126-24-*	24"	4.35
	1126-36-*	36"	4.35
	1126-48-*	48"	4.55
	1126-60-*	60"	4.55

**RIGHT ANGLE STACKING BANANA PLUG PATCH CORD**

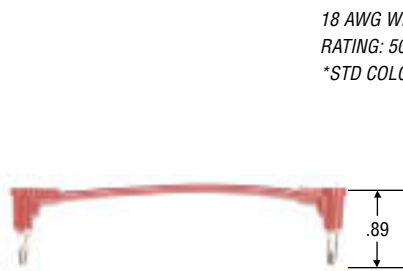

18 AWG Wire, .144 O.D.  
RATING: 5000 VDC, 15 Amps, +55°C (+131°F) Max.  
\*STD COLORS: -0 blk, -2 red.

<b>Pomona ACCESS</b>	Part No.	Length	PRICE
90559	2864-4-*	4"	6.60
	2864-8-*	8"	6.60
	2864-12-*	12"	6.60
	2864-18-*	18"	6.60
	2864-24-*	24"	6.60
	2864-36-*	36"	6.60
	2864-48-*	48"	6.80
	2864-60-*	60"	7.05