


GSD

1705-14

REVISIONS

ISSUE	CHANGES

JCA3242

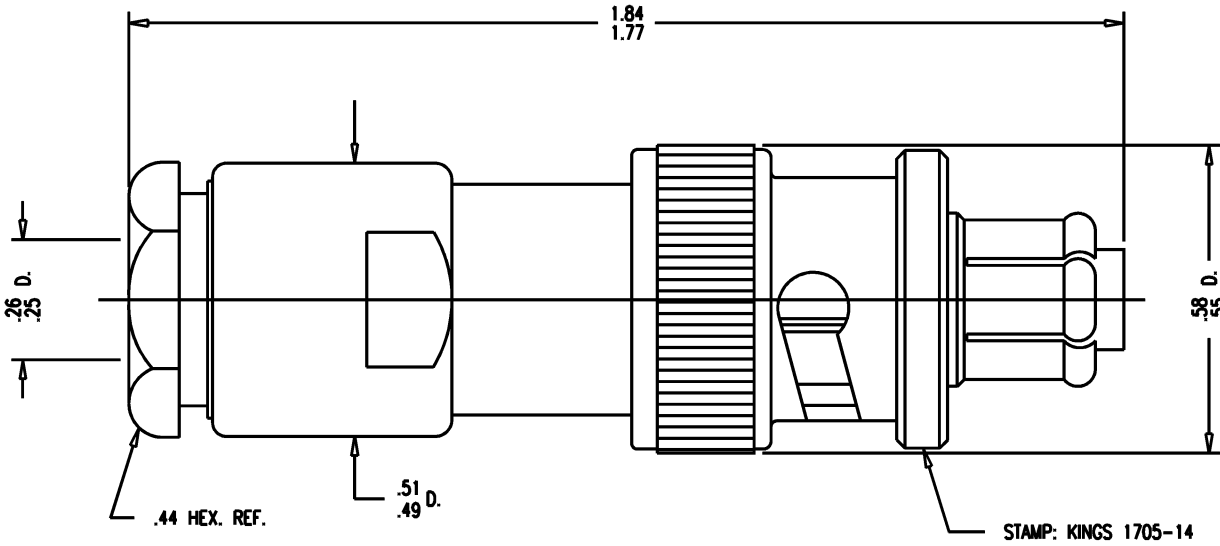

NOTES:

- FOR USE WITH RG-59, 62 & 210/U CABLE.
- FOR CABLING INSTRUCTIONS SEE CP-1001.3.
- MATERIALS:
 INSULATOR-TEFLON, ASTM-D-1457
 GASKETS-SILICONE RUBBER, Z2-R-765
 OUTER CONTACT }
 CENTER CONTACT } BER. COP., ASTM-B-196
 SPRING WASHER }
 ALL OTHER METAL PARTS-BRASS, ASTM-B16
- FINISHES:
 SPRING WASHER-SILVER PLATE PER QQ-S-365
 CENTER CONTACTS-GOLD PLATE PER MIL-G-45204
 ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE-NON-CONSTANT
 WORKING VOLTAGE-3500 VRMS

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, SHV

DRAWN JCA DATE 10/14/92

DESIGN MJB DATE 10/14/92

APPR. DATE

KINGS ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707

1705-14

GSD