

RF AMPLIFIER

MODEL *TM 6505*

Available as: TM6505, 4 Pin TO-8 (T4)
 TN6505, 4 Pin Surface Mount (SM3)
 FP6505, 4 Pin Flatpack (FP4)
 BX6505, Connectorized Housing (H1)

Features

- Medium Gain: 15 dB Typical
- Output Power: +10 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 500 MHz	5 - 500 MHz
Gain (dB)	15	14.0 Min.
Power @ 1 dB Comp. (dBm)	+10	+8.5 Min.
Reverse Isolation (dB)	-18	-16 Max.
VSWR In	<1.25:1	2.0:1 Max.
Out	<1.75:1	2.0:1 Max.
Noise figure (dB)	4.0	5.0 Max.
Power Vdc	+15	+15
mA	24	27 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +39 dBm (Typ.)
 Second Order Two Tone Intercept Point +33 dBm (Typ.)
 Third Order Two Tone Intercept Point +23 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power.....50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Typical Performance Data

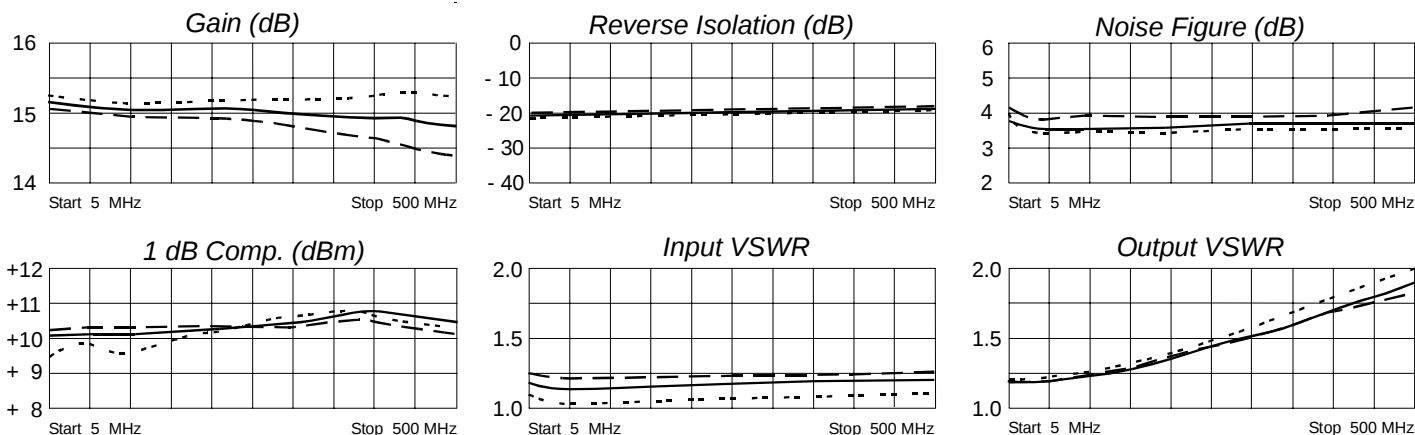

Legend ——— + 25 °C - - - + 85 °C -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.08	-3	5.80	-178	.10	2	.05	1.14
50	.07	-7	5.70	170	.10	-0	.05	1.16
100	.07	-10	5.69	159	.10	-2	.07	1.16
200	.08	-19	5.66	139	.10	-1	.11	1.13
300	.08	-38	5.63	118	.11	-3	.17	1.10
400	.08	-63	5.56	97	.11	-7	.24	1.05
500	.08	-92	5.44	74	.12	-10	.30	1.01



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 3/14/03

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001