

**BCW67 SERIES  
BCW68 SERIES**

**SURFACE MOUNT  
PNP SILICON TRANSISTOR**



[www.centrasemi.com](http://www.centrasemi.com)



**SOT-23 CASE**

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR BCW67 and BCW68 Series types are PNP Silicon Transistors manufactured by the epitaxial planar process, epoxy molded in a surface mount package, designed for general purpose switching and amplifier applications.

**MARKING CODE: SEE MARKING CODE TABLE ON FOLLOWING PAGE**

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$ )

Collector-Base Voltage  
Collector-Emitter Voltage  
Emitter-Base Voltage  
Continuous Collector Current  
Peak Collector Current  
Continuous Base Current  
Peak Base Current  
Power Dissipation  
Operating and Storage Junction Temperature  
Thermal Resistance

SYMBOL	BCW67	BCW68	UNITS
$V_{CB0}$	45	60	V
$V_{CEO}$	32	45	V
$V_{EBO}$		5.0	V
$I_C$		800	mA
$I_{CM}$		1.0	A
$I_B$		100	mA
$I_{BM}$		200	mA
$P_D$		350	mW
$T_J, T_{stg}$		-65 to +150	$^\circ\text{C}$
$\theta_{JA}$		357	$^\circ\text{C/W}$

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
$I_{CBO}$	$V_{CB}=\text{Rated } V_{CEO}$			20	nA
$I_{CBO}$	$V_{CB}=\text{Rated } V_{CEO}, T_A=150^\circ\text{C}$			20	$\mu\text{A}$
$I_{EBO}$	$V_{EB}=4.0\text{V}$			20	nA
$BV_{CB0}$	$I_C=10\mu\text{A}$ (BCW67)	45			V
$BV_{CB0}$	$I_C=10\mu\text{A}$ (BCW68)	60			V
$BV_{CEO}$	$I_C=10\text{mA}$ (BCW67)	32			V
$BV_{CEO}$	$I_C=10\text{mA}$ (BCW68)	45			V
$BV_{EBO}$	$I_E=10\mu\text{A}$	5.0			V
$V_{CE(SAT)}$	$I_C=100\text{mA}, I_B=10\text{mA}$			0.3	V
$V_{CE(SAT)}$	$I_C=500\text{mA}, I_B=50\text{mA}$			0.7	V
$V_{BE(SAT)}$	$I_C=100\text{mA}, I_B=10\text{mA}$			1.25	V
$V_{BE(SAT)}$	$I_C=500\text{mA}, I_B=50\text{mA}$			2.0	V
$f_T$	$V_{CE}=5.0\text{V}, I_C=50\text{mA}, f=20\text{MHz}$		200		MHz
$C_c$	$V_{CB}=10\text{V}, I_E=0, f=1.0\text{MHz}$		6.0		pF
$C_e$	$V_{EB}=0.5\text{V}, I_C=0, f=1.0\text{MHz}$		60		pF

	TEST CONDITIONS	BCW67A BCW68F		BCW67B BCW68G		BCW67C BCW68H	
		MIN	MAX	MIN	MAX	MIN	MAX
$h_{FE}$	$V_{CE}=10\text{V}, I_C=100\mu\text{A}$	35		50		80	
$h_{FE}$	$V_{CE}=1.0\text{V}, I_C=10\text{mA}$	75		120		180	
$h_{FE}$	$V_{CE}=1.0\text{V}, I_C=100\text{mA}$	100	250	160	400	250	630
$h_{FE}$	$V_{CE}=2.0\text{V}, I_C=500\text{mA}$	35		60		100	


R2 (20-November 2009)

BCW67 SERIES  
BCW68 SERIES

SURFACE MOUNT  
PNP SILICON TRANSISTOR



SOT-23 CASE - MECHANICAL OUTLINE

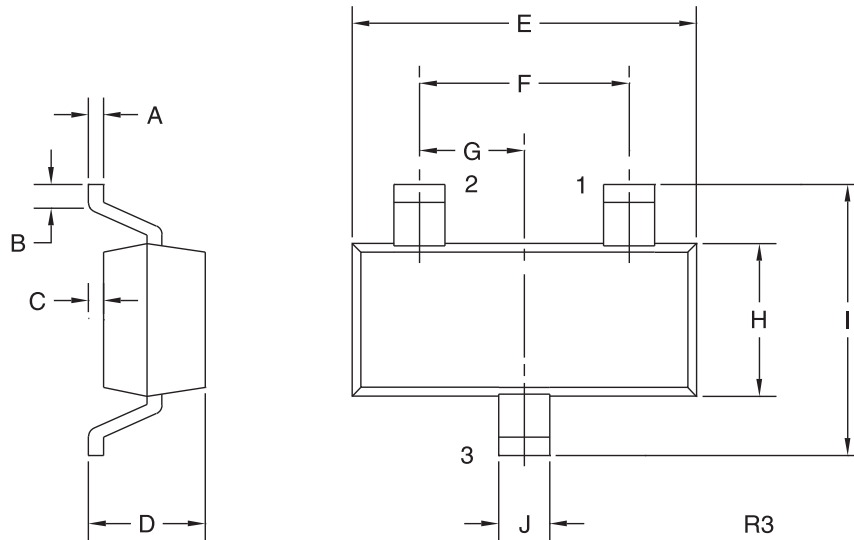

LEAD CODE:

- 1) BASE
- 2) EMITTER
- 3) COLLECTOR

DEVICE	MARKING CODE
BCW67A	DA
BCW67B	DB
BCW67C	DC
BCW68F	DF
BCW68G	DG
BCW68H	DH

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.003	0.007	0.08	0.18
B	0.006	-	0.15	-
C	-	0.005	-	0.13
D	0.035	0.043	0.89	1.09
E	0.110	0.120	2.80	3.05
F	0.075		1.90	
G	0.037		0.95	
H	0.047	0.055	1.19	1.40
I	0.083	0.098	2.10	2.49
J	0.014	0.020	0.35	0.50

SOT-23 (REV: R3)

R2 (20-November 2009)