

# 1.27X1.27mm DUAL ROW SOCKET S.M.D. TYPE

(WITH POLARIZATION KEY)




## 127150FA Series

Mates with SUYIN 127153, 127154, 127157, 127196 Series

### Specifications:

- 10-100 Circuits
- Insulator material : Black High Temp . Plastic
- Max.Processing Temp. : 230°C for 30 Seconds
- Terminal Material : Phosphor Bronze
- Plating : Selective Plated(Gold/Tin) or Full Gold Plated
- Max. Current Rating : 1.0A
- Voltage Rating : 150V AC
- Dielectric Strength : 500V (Min. 60 seconds)

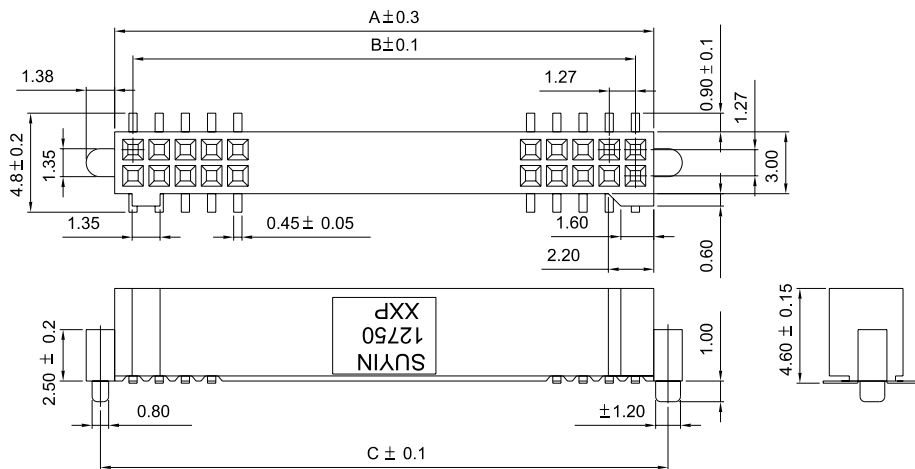

## Order Information

127150FA□□□□□09Z□  
1 2 3 4 5

1. 'A' : Straight SMT Type

2. No. of Pins

3. Plating

4. Color 'Z' : Black

5. Package

'U' : Tube Package Without CAP

'R' : Reel Package With CAP

'T' : Tube Package With CAP

Reference Page 11

## Dimensional Information

SUYIN P/NO.	NO. PINS	DIM.A	DIM.B	DIM.C
127150FA010□□□09Z□	10	6.75	5.08	8.13
127150FA016□□□09Z□	16	10.56	8.89	11.94
127150FA020□□□09Z□	20	13.0	11.43	14.48
127150FA024□□□09Z□	24	15.64	13.97	17.02
127150FA030□□□09Z□	30	19.45	17.78	20.83
127150FA040□□□09Z□	40	25.80	24.13	27.18
127150FA044□□□09Z□	44	28.34	26.67	29.72
127150FA050□□□09Z□	50	32.15	30.48	33.53
127150FA060□□□09Z□	60	38.50	36.83	39.88
127150FA068□□□09Z□	68	43.58	41.91	44.96
127150FA070□□□09Z□	70	44.85	43.18	46.23
127150FA080□□□09Z□	80	51.20	49.53	52.58
127150FA090□□□09Z□	90	57.55	55.88	58.93
127150FA100□□□09Z□	100	63.90	62.23	65.28

## Recommended P.C.B. Layout

