



P6100

10.4" TFT Industrial LCD Monitor

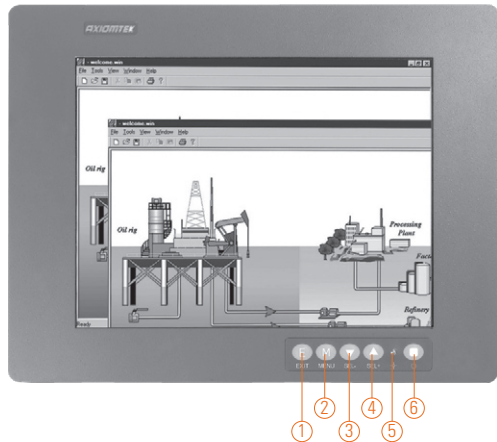

1. Exit
2. Menu
3. SEL-
4. SEL+
5. Power LED
6. Power switch

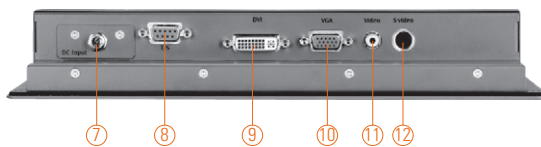

- | | |
|-------------------|-------------|
| 7. DC power input | 10. VGA |
| 8. T/S port | 11. Video |
| 9. DVI | 12. S-video |

Features

- 10.4" TFT 230 nits high brightness SVGA LCD
- NEMA 4/12 (IP65)- compliant panel mounting flat panel monitor
- Resistive type of touchscreen
- Supports full range screw-type (locked) AC-in or 24V DC-in (option)
- Supports multi-signal inputs: VGA, S-video, video and DVI
- Supports panel mount, wall mount and VESA arm



▲ Side view

Introduction

The P6100 is an ultra slim & super compact industrial LCD monitor equipped with 10.4-inch 230 nits high brightness SVGA LCD display and supports multi-signal interfaces including DVI, VGA, S-Video, and Video. Featuring NEMA4/IP65 compliant front bezel, screw-type adaptor plug design, and 12/24V DC-In means it is fit for all kinds of industrial environments. Moreover, the P6100 supports panel, wall or VESA FPMPI (Video Electronics Standards Association Flat Panel Monitor Physical Mounting Interface) mounting. With the compact mechanism design, users can enjoy free from space constraint. This compact size industrial-grade flat panel monitor is ideal for varied industrial or commercial projects, such as transportation, POI, human machine interface, and even rugged environments.

Specifications

Front Bezel	NEMA 4/12 (IP65)-compliant, metal front bezel	
Mounting	Panel mounting, wall mounting or VESA FPMPI mounting (video electronics standards association Flat Panel monitor physical mounting interface)	
LCD Panel	Display Type	10.4" TFT LCD
	Max. Resolution	800 x 600
	Max. Colors	16.8M/262k
	Active Area (mm)	211.2 x 158.4
	Pixel Pitch (mm)	0.264 x 0.264
	Response Time	35ms
	Backlight	1 CCFL
	Backlight MTBF	30,000 hrs
	Viewing Angle(H/V)	140°/120°
	Contrast Ratio	500 (TYP)
Brightness (cd/m ²)	230 nits	
Display Control	OSD (on screen display)	
Display Mode	VGA 640 x 480 (60/72Hz)	
	SVGA 800 x 600 (60/72Hz)	
Input Signal	VGA Video: R.G.B Analog 0.7v Peak-to-Peak	
	Video (optional)	
	S-Video (optional)	
	DVI	
	Touchscreen: Serial RS-232 or USB interface	

Specifications

I/O Connectors	1 x RS-232 or USB touchscreen version 1 x VGA input 1 x RCA for video (optional) 1 x S-Video for video (optional) 1 x DVI 1 x Screw-type DC power input
Power Adapter	Screw-type external AC / DC power adapter
Touchscreen	Thickness Resistive: 2.2mm Light Transmission Resistive: 80% Power Consumption Resistive: +5V @ 100mA Touch Life Resistive: 35million touches Controller interface: RS-232 D-type 9-pin male connector or USB connector
Dimensions	294.2 mm (11.58") (W) x 46.6 mm (1.83") (D) x 231.2 mm (9.1") (H)
Packing Dimensions	380 mm (14.96") (W) x 190 mm (7.48") (D) x 430 mm (16.93") (H)
Weight (net/gross)	2.6 kg (5.73 lb)/5.1 kg (11.24 lb)
Environment	Operating temperature: -10°C ~ +60°C (14°F ~ 140°F) Storage temperature: -30°C ~ +80°C (-22°F ~ +176°F) Relative humidity: 20% ~ 90%, non-condensing
Certification	CE

Ordering Information

P6100		
AC Power	Panel Mount Monitor	
	Resistive	P6100PR-AC-RS
	Resistive (USB)	P6100PR-AC-U
24VDC Power	Panel Mount Monitor	
	Resistive	P6100PR-24VDC-RS
	Resistive (USB)	P6100PR-24VDC-U
	Glass	P6100PG-AC

P6100L		
AC Power	Panel Mount Monitor	
	Resistive (RS-232)	P6100LPR-AC-RS
	Resistive (USB)	P6100LPR-AC-U
24VDC Power	Panel Mount Monitor	
	Resistive	P6100LPR-24VDC-RS
	Resistive (USB)	P6100LPR-24VDC-U
	Glass	P6100LPG-24VDC

* Specification and certifications are based on options and may vary.

Optional Accessories

ARM-VM-101	VESA ARM (clamp type)
ARM-VM-105	VESA ARM (wall mount type)
Wall mounting & desktop stand	



▲ Stand kit



▲ Various mounting ways
Panel/Wall/VESA



▲ Phoenix-type power input

Dimensions

