

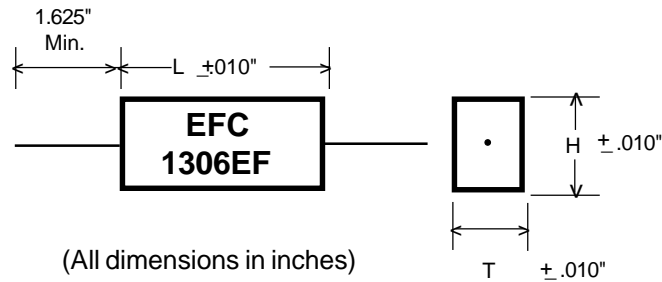
**1306EF****Epoxy Case
(Axial Leads)**Lead Specs.

Tinned Copperweld

Under .190T = 24 AWG

.190 - .380T = 22 AWG

Above .380T = 20 AWG

**Polyester (Mylar®)
and Foil
Capacitors****DIMENSIONS and RATINGS**

Cap.	1306EF-1 50 VDC			1306EF-2 100 VDC			1306EF-2 150 VDC			1306EF-3 200 VDC			1306EF-3 400 VDC			1306EF-3 600 VDC		
μF	T	H	L	T	H	L	T	H	L	T	H	L	T	H	L	T	H	L
.001	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570
.0012	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570
.0015	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570
.0022	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570	.170	.290	.570
.0027	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570	.230	.360	.550
.0039	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570	.230	.360	.550
.0047	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.420	.170	.290	.570	.290	.420	.570
.0056	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.420	.170	.290	.570	.290	.420	.570
.0068	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570	.230	.360	.550	.290	.420	.570
.0082	.160	.240	.420	.160	.240	.420	.170	.290	.420	.170	.290	.570	.230	.360	.550	.290	.420	.670
.01	.160	.240	.420	.170	.290	.420	.170	.290	.570	.170	.290	.570	.230	.360	.550	.290	.420	.670
.012	.160	.240	.420	.170	.290	.420	.170	.290	.570	.170	.290	.570	.230	.360	.550	.290	.420	.670
.015	.170	.290	.420	.170	.290	.570	.170	.290	.570	.230	.360	.550	.290	.420	.570	.290	.420	.670
.018	.170	.290	.570	.170	.290	.570	.170	.290	.570	.230	.360	.550	.290	.420	.570	.290	.420	.820
.022	.170	.290	.570	.170	.290	.570	.230	.360	.550	.230	.360	.550	.290	.420	.670	.290	.420	.820
.027	.170	.290	.570	.230	.360	.550	.230	.360	.550	.230	.360	.550	.290	.420	.670	.390	.540	.820
.033	.170	.290	.570	.230	.360	.550	.230	.360	.550	.290	.420	.570	.290	.420	.820	.390	.540	.820
.039	.170	.290	.570	.230	.360	.550	.230	.360	.550	.290	.420	.670	.290	.420	.820	.390	.540	.820
.047	.230	.360	.550	.230	.360	.550	.290	.420	.570	.290	.420	.670	.390	.540	.820	.390	.540	1.040
.056	.230	.360	.550	.290	.420	.570	.290	.420	.570	.290	.420	.670	.390	.540	.820	.390	.540	1.040
.068	.230	.360	.550	.290	.420	.570	.290	.420	.670	.290	.420	.670	.390	.540	.820	.390	.540	1.240
.082	.290	.420	.570	.290	.420	.570	.290	.420	.670	.290	.420	.820	.390	.540	.820	.390	.540	1.240
.1	.290	.420	.570	.290	.420	.670	.290	.420	.670	.390	.540	.820	.390	.540	1.040	.560	.720	1.240
.12	.290	.420	.570	.290	.420	.670	.290	.420	.820	.390	.540	.820	.390	.540	1.240	.560	.720	1.240
.15	.290	.420	.670	.290	.420	.820	.390	.540	.820	.390	.540	.820	.390	.540	1.240	.560	.720	1.240
.18	.290	.420	.670	.390	.540	.820	.390	.540	.820	.390	.540	1.040	.560	.720	1.240			
.22	.290	.420	.820	.390	.540	.820	.390	.540	.820	.390	.540	1.240	.560	.720	1.240			
.27	.290	.420	.820	.390	.540	.820	.390	.540	1.040	.390	.540	1.240	.560	.720	1.240			
.33	.390	.540	.820	.390	.540	1.040	.390	.540	1.240	.560	.720	1.240						
.39	.390	.540	.820	.390	.540	1.040	.390	.540	1.240	.560	.720	1.240						
.47	.390	.540	.820	.390	.540	1.240	.560	.720	1.240	.560	.720	1.240						
.56	.390	.540	1.040	.390	.540	1.240	.560	.720	1.240	.560	.720	1.240						
.68	.390	.540	1.240	.560	.720	1.240	.560	.720	1.240									
.82	.390	.540	1.240	.560	.720	1.240	.560	.720	1.240									
1.0	.560	.720	1.240	.560	.720	1.240												
1.25	.560	.720	1.240	.560	.720	1.240												
1.5	.560	.720	1.240															

ELECTRONIC FILM CAPACITORS, INC.

Reidville Industrial Park * 41 Interstate Lane * WATERBURY, CONNECTICUT 06705

Phone (203) 755-5629

FAX (203) 755-0659

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.