


# Schottky MiniMod

## FST6380 — FST63100

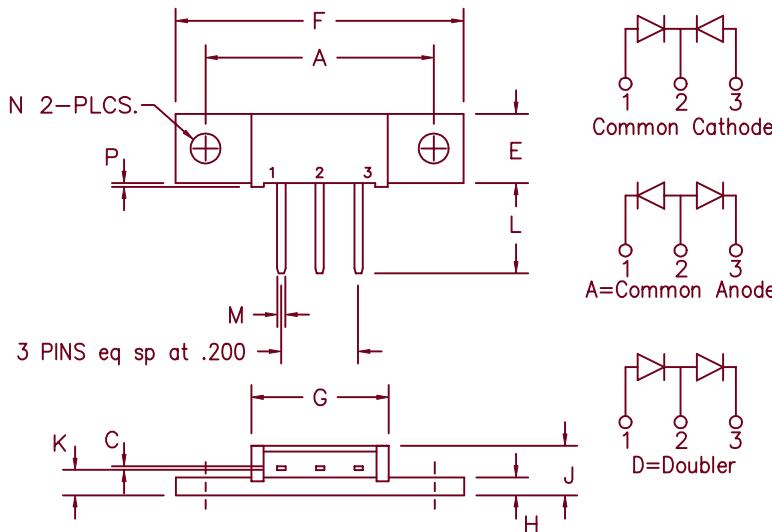

	Dim. Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	1.180	1.195	29.97	30.35	
C	.025	.035	0.64	0.89	
E	.350	.370	8.89	9.40	
F	1.490	1.510	37.85	38.35	
G	.695	.715	17.65	18.16	
H	.088	.098	2.24	2.49	
J	.240	.260	6.10	6.60	
K	.115	.135	2.92	3.43	
L	.460	.480	11.68	12.19	
M	.034	.046	0.86	1.17	
N	.151	.161	3.84	4.09	
P	.015	.025	0.38	0.64	Dia.

Microsemi  
Catalog Number

Industry  
Part Number

Working  
Peak Reverse  
Voltage

Repetitive  
Peak Reverse  
Voltage

FST6380\*  
FST6390\*  
FST63100\*

63CNQ080  
63CNQ100

80V  
90V  
100V

80V  
90V  
100V

- Schottky Barrier Rectifier
- Guard Ring Protection
- 2X30 Amperes avg.
- 175°C Junction Temperature
- Reverse Energy Tested
- $V_{RRM}$  – 80 to 100 Volts

\*Add the Suffix A for Common Anode, D for Doubler

### Electrical Characteristics

Average forward current per pkg

|  $I_F(AV)$  60 Amps

$T_C = 150^\circ\text{C}$ , Square wave,  $R_{\theta JC} = 0.5^\circ\text{C}/\text{W}$

Average forward current per leg

|  $I_F(AV)$  30 Amps

$T_C = 150^\circ\text{C}$ , Square wave,  $R_{\theta JC} = 1.0^\circ\text{C}/\text{W}$

Maximum surge current per leg

|  $I_{FSM}$  600 Amps

8.3 ms, half sine,  $T_J = 175^\circ\text{C}$

Max repetitive peak reverse current per leg

|  $I_{R(OV)}$  2 Amps

$f = 1 \text{ KHZ}, 25^\circ\text{C}, 1 \text{ usec square wave}$

Max peak forward voltage per leg

|  $V_{FM}$  0.60 Volts

|  $V_{FM} = 30A: T_J = 175^\circ\text{C}^*$

Max peak forward voltage per leg

|  $V_{FM}$  0.82 Volts

|  $V_{FM} = 30A: T_J = 25^\circ\text{C}^*$

Max peak reverse current per leg

|  $I_{RM}$  20 mA

$V_{RRM}, T_J = 125^\circ\text{C}^*$

Max reverse current per leg

|  $I_{RM}$  1.5 mA

$V_{RRM}, T_J = 25^\circ\text{C}$

Typical junction capacitance per leg

|  $C_J$  1000 pF

$V_R = 5.0V, T_C = 25^\circ\text{C}$

\*Pulse test: Pulse width 300 usec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range

$T_{STG}$

-55°C to 175°C

Operating junction temp range

$T_J$

-55°C to 175°C

Max thermal resistance per leg

$R_{\theta JC}$

1.0°C/W Junction to case

Max thermal resistance per pkg

$R_{\theta JC}$

0.5°C/W Junction to case

Typical thermal resistance (greased)

$R_{\theta CS}$

0.3°C/W Case to sink

Mounting Base Torque

10 inch pounds maximum

Weight

0.3 ounce (8.4 grams) typical

# FST6380—FST63100

Figure 1  
Typical Forward Characteristics – Per Leg

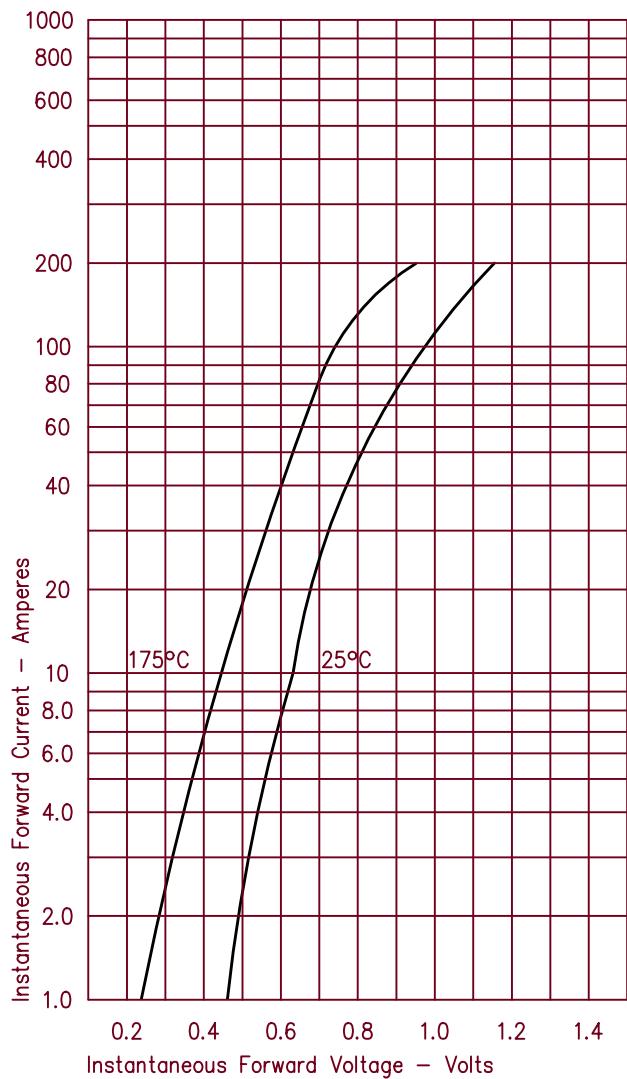


Figure 2  
Typical Reverse Characteristics – Per Leg

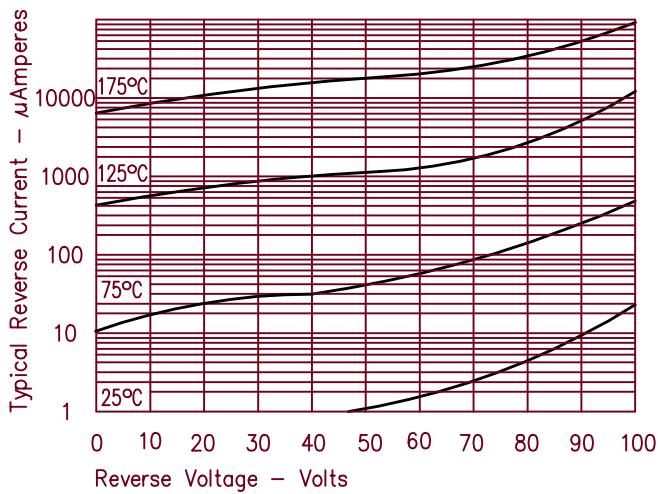


Figure 3  
Typical Junction Capacitance – Per Leg

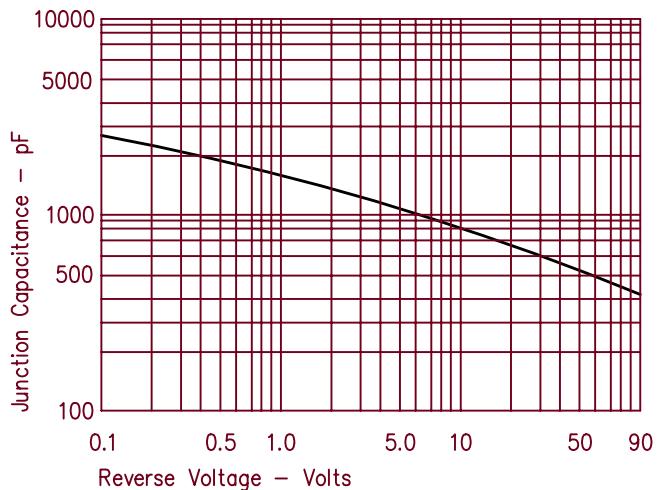


Figure 4  
Forward Current Derating – Per Leg

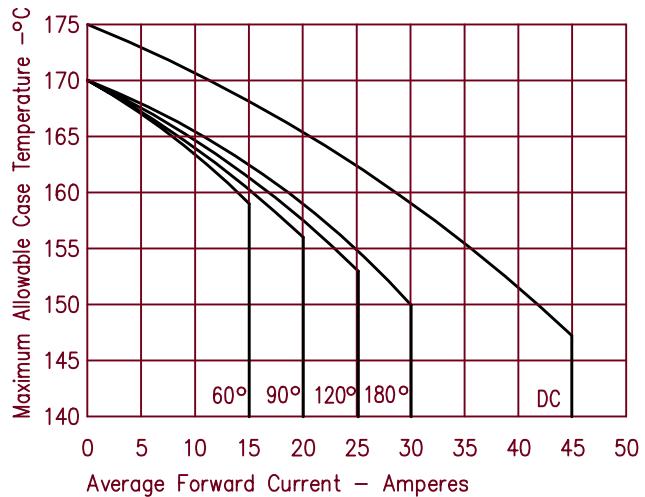


Figure 5  
Maximum Forward Power Dissipation – Per Leg

