


International  
**IR** Rectifier

## QUIETIR Series 10ETF..FP

### FAST SOFT RECOVERY RECTIFIER DIODE



$$V_F < 1.33V @ 10A$$

$$t_{rr} = 80ns$$

$$V_{RRM} 1000, 1200V$$

#### Description/ Features

The 10ETF..FP fast soft recovery *QUIETIR* rectifier series has been optimized for combined short reverse recovery time and low forward voltage drop.

The glass passivation ensures stable reliable operation in the most severe temperature and power cycling conditions.


Typical applications are both:

- output rectification and freewheeling in inverters, choppers and converters
- and input rectifications where severe restrictions on conducted EMI should be met.

#### Major Ratings and Characteristics

Characteristics	10ETF..FP	Units
$I_{F(AV)}$ Sinusoidal waveform	10	A
$V_{RRM}$	1000 to 1200	V
$I_{FSM}$	160	A
$V_F$ @ 10 A, $T_J = 25^\circ C$	1.33	V
$t_{rr}$ @ 1 A, 100 A/ $\mu s$	80	ns
$T_J$	-40 to 150	$^\circ C$

#### Package Outline

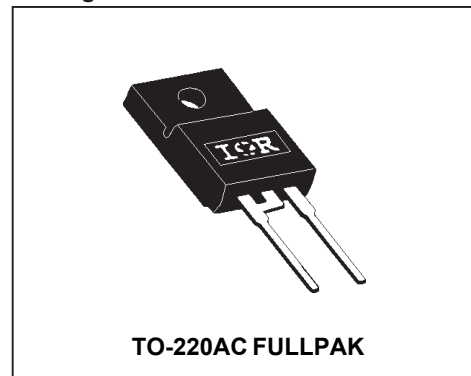

Voltage Ratings

Part Number	$V_{RRM}$ , maximum peak reverse voltage V	$V_{RSM}$ , maximum non repetitive peak reverse voltage V	$I_{RRM}$ 150°C mA
10ETF10FP	1000	1100	4
10ETF12FP	1200	1300	

Absolute Maximum Ratings

Parameters	10ETF..FP	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current	10	A	@ $T_C = 95^\circ\text{C}$ , 180° conduction half sine wave
$I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current	160	A	10ms Sine pulse, rated $V_{RRM}$ applied
	185		10ms Sine pulse, no voltage reapplied
$I^2t$ Max. $I^2t$ for fusing	128	$A^2s$	10ms Sine pulse, rated $V_{RRM}$ applied
	180		10ms Sine pulse, no voltage reapplied
$I^2\sqrt{t}$ Max. $I^2\sqrt{t}$ for fusing	1800	$A^2\sqrt{s}$	t = 0.1 to 10ms, no voltage reapplied


Electrical Specifications

Parameters	10ETF..FP	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop	1.33	V	@ 10A, $T_J = 25^\circ\text{C}$
$r_t$ Forward slope resistance	22.9	$m\Omega$	$T_J = 150^\circ\text{C}$
$V_{F(TO)}$ Threshold voltage	0.96	V	
$I_{RM}$ Max. Reverse Leakage Current	0.1	mA	$T_J = 25^\circ\text{C}$
	4		$T_J = 150^\circ\text{C}$

$V_R = \text{rated } V_{RRM}$

Recovery Characteristics

Parameters	10ETF..FP	Units	Conditions
$t_{rr}$ Reverse Recovery Time	310	ns	$I_F @ 10\text{Apk}$
$I_{rr}$ Reverse Recovery Current	4.7	A	@ 25A/ $\mu\text{s}$
$Q_{rr}$ Reverse Recovery Charge	1.05	$\mu\text{C}$	@ 25°C
S Typical Snap Factor	0.6		



Thermal-Mechanical Specifications

Parameters		10ETF..FP	Units	Conditions
$T_J$	Max. Junction Temperature Range	-40 to 150	°C	
$T_{stg}$	Max. Storage Temperature Range	-40 to 150	°C	
$R_{thJC}$	Max. Thermal Resistance Junction to Case	2.5	°C/W	DC operation
$R_{thJA}$	Max. Thermal Resistance Junction to Ambient	62	°C/W	
$R_{thCS}$	Typical Thermal Resistance, Case to Heatsink	0.5	°C/W	Mounting surface , smooth and greased
wt	Approximate Weight	2 (0.07)	g (oz.)	
T	Mounting Torque	Min.	6 (5)	Kg-cm (lbf-in)
		Max.	12 (10)	
Case Style		TO-220AC FULLPAK	JEDEC	

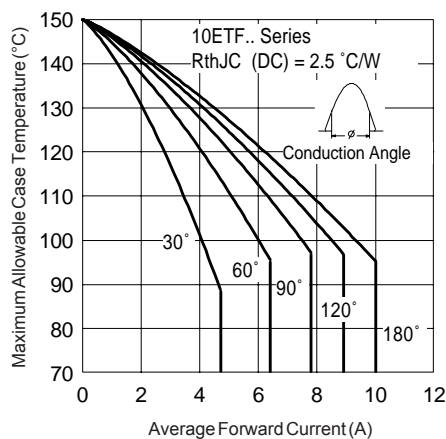


Fig. 1 - Current Rating Characteristics

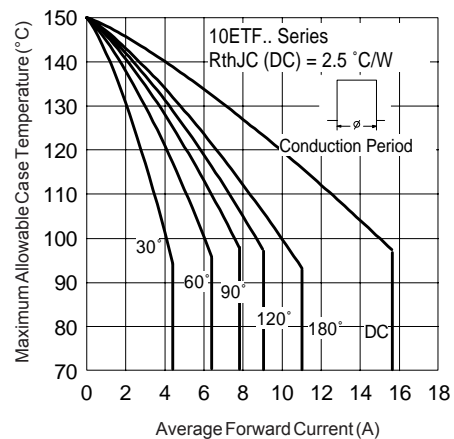


Fig. 2 - Current Rating Characteristics

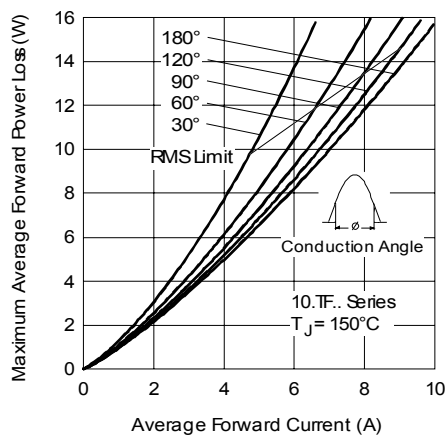


Fig. 3 - Forward Power Loss Characteristics

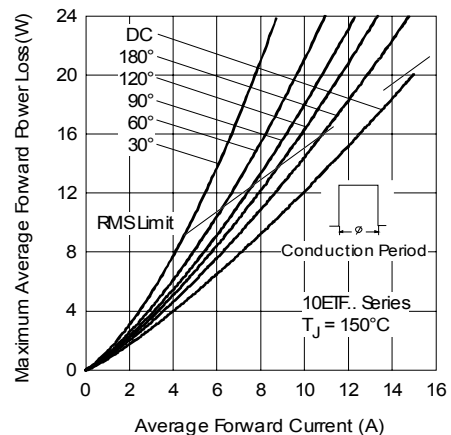


Fig. 4 - Forward Power Loss Characteristics

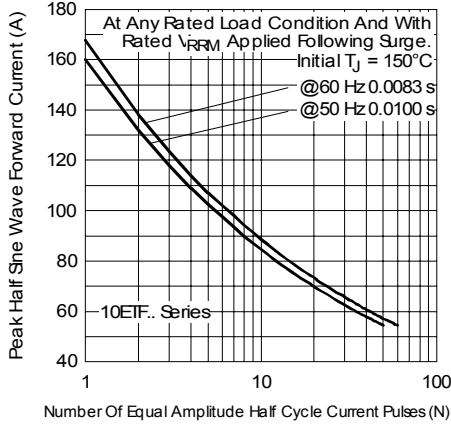


Fig. 5 - Maximum Non-Repetitive Surge Current

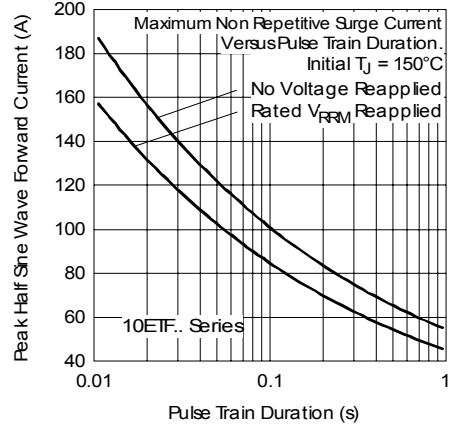


Fig. 6 - Maximum Non-Repetitive Surge Current

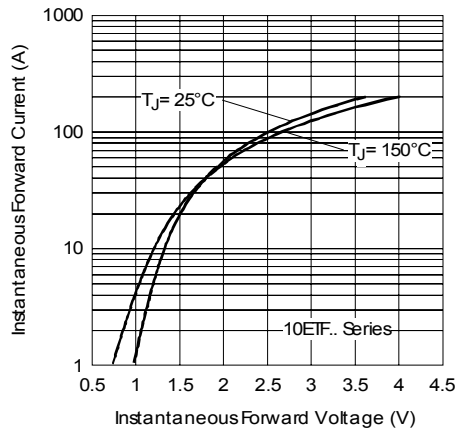


Fig. 7 - Forward Voltage Drop Characteristics

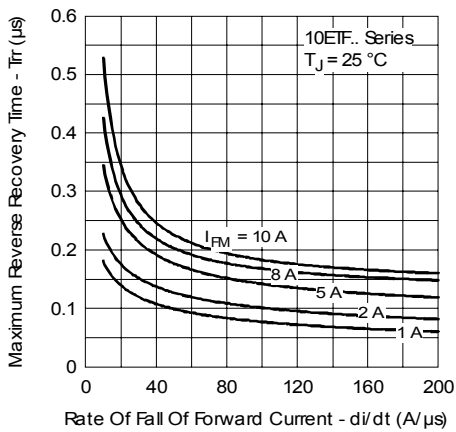


Fig. 8 - Recovery Time Characteristics,  $T_J = 25^\circ\text{C}$

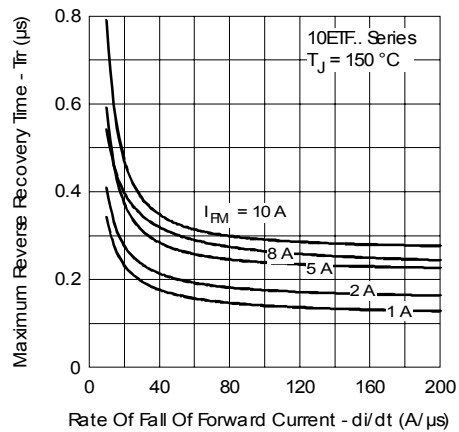


Fig. 9 - Recovery Time Characteristics,  $T_J = 150^\circ\text{C}$

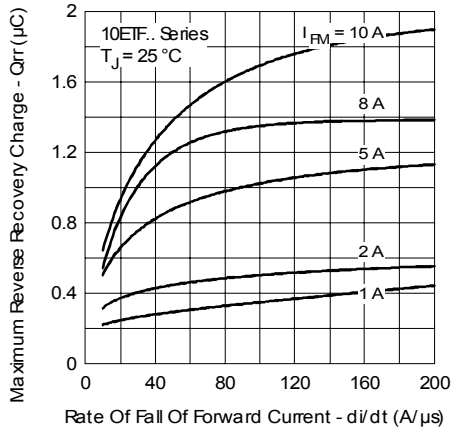


Fig. 10 - Recovery Charge Characteristics,  $T_J = 25^\circ\text{C}$

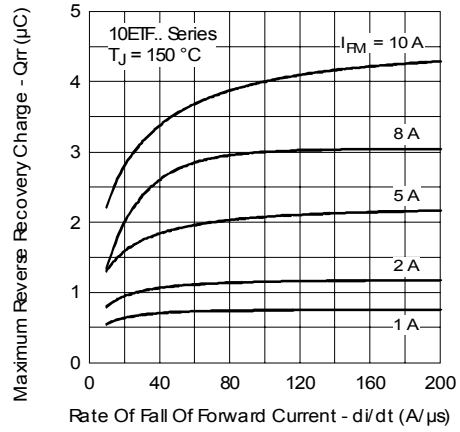


Fig. 11 - Recovery Charge Characteristics,  $T_J = 150^\circ\text{C}$

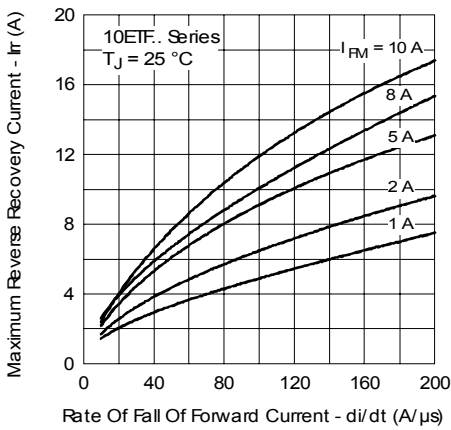


Fig. 12 - Recovery Current Characteristics,  $T_J = 25^\circ\text{C}$

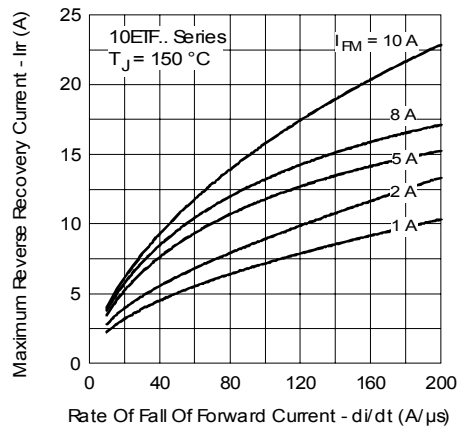


Fig. 13 - Recovery Current Characteristics,  $T_J = 150^\circ\text{C}$



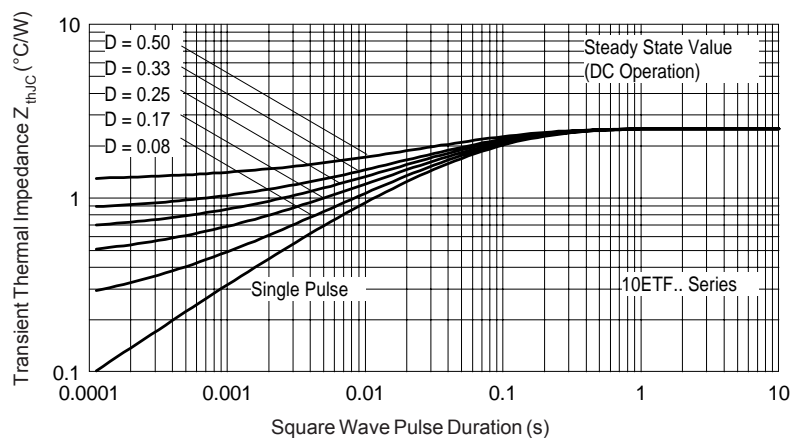


Fig. 14 - Thermal Impedance  $Z_{thJC}$  Characteristics

Outline Table

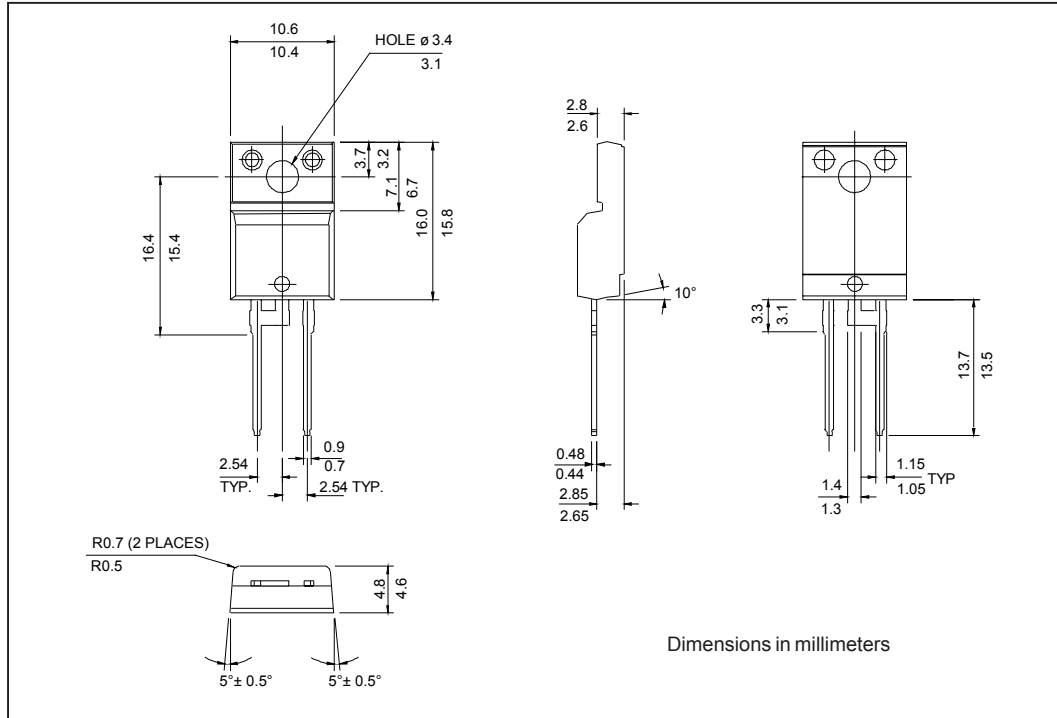

Ordering Information Table

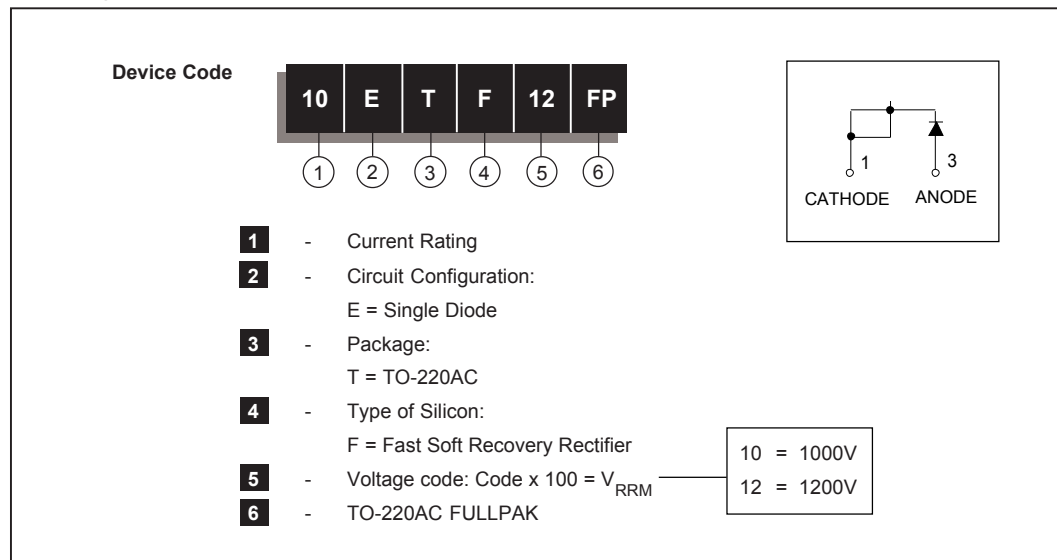

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level.  
Qualification Standards can be found on IR's Web site.

International  
**IOR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 06/03