

# Type: CEE158


## Product Description

- 15.5×13.3mm Max.(L×W), 9.0mm Max. Height.
- · Custom design is available.


#### ◆ Feature

- Max. Operating frequency 1MHz, Max. Operating Power 9.3W (500kHz).
- Ideally used in LCD TV, Note PC, Portable equipment and for PoE applications.
- RoHS Compliance

#### ◆ Dimensions (mm)

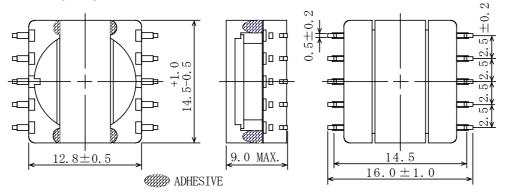


### ◆ Land Pattern (mm)



#### 1. For General Power Transformer Use


### **♦** Schematics (Bottom)



"S" indicates winding start.

#### 2.For PoE Applications

# ◆ Schematics (Bottom)



"o" indicates winding start.



# Type: CEE158

# ◆ Specification (For General Transformer use)

Sample No.	Inductance(1-4)	D.C.R. 1-4)	Hi-pot	
	(1kHz/1.0V)	(Ω Max.)	(1,4-6,7,9,10)	
1334-T074	90.5 μ H±25%	360	DC 100V/1min.	

# ◆ Specification (For PoE Applications)

Sample No.	Inductance (2-3) 100kHz/0.1V	D.C.R.(2-3) (m Ω Max.)	Leakage Inductance(2-3) 100kHz/0.1V	Turns ratio (2-3):(7-9):(4-5)	Hi-pot (2,3,4,5-7,9)
PS05-039	<b>169</b> μ H ± <b>15</b> %	600	5.0 µ H Max.	1:0.115:0.269	DC1500V/1s