

Spezifikation für Freigabe / specification for release

Kunde / customer :

Artikelnummer / part number : **7446221012**

LF




Bezeichnung : **STROMKOMPENSIERTE DROSSEL WE-LF**
 description : **CURRENT-COMPENSATED CHOKE WE-LF**

WÜRTH ELEKTRONIK

DATUM / DATE : 2012-08-07

A Mechanische Abmessungen / dimensions:

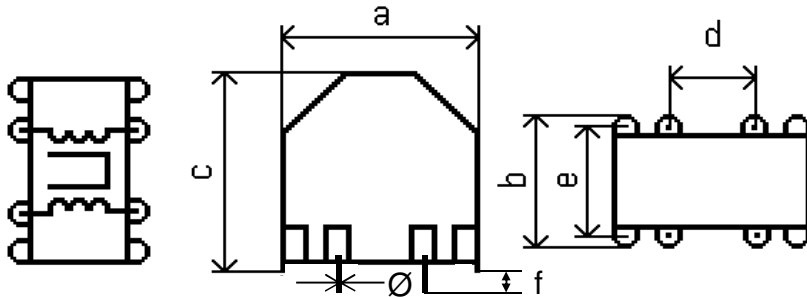

| Gehäuse / case: MV | | |
|--------------------|----------------------|----|
| a | 23,5 max | mm |
| b | 16,0 max | mm |
| c | 25,5 max | mm |
| d | 10,0 ± 0,2 | mm |
| e | 12,5 ± 0,2 | mm |
| f | 3,0 ± 0,5 | mm |
| Ø | 0,6 x 0,6 typ | mm |

B Elektrische Eigenschaften / electrical properties:

C Lötpad / soldering spec.:

| Eigenschaften / properties | Testbedingungen / test conditions | | Wert / value | Einheit / unit | tol. |
|------------------------------------|-----------------------------------|----------|--------------|----------------|-------------|
| Leerlauf-Induktivität / inductance | 10 kHz / 50 mV / 25 °C | L_0 | 12.0 | mH | ±30% |
| DC-Widerstand / DC-resistance | | R_{DC} | 0.280 | Ω | max. |
| Nennstrom / nominal current | | I_N | 1.2 | A | |
| Nennspannung / nominal voltage | 50 Hz | U_N | 250 | V | |

C Lötpad / soldering spec.:

D Prüfgeräte / test equipment:

E Testbedingungen / test conditions:

| | | |
|--|------------------------------------|---------------|
| FLUKE PM 6306 für/for L_0/L_N | Luftfeuchtigkeit / humidity: | 33% |
| HP 34401 A für/for I_N und/and R_{DC} | Umgebungstemperatur / temperature: | +25 °C |
| | Prüfspannung / testing voltage | 1500 V, 50 Hz |

F Werkstoffe & Zulassungen / material & approvals:

G Eigenschaften / general specifications:

| | | | |
|-------------------|----------------|--|-------------------|
| Gehäuse / case: | UL94V-0 | Klimabeständigkeit/ climatic class: | 40/125/21 |
| Draht / wire: | P155 IEC317-20 | Betriebstemp. / operating temperature: | -40 °C - + 125 °C |
| Verguß / molding: | UL94V-0 | Übertemperatur / temperature rise: | < 55 K |
| | | It is recommended that the temperature of the part does not exceed 125 °C under worst case operating conditions. | |

| Freigabe erteilt / general release: | Kunde / customer | | |
|-------------------------------------|--------------------------|------|--------------------------------------|
| | | | |
| Datum / date | Unterschrift / signature | HasA | Version 4 12-08-07 |
| | Würth Elektronik | MST | Version 3 05-11-22 |
| | | MST | Version 2 04-01-18 |
| | | MST | Version 1 04-10-11 |
| Geprüft / checked | Kontrolliert / approved | Name | Änderung / modification Datum / date |

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 - 3 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400
<http://www.we-online.com>