



**MBR30...CT**  
**MBRB30...CT**  
**MBR30...CT-1**

**SCHOTTKY RECTIFIER**

**30 Amp**

**Major Ratings and Characteristics**

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform (Per Device)	30	A
$I_{FRM}$ @ $T_C = 123^\circ\text{C}$ (Per Leg)	30	A
$V_{RRM}$	35/45	V
$I_{FSM}$ @ $t_p = 5 \mu\text{s}$ sine	1020	A
$V_F$ @ 20 Apk, $T_J = 125^\circ\text{C}$	0.6	V
$T_J$ range	-65 to 150	$^\circ\text{C}$

**Description/ Features**

This center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to  $150^\circ\text{C}$  junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- $150^\circ\text{C}$   $T_J$  operation
- Center tap TO-220, D<sup>2</sup>Pak and TO-262 packages
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

**Case Styles**

MBR30..CT	MBRB30..CT	MBR30..CT-1
<p>Base Common Cathode</p> <p>TO-220</p>	<p>Base Common Cathode</p> <p>D<sup>2</sup>PAK</p>	<p>Base Common Cathode</p> <p>TO-262</p>

**Voltage Ratings**

Parameters	MBR3035CT MBRB3035CT MBR3035CT-1	MBR3045CT MBRB3045CT MBR3045CT-1
$V_R$ Max. DC Reverse Voltage (V)	35	45
$V_{RWM}$ Max. Working Peak Reverse Voltage (V)		

**Absolute Maximum Ratings**

Parameters	Values	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current (Per Leg) (Per Device)	15	A	@ $T_C = 123^\circ\text{C}$ , (Rated $V_R$ )
	30		
$I_{FRM}$ Peak Repetitive Forward Current (Per Leg)	30	A	Rated $V_R$ , square wave, 20kHz $T_C = 123^\circ\text{C}$
$I_{FSM}$ Non Repetitive Peak Surge Current	1020	A	5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse Following any rated load condition and with rated $V_{RWM}$ applied Surge applied at rated load conditions halfwave, single phase, 60Hz
	200		
$E_{AS}$ Non-Repetitive Avalanche Energy	10	mJ	(Per Leg) $T_J = 25^\circ\text{C}$ , $I_{AS} = 2\text{Amps}$ , $L = 5\text{mH}$
$I_{AR}$ Repetitive Avalanche Current (Per Leg)	2	A	Current decaying linearly to zero in 1 $\mu\text{sec}$ Frequency limited by $T_J$ , max. $V_A = 1.5 \times V_R$ typical

**Electrical Specifications**

Parameters	Values	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop (1)	0.76	V	@ 30A $T_J = 25^\circ\text{C}$
	0.6	V	@ 20A $T_J = 125^\circ\text{C}$
	0.72	V	@ 30A $T_J = 125^\circ\text{C}$
$I_{RM}$ Max. Instantaneous Reverse Current (1)	1	mA	$T_J = 25^\circ\text{C}$ Rated DC voltage
	100	mA	$T_J = 125^\circ\text{C}$
$V_{F(TO)}$ Threshold Voltage	0.29	V	$T_J = T_J \text{ max.}$
$r_t$ Forward Slope Resistance	13.6	m $\Omega$	
$C_T$ Max. Junction Capacitance	800	pF	$V_R = 5V_{DC}$ , (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$
$L_S$ Typical Series Inductance	8.0	nH	Measured from top of terminal to mounting plane
dv/dt Max. Voltage Rate of Change	10000	V/ $\mu\text{s}$	(Rated $V_R$ )

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle <2%

**Thermal-Mechanical Specifications**

Parameters	Values	Units	Conditions
$T_J$ Max. Junction Temperature Range	-65 to 150	$^\circ\text{C}$	
$T_{stg}$ Max. Storage Temperature Range	-65 to 175	$^\circ\text{C}$	
$R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Leg)	1.5	$^\circ\text{C/W}$	DC operation
$R_{thCS}$ Typical Thermal Resistance Case to Heatsink	0.50	$^\circ\text{C/W}$	Mounting surface, smooth and greased Only for TO-220
$R_{thJA}$ Max. Thermal Resistance Junction to Ambient	50	$^\circ\text{C/W}$	DC operation For D <sup>2</sup> Pak and TO-262
wt Approximate Weight	2(0.07)	g(oz.)	
T Mounting Torque	Min. 6(5)	Kg-cm (lbf-in)	Non-lubricated threads
	Max. 12(10)		

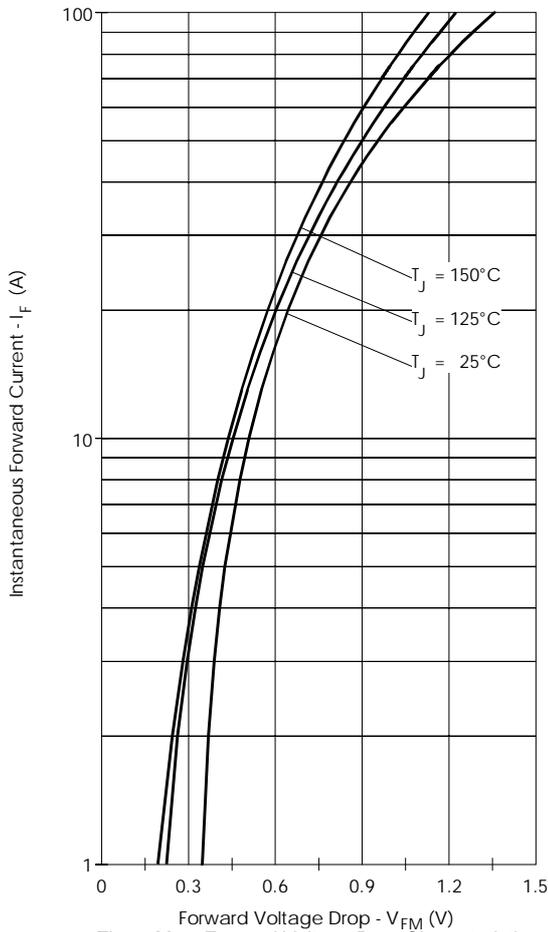


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

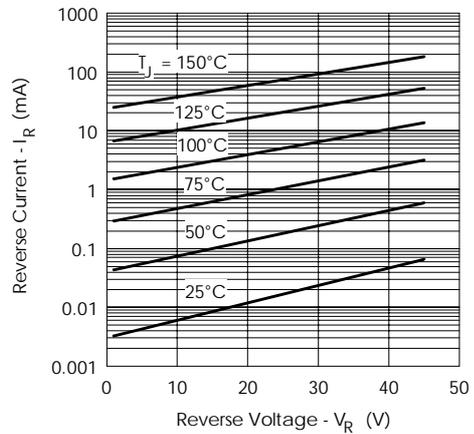


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

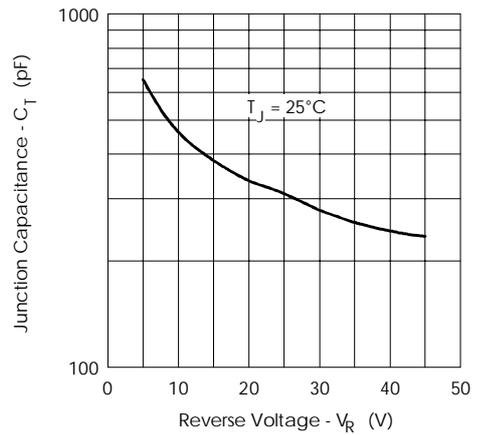


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

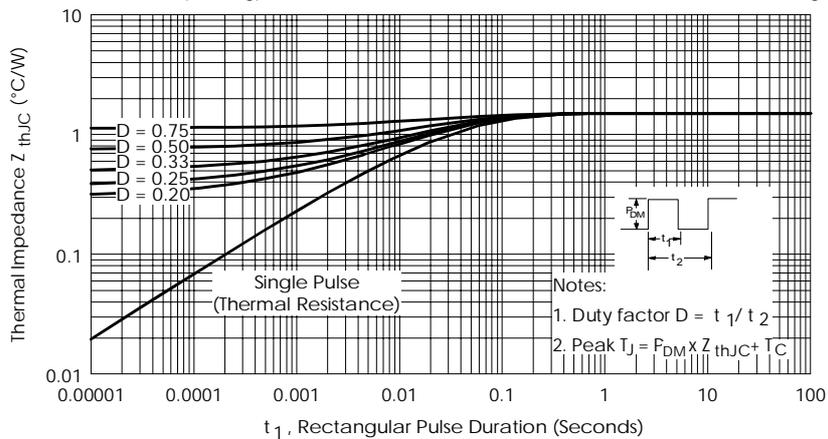


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

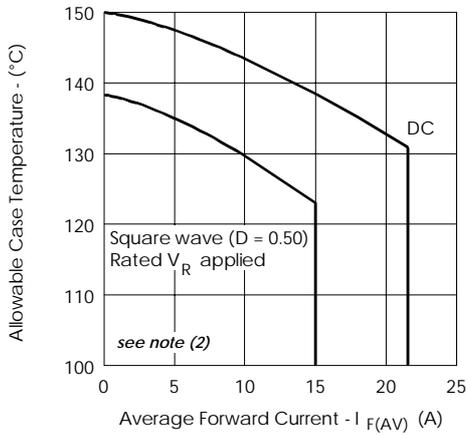


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

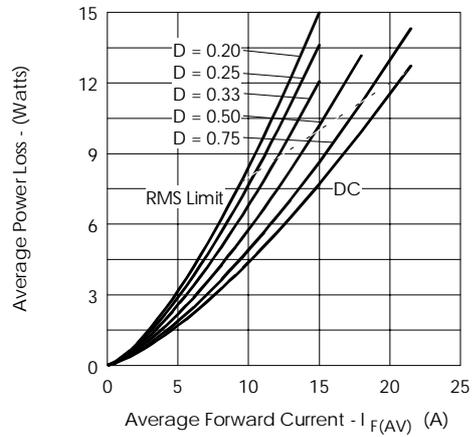


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

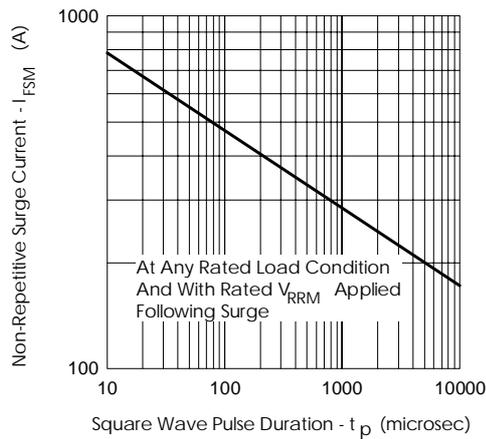


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

- (2) Formula used:  $T_c = T_j - (Pd + Pd_{REV}) \times R_{thJC}$ ;  
 $Pd$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)}/D)$  (see Fig. 6);  
 $Pd_{REV}$  = Inverse Power Loss =  $V_{R1} \times I_R (1 - D)$ ;  $I_R @ V_{R1}$  = rated  $V_R$

Ordering Information Table

<b>Device Code</b>					
<b>MBR</b>	<b>B</b>	<b>30</b>	<b>45</b>	<b>CT</b>	<b>-1</b>
①	②	③	④	⑤	⑥


<b>1</b>	- Essential Part Number
<b>2</b>	- B = Surface Mount None = TO-220
<b>3</b>	- Current Rating
<b>4</b>	- Voltage code: Code = $V_{RRM}$
<b>5</b>	- CT= Essential Part Number
<b>6</b>	- -1 = TO-262 None = TO-220

35	= 35V
45	= 45V


Outline Table

**Conform to JEDEC outline TO-220AB**  
 Dimensions in millimeters and (inches)


Outline Table

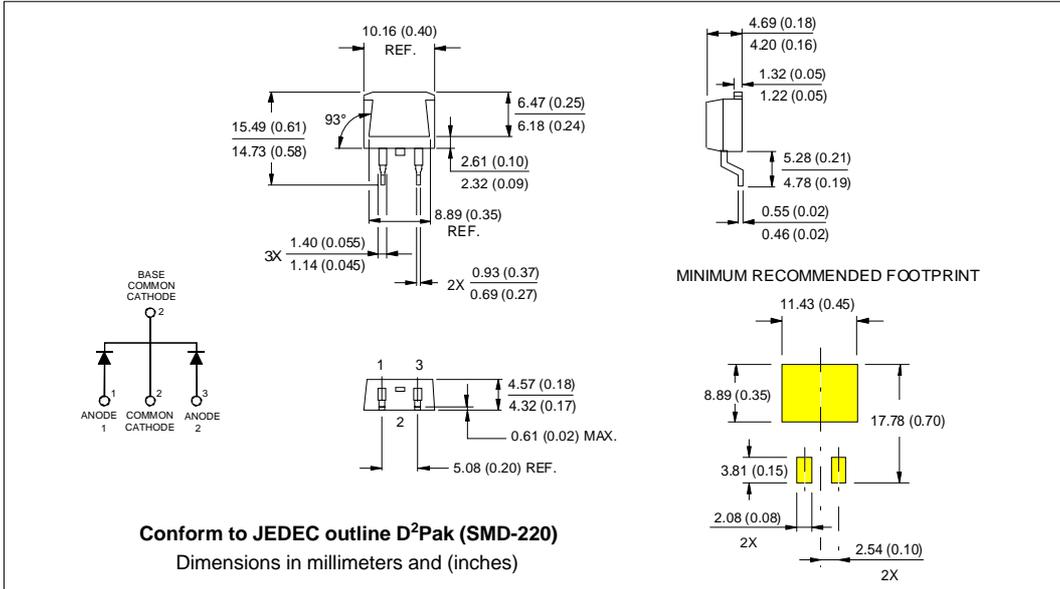

Tape & Reel Information

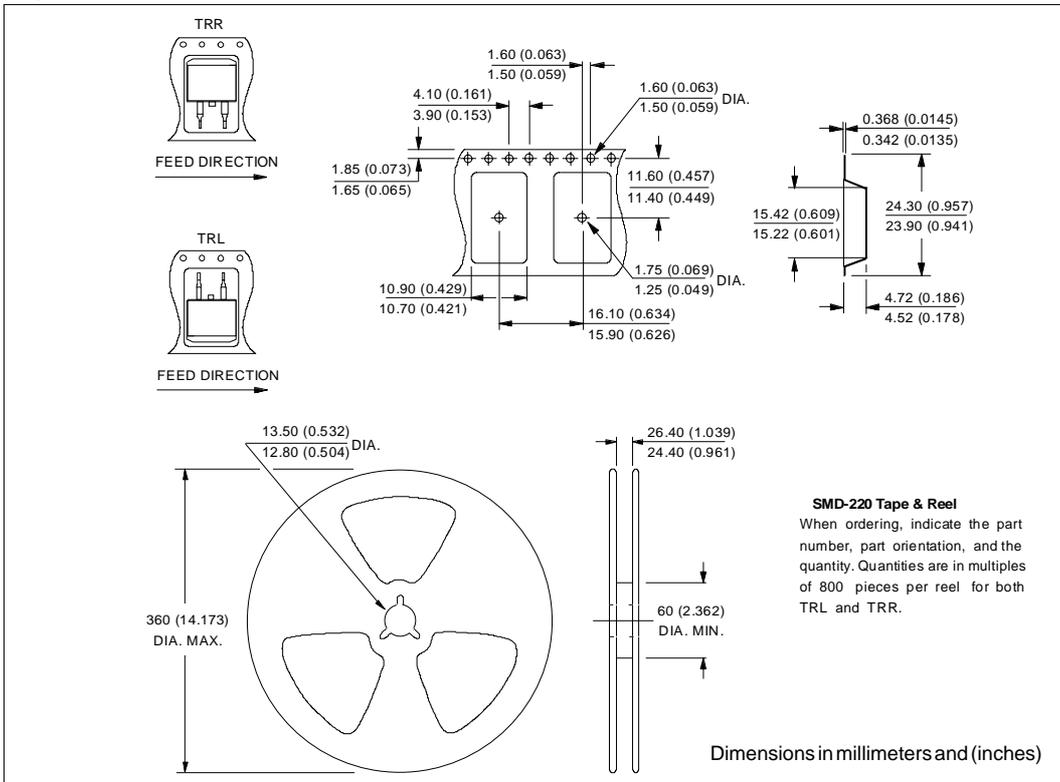

Outline Table

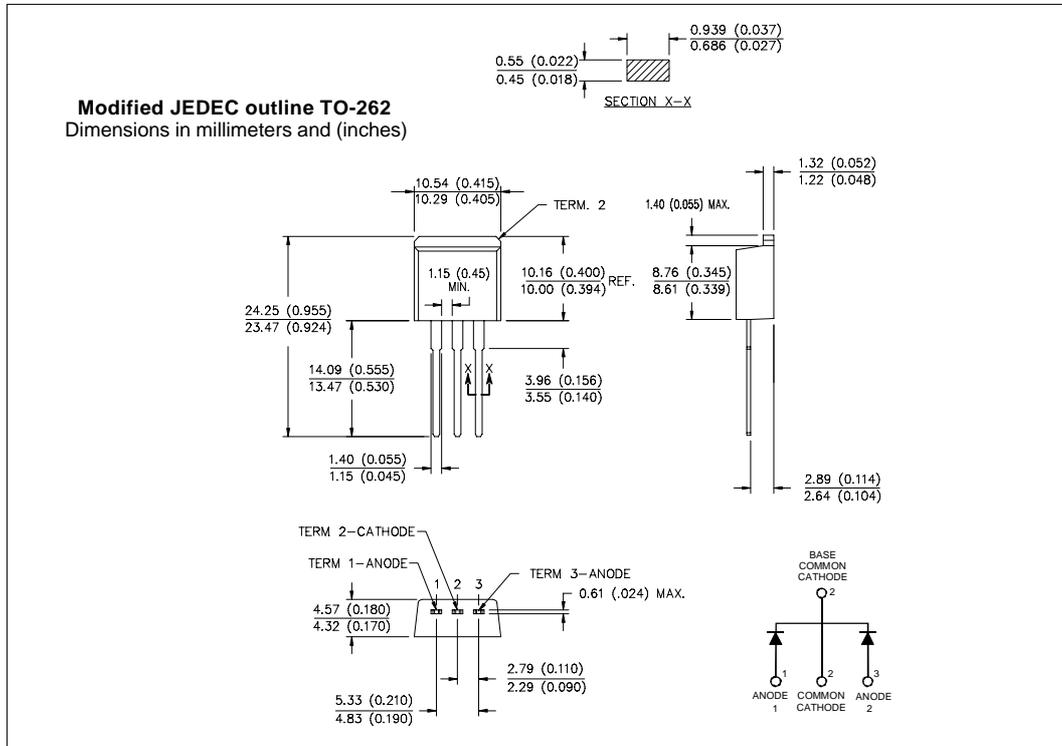

Data and specifications subject to change without notice.  
 This product has been designed and qualified for Industrial Level.  
 Qualification Standards can be found on IR's Web site.