


Description


The TOKO ASW52B is a wide-directivity, circularly polarized dielectric antenna specifically designed for 5.250 GHz applications including IEEE 802.11a wireless networking. The antenna unit consists of a dielectric element, printed circuit board, and RF connector.

Features

- Center Frequency: 5250 MHz
- Bandwidth: ± 100 MHz
- Miniature footprint: 19mm x 19mm
- Low profile: 6.5mm max.
- Peak Gain (Center Axial Direction): 4.0 dBi (typ.)
- SWR: 2.0 max.
- Impedance: 50 Ω
- Weight: 2.5 grams
- Operation temperature: - 20°C to + 85°C
- Storage temperature: - 30°C to + 90°C

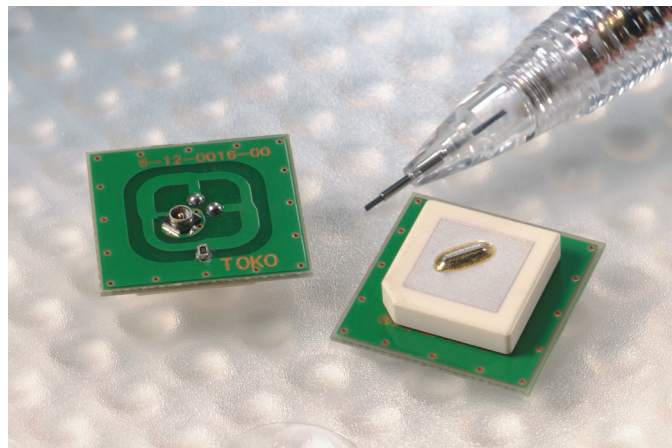


Dimensions

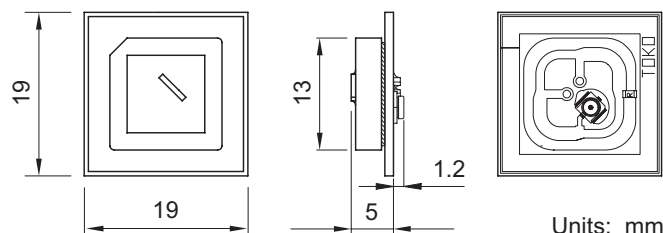


Typical Characteristics

Directivity Plot

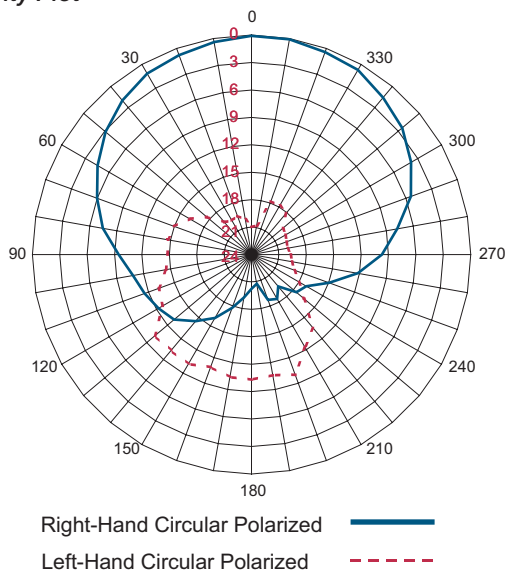

Receiving Signal Response Over Frequency

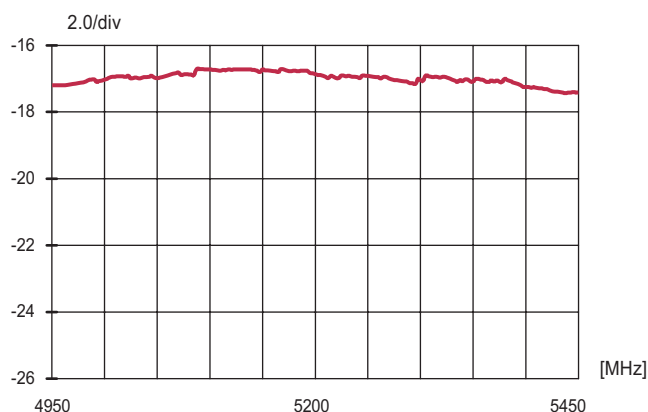

The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.