
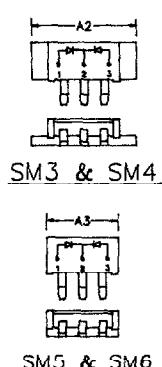


Schottky Power Surface Mount FST71SM1-SM6 Series

C

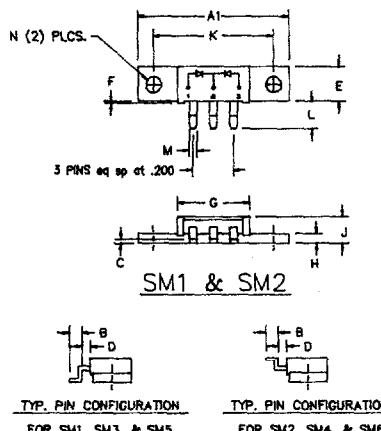

	Dim. Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A1	1.490	1.510	37.85	38.35	
A2	1.020	1.040	26.12	26.42	
A3	.695	.715	17.65	18.16	
B	.110	.120	2.79	3.04	
C	.027	.037	0.69	0.94	
D	.100	.110	2.54	2.79	
E	.350	.370	8.89	9.40	
F	.015	.025	0.38	0.64	
G	.695	.715	17.65	18.16	
H	.088	.098	2.24	2.49	
J	.240	.260	6.10	6.60	
K	1.180	1.195	29.97	30.35	
L	.230	.250	5.84	6.35	
M	.065	.085	1.65	2.16	
N	.151	.161	3.84	4.09	Dia.

TYP. PIN CONFIGURATION
FOR SM1, SM3, & SM5

TYP. PIN CONFIGURATION
FOR SM2, SM4, & SM6

Microsemi
Catalog Number

Working Peak
Reverse Voltage

Repetitive Peak
Reverse Voltage

FST7130SM ①②

30V

30V

FST7135SM --

35V

35V

FST7140SM --

40V

40V

FST7145SM --

45V

45V

Note: ① Specify (1-6) to identify package desired

② Specify C—Common Cathode, A—Common Anode, D—Doubler

- Schottky Barrier Rectifier
- Guard Ring for Reverse Protection
- V_{RRM} 30 to 45 Volts
- Low Forward Voltage
- 2 X 35 Amperes Avg.
- 150°C Junction Temperature
- Reverse Energy Tested

Electrical Characteristics

Average forward current per pkg

| F(AV) 70 Amps

TC = 90°C, Square wave, R_{θJC} = 0.6°C/W

Average forward current per leg

| F(AV) 35 Amps

TC = 90°C, Square wave, R_{θJC} = 1.2°C/W

Maximum surge current per leg

| F(SM) 800 Amps

8.3 ms, half sine, TJ = 150°C

Max repetitive peak reverse current per leg

| R(OV) 2 Amps

f = 1 KHZ, 25°C, 1 usec square wave

Max peak forward voltage per leg

| VM 0.50 Volts

| FM = 30A; TJ = 25°C*

Max peak forward voltage per leg

| RM 500 mA

| V_{RRM}, TC = 125°C*

Max peak reverse current per leg

| RM 5 mA

| V_{RRM}, TJ = 25°C

Typical reverse current per leg

| RM 1 mA

| V_{RRM}, TJ = 25°C

Typical junction capacitance

| CJ 1300 pF

| VR = 5.0V, TC = 25°C

*Pulse test: Pulse width 300 usec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range

| T_{STG}

-40°C to 150°C

Operating junction temp range

| TJ

-40°C to 150°C

Max thermal resistance per leg

| R_{θJC}

1.2°C/W Junction to case

per package

| R_{θJC}

0.6°C/W Junction to case

Typical thermal resistance per leg

| R_{θJC}

1.0°C/W Junction to case

Typical thermal resistance

| R_{θCS}

0.5°C/W Case to sink

Mounting Base Torque

| SM1-2

10 inch pounds maximum

Weight

| SM3-4

0.3 ounce (8.4 grams) typical

| SM5-6

0.24 ounce (6.7 grams) typical

| 0.18 ounce (5.2 grams) typical

FST71SM1 – SM6

Figure 1
Maximum Forward Characteristics – Per Leg

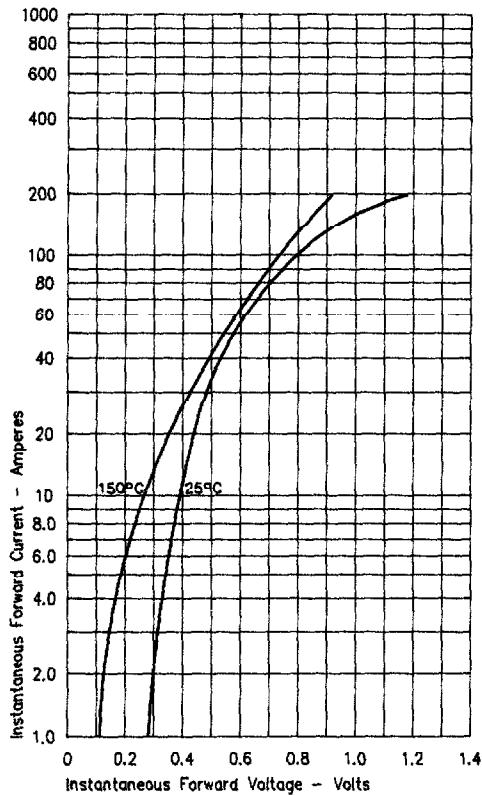


Figure 3
Typical Junction Capacitance – Per Leg

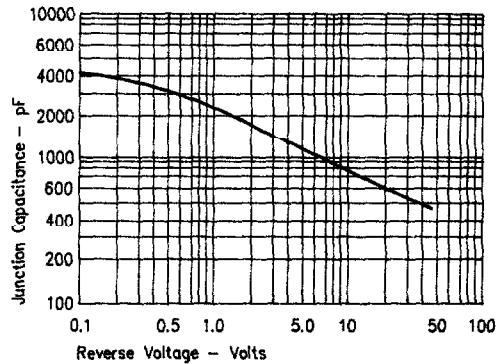


Figure 4
Forward Current Derating – Per Leg

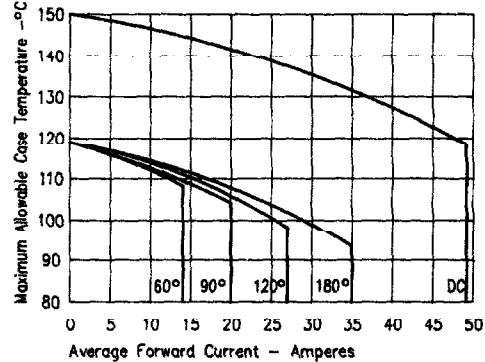


Figure 2
Typical Reverse Characteristics – Per Leg

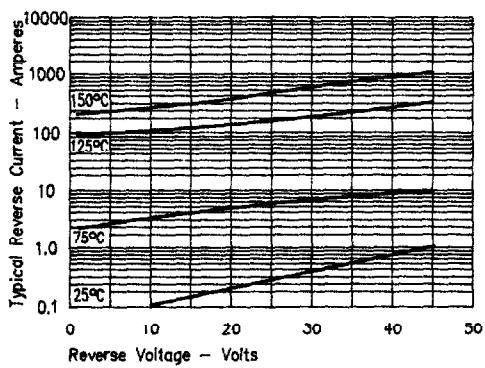


Figure 5
Maximum Forward Power Dissipation – Per Leg

