

## Small Integrated Transmitter Unit SITU2400-XZ

*0.05 – 1 GHz, ITU-Grid DWDM Directly Modulated Self-Contained Transmitter*



### Applications

- Cellular and PCS Antenna-Remoting
- Microwave Delay Lines
- Frequency Distribution Systems
- Radar System Calibration
- Phased Array Antenna Systems

### Features

- Wavelength-specific operation for multi-channel DWDM systems
- Integrated high-powered 1550 nm DFB laser and bias control circuitry - Only DC input voltages and RF input required
- High Dynamic Range

The Emcore Small Integrated Transmitter Unit (SITU2400) is a high-performance, directly modulated transmitter for applications with guaranteed performance over the 0.05 to 1 GHz frequency band. The SITU2400-XZ is a fully integrated unit that contains both the optics and the control electronics. Only DC input voltages and the RF input signal are required for operation.

The unit can be used to construct transparent optical links for antenna remoting, microwave delay lines and other applications where it is necessary to transport RF over long distances without signal degradation.

The unit operates at ITU wavelengths for CWDM and DWDM applications.

### Specifications

#### Electrical

Frequency Range	0.05 - 1 GHz
RF Input Power	-30 to +12 dBm
Power Requirements	+15 V @ 0.25 A max
RF Connector	SMA (female)
2 <sup>nd</sup> Harmonics (@ 0 dBm RF input)	< -35 dBc
Input IP1 (1 dB Compression Point)	+12 dBm
Input IP3 (3 <sup>rd</sup> Order Intercept)	+24 dBm
Noise Figure	48 dB
RF Input Impedance	50 $\Omega$
RF Return Loss	9 dB

#### Optical

Wavelength	1527.99 -1563.05 nm, ITU specific
Optical Connector	FC/APC or SC/APC
Optical Output Power	+ 8 dBm Nominal

#### Physical

Configuration	Environmentally Sealed Unit
Dimensions	1.0" H x 5.0" W x 4.0" D
Operating/Storage Temperature	-20 °C to +70 °C


***For more information on this and other products:***

Contact Sales at Emcore 626-293-3400, or visit [www.emcore.com](http://www.emcore.com).

## Performance Characteristics (SITU2400-XZ Transmitter and SIRU2300-XZ Receiver)

Parameter	Symbol	Frequency (GHz)	Unit
Frequency Range	BW	.05 - 1	GHz
RF Input Level	RF <sub>in</sub>		
Minimum		-46	dBm
Maximum		-30	
Link Gain	G		
Minimum		-46	dB
Maximum		-30	
Amplitude RF Flatness, Peak-to-Peak		3	dB
Link Noise Figure, Maximum	NF	48	dB
1 dB Compression Point, Minimum	P1dB	+12	dBm
Third Order Input Intercept Point, Minimum	IP3	+24	dBm
Return Loss, Minimum	S11	9	dB

## Package Outline Drawing

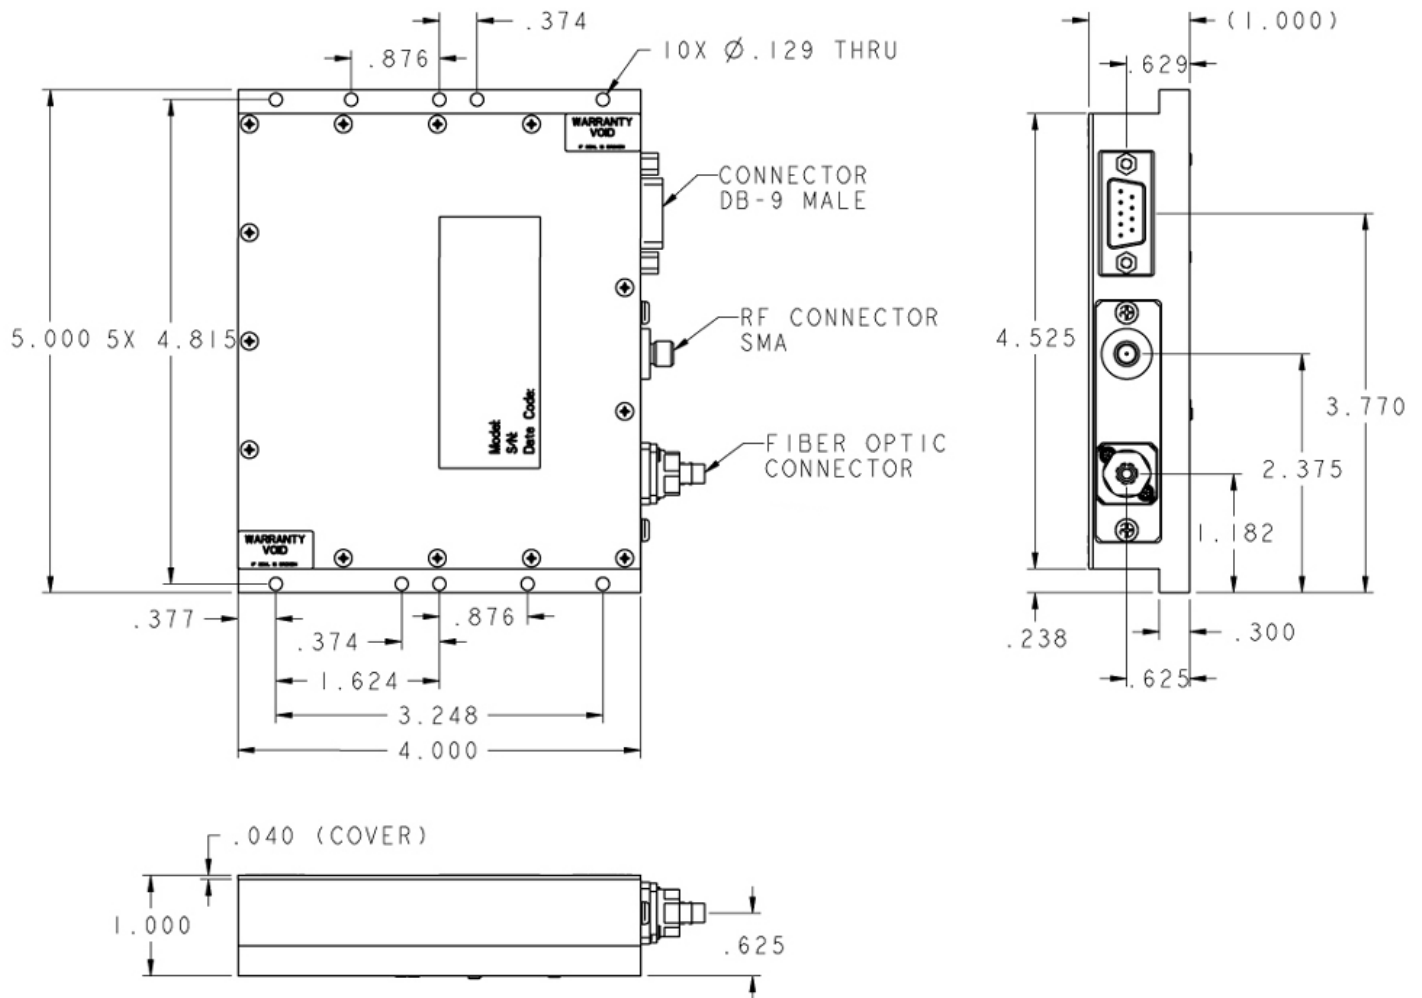

**For more information on this and other products:**

Contact Sales at Emcore 626-293-3400  
or visit [www.emcore.com](http://www.emcore.com).

**D-Connector Pin Out**

1	+15 V
2	n/c
3	n/c
4	GND
5	n/c
6	Optical Power Monitor
7	Low Power Alarm
8	n/c
9	n/c

---

***For more information on this and other products:***

Contact Sales at Emcore 626-293-3400  
or visit [www.emcore.com](http://www.emcore.com).

**Ordering Information**

SITU2400-XZ-YY

XZ = ITU Wavelength

YY = Optical Connector: FC=FC/APC, SC=SC/APC

ITU Channel	Frequency (THz)	Wavelength (nm)
62	196.2	1527.99
61	196.1	1528.77
60	196.0	1529.55
59	195.9	1530.33
58	195.8	1531.12
57	195.7	1531.90
56	195.6	1532.68
55	195.5	1533.47
54	195.4	1534.25
53	195.3	1535.04
52	195.2	1535.82
51	195.1	1536.61
50	195.0	1537.40
49	194.9	1538.19
48	194.8	1538.98
47	194.7	1539.77
46	194.6	1540.56
45	194.5	1541.35
44	194.4	1542.14
43	194.3	1542.94
42	194.2	1543.73
41	194.1	1544.53
40	194.0	1545.32

ITU Channel	Frequency (THz)	Wavelength (nm)
39	193.9	1546.12
38	193.8	1546.92
37	193.7	1547.72
36	193.6	1548.51
35	193.5	1549.32
34	193.4	1550.12
33	193.3	1550.92
32	193.2	1551.72
31	193.1	1552.52
30	193.0	1553.33
29	192.9	1554.13
28	192.8	1554.94
27	192.7	1555.75
26	192.6	1556.56
25	192.5	1557.36
24	192.4	1558.17
23	192.3	1558.98
22	192.2	1559.79
21	192.1	1560.61
20	192.0	1561.42
19	191.9	1562.23
18	191.8	1563.05

***For more information on this and other products:***Contact Sales at Emcore 626-293-3400  
or visit [www.emcore.com](http://www.emcore.com).

## Laser Safety


### Class IIIb Laser Product

FDA/CDRH Class IIIb laser product. All transmitter versions are Class IIIB laser products per CDRH, 21 CFR 2040 Laser Safety requirements. All versions are Class 3B laser products per IEC\*60825-1:1993.

Maximum Power = 10 dBm

**Caution: Use of controls, adjustments and procedures other than those specified herein may result in hazardous laser radiation exposure.**

\*IEC is a registered trademark of the International Electrotechnical Commission.

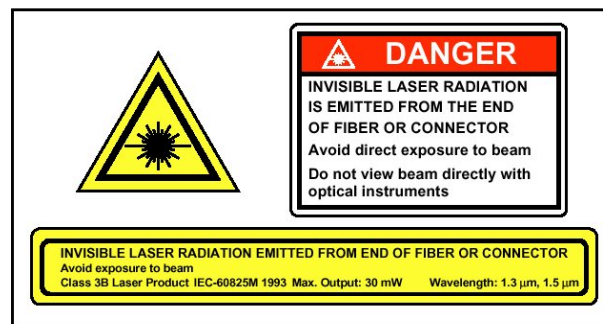

Information contained herein is deemed to be reliable and accurate as of issue date. EMCORE reserves the right to change the design or specifications of the product at any time without notice. Ortel, the Ortel logo, EMCORE, and the EMCORE logo are trademarks of EMCORE Corporation.

### EMCORE

2015 West Chestnut Street  
Alhambra, California 91803-1542  
Tel: 626-293-3400  
Fax: 626-293-3428  
[www.emcore.com](http://www.emcore.com)

### *For more information on this and other products:*

Contact Sales at Emcore 626-293-3400  
or visit [www.emcore.com](http://www.emcore.com).



© Copyright 2010, Emcore Corporation