


### DESCRIPTION :

This DC to AC Inverter was developed for notebook computer and many other low LCD Backlight power supply as low profile applications, either for Note Book PC or Industrial.

Applicable LCD; 10 to 12 inches single lamp type  
 Lamp Voltage 600V  
 Lamp Current 6mA

### FEATURES :


- Current Feedback Circuit
- High Efficiency
- Low noise with voltage resonant circuit
- Regulated output current

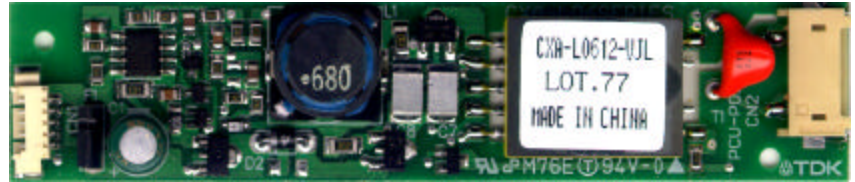

### TEMPERATURE & HUMIDITY :

Operating Temperature Range 0 °C ~ +50 °C  
 Storage Temperature Range -30 °C ~ +85 °C  
 Humidity 95 %RH max  
 95.5 max

### DIMENSIONS :

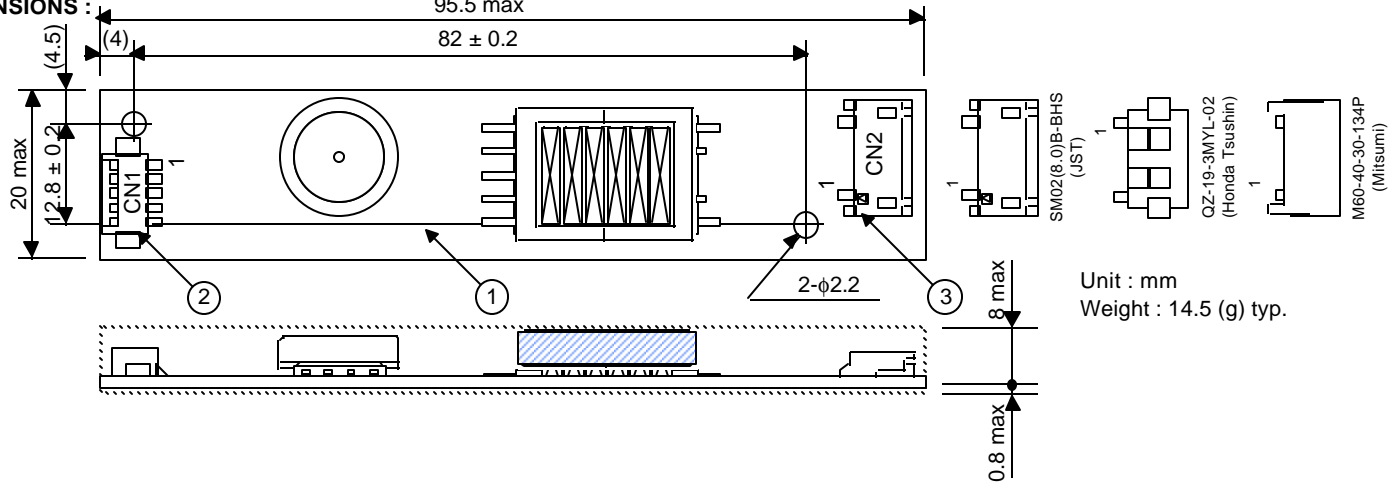

No.	Part Description	Qty.	Note	Item
1	PWB	1	UL94V-0 t=1mm	
2	Connector CN1	1	53261-0510 (Molex)	
3	Connector CN2	1	SM02(8.0)B-BHS (JST)	CXA-L0612-VJR, CXA-L0612-VJL
			QZ-19-3MYL-02 (Honda)	CXA-L0612-VHR, CXA-L0612-VHL
			M60-40-30-134P (Mitsumi)	CXA-L0612-VMR, CXA-L0612-VML

CN1 : 53261-0510 (Molex)

Pin	Symbol	Note
CN1-1	Vin	8 ~ 16 Vdc
CN1-2	GND	0 Vdc
CN1-3	Vrmt	0 / 5~15 Vdc (H active)
CN1-4	Vbr	0 ~3 Vdc
CN1-5	N.C.	

CXA-L0612-VJR

CN2 : SM02(8.0)B-BHS (JST)

Pin	Symbol	Note
CN2-1	lout-ret	(2V)
CN2-2	N.C.	
CN2-3	lout	2~6mArms


CXA-L0612-VJL

CN2 : SM02(8.0)B-BHS (JST)

Pin	Symbol	Note
CN2-1	lout	2~6mArms
CN2-2	N.C.	
CN2-3	lout-ret	(2V)


General Information Tel : (03) 5201-7229 (Japan)  
 Tel : (847) 390-4454 (USA)  
 Technical Information Tel : (473) 78-9664 (Japan)  
 Tel : (847) 699-2299 (USA)

All specification are subject to change without notice.




**ELECTRICAL CHARACTERISTICS :**

Parameter	Symbol	Conditions				Specifications			Unit	Note
		V <sub>in</sub> (V)	V <sub>br</sub> (V)	T <sub>a</sub> (°C)	R <sub>L</sub> (kΩ)	min.	typ.	max.		
Output Current	I <sub>out</sub>	10 ~ 15	0	0 ~ 50	90 ~ 110	5.4	6.0	6.6	mA <sub>rms</sub>	Max. Brightness
		12	3	23 ± 5	100	5.4	6.0	6.6		Min. Brightness
Input Current	I <sub>in</sub>				90 ~ 110	-	0.4	0.73	Adc	
Frequency	FL	10 ~ 15	0 ~ 3	0 ~ 50		35	45	55	kHz	
Open Voltage	V <sub>open</sub>				∞	1300	1500	-	V <sub>rms</sub>	

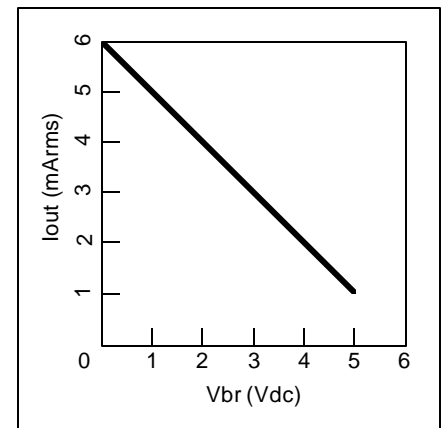


**APPLICATION (for example)**


**Voltage Dimming Type**

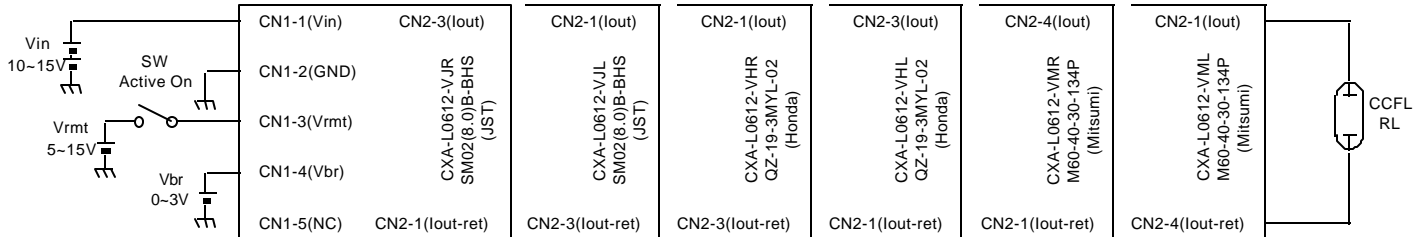

**Resistor Dimming Type**

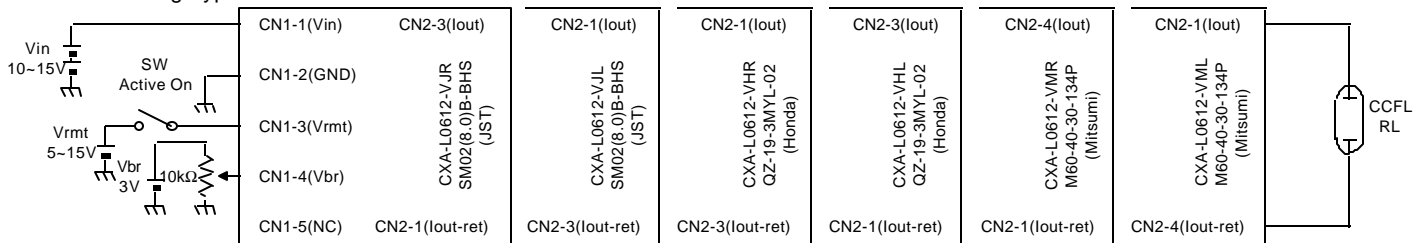

**None Dimming Type**

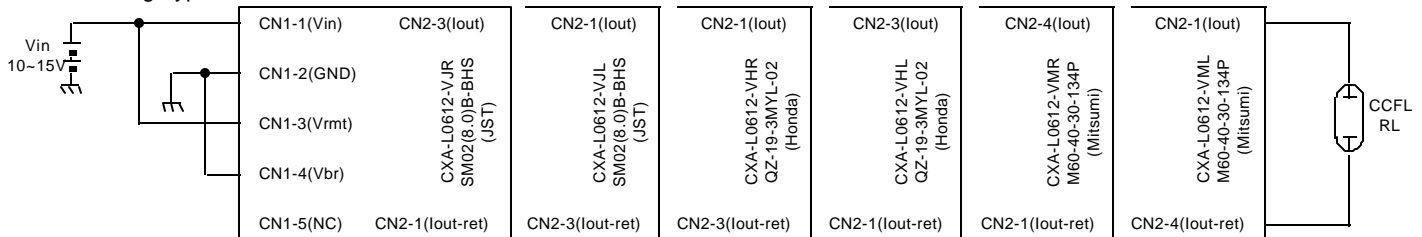

General Information Tel : (03) 5201-7229  
 Tel : (847) 390-4454  
 Technical Information Tel : (473) 78-9664  
 Tel : (847) 699-2299

(Japan)  
 (USA)  
 (Japan)  
 (USA)

All specification are subject to change without notice.