

KB464AR61 (KLB-521 R)**1. Descriptions**

KB464AR61 (KLB-521 R) is a high bright AlInGaP red LED and has the optimized optical characteristics.

2. Features


- ◆ Transparent epoxy lens
- ◆ High Optical Output
- ◆ Typical Luminous Intensity(IV)
: 1.0cd for Red @ IF=20mA

3. Application

- ◆ Display
- ◆ Indicator
- ◆ Signage
- ◆ Auto Focus
- ◆ Amusement

4. Outline Dimensions and Material Descriptions

- ◆ Outline Dimensions

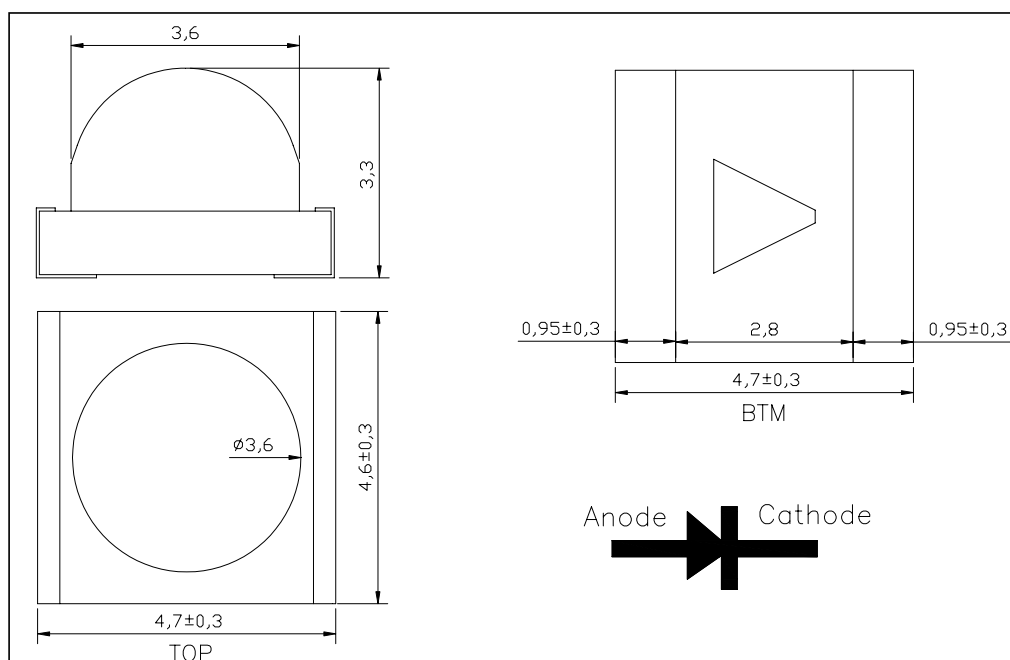

The contents of this data sheet are subject to change without advance notice for the purpose of improvement.
When using this product, would you please refer to the latest specifications.

KB464AR61 (KLB-521 R)**5. Absolute Maximums**

[Ta=25°C]

Parameter	Symbol	Ratings	Unit
Reverse voltage	V_R	5	V
Forward current	I_F	30	mA
Pulse forward current *1	I_{FP}	0.3	A
Power dissipation	P_D	70	mW
Operating temperature	$T_{opr.}$	-30 ~ +85	°C
Storage temperature	$T_{stg.}$	-40 ~ +100	°C
Soldering Temperature	$T_{sol.}$	260	°C







*1. IFP Measured under duty $\frac{1}{100}$ @ $t_w=10ms$ **6. Electro-Optical Characteristics (T_A = 25°C)**

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage	V_F	$I_F = 20 \text{ mA}$		2.1	2.5	V
Reverse current	I_R	$V_R = 5 \text{ V}$	-	-	50	uA
Luminous Intensity	I_V	$I_F = 20 \text{ mA}$	0.7	1.0	-	cd
Doninant Wave Length	λ_D	$I_F = 20 \text{ mA}$	615	-	630	nm
Spectral half bandwidth	$\Delta\lambda$	$I_F = 20 \text{ mA}$	-	15	-	nm
Half angle	$2\Delta\theta_{1/2}$	$I_F = 20 \text{ mA}$	-	80	-	deg.

The contents of this data sheet are subject to change without advance notice for the purpose of improvement.
When using this product, would you please refer to the latest specifications.

KB464AR61 (KLB-521 R)

7. Characteristic Graphs

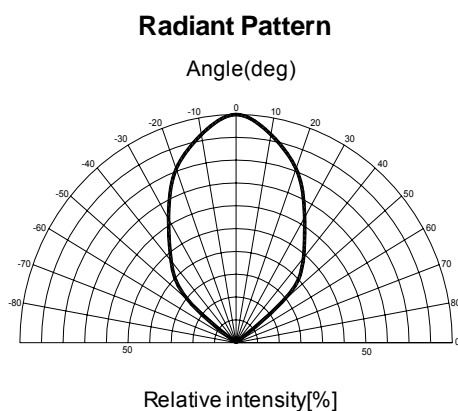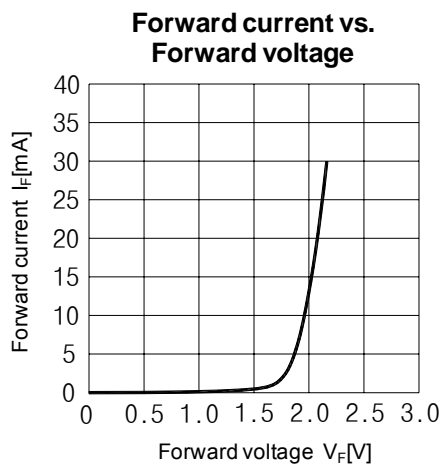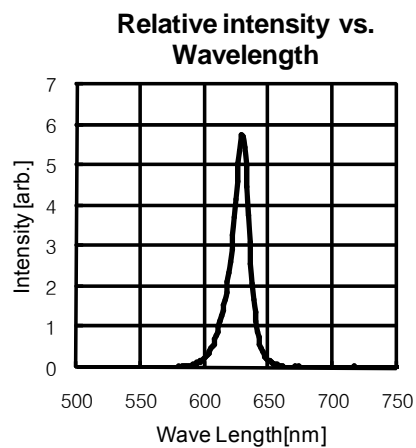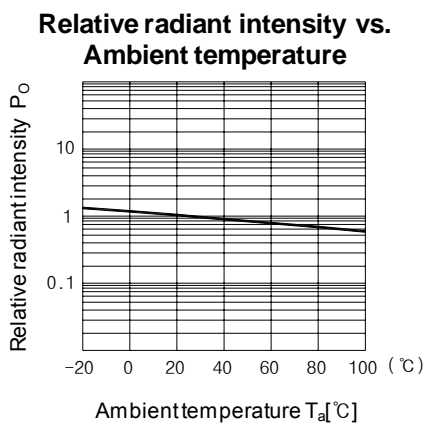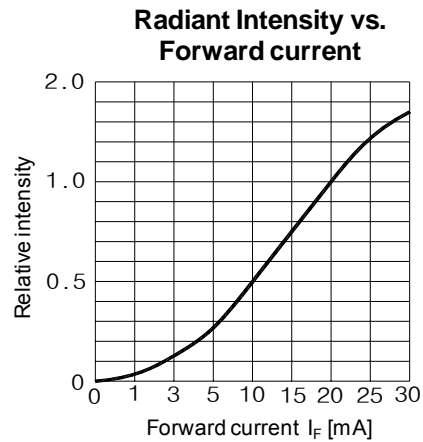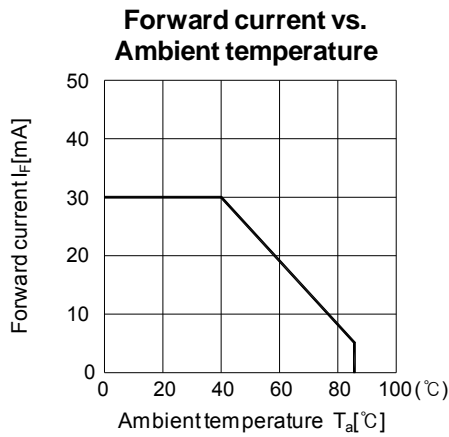

The contents of this data sheet are subject to change without advance notice for the purpose of improvement. When using this product, would you please refer to the latest specifications.