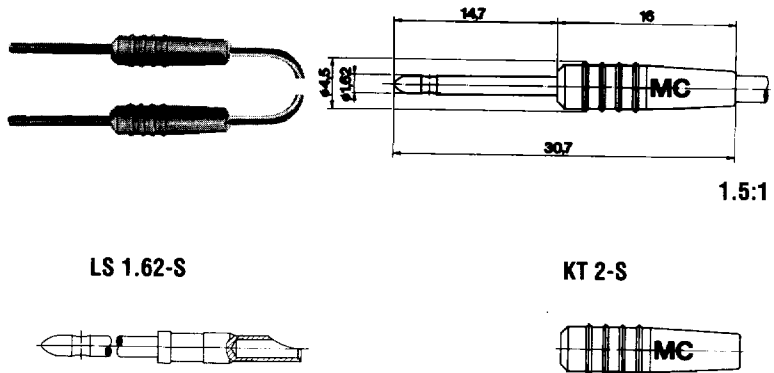


Nominal diameter	Withdraw. force	Rated current	Contact resistance	Type	Part No.
1.62 mm	—	10 A	—	LK 1.62-S	21.0760 (7.5 cm)
Highly flexible patch cord with 1.62 mm (.064 in) dia. pins. Matching all spring-loaded 1.62 mm (.064 in) sockets and jacks. Pin machined brass, gold plated.					21.0770 (15 cm)
Components and ratings:					21.0780 (30 cm)
• Pin LS 1.62-S # 22.5102					21.0790 (45 cm)
• Insulator (polyamide) KT 2-S # 22.2010					
• Wire HK 0.5 PVC # 22.0010					
• Operating temperature: - 10°C to + 70°C (14°F to 158°F)					
Colors: 1 - 9					
					
					1.5:1
					2:1
0 - green/yellow 1 - red 2 - blue 3 - white 4 - black 5 - yellow 6 - green 7 - brown 8 - gray 9 - violet					