


1.00mm Pitch

Series 6227




LIF Right Angle SMT (Dual Sided Contact)

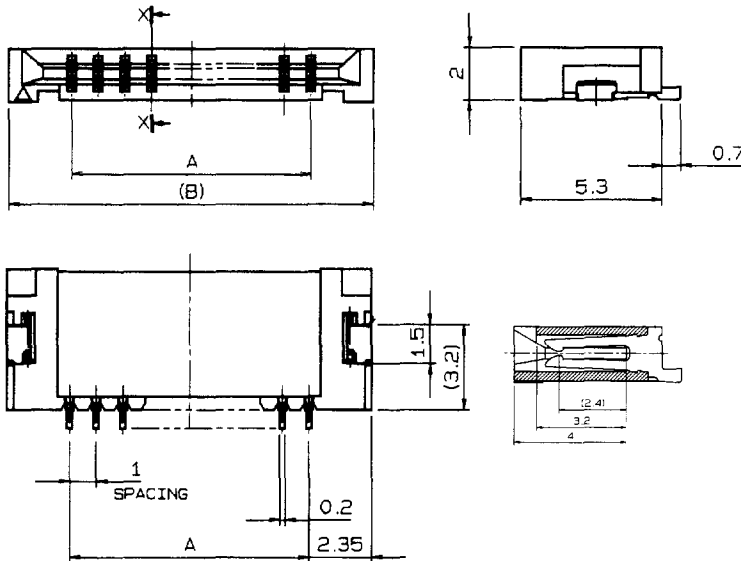


Specifications

- Number of Contacts – 4-20
- 1000 Connectors per Tape & Reel
- Voltage – 50 V
- Current Rating – 1.0 amp max.
- Dielectric Withstanding Voltage – 500V RMS min.
- Operating Temperature – (-40°C - +85°C)
- Contact & Metal Tab Material – phosphor bronze (tin-lead plated)
- Insulator Material – nylon 46, natural color (UL 94 V-O)
- FFC/FPC Thickness – 0.3 ±0.05 mm (0.012 ±0.002")
- Profile Height – 2.00mm

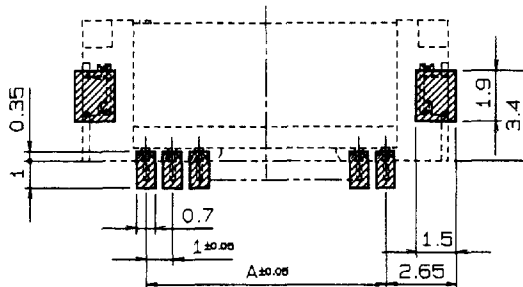

MOUNTING LAYOUT

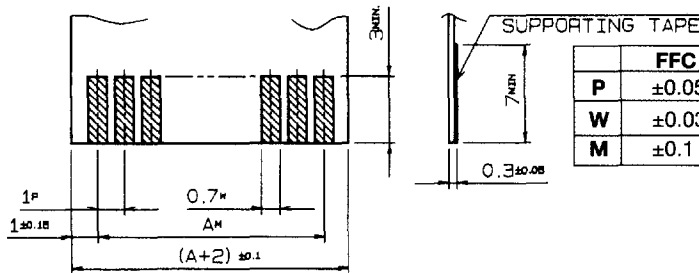

FFC, FPC SPECIFICATION

	FFC	FPC
P	±0.05	±0.02
W	±0.03	+0.07 -0.05
M	±0.1	±0.05

PART NUMBER	NO. OF CONTACTS	A	B	QTY. PER TRAY
04 6227 004 100 800	4	3.0	7.7	1000
005	5	4.0	8.7	1000
006	6	5.0	9.7	1000
007	7	6.0	10.7	1000
008	8	7.0	11.7	1000
009	9	8.0	12.7	1000
010	10	9.0	13.7	1000
011	11	10.0	14.7	1000
012	12	11.0	15.7	1000
013	13	12.0	16.7	1000
014	14	13.0	17.7	1000
015	15	14.0	18.7	1000
016	16	15.0	19.7	1000
017	17	16.0	20.7	1000
018	18	17.0	21.7	1000
019	19	18.0	22.7	1000
04 6227 020 100 800	20	19.0	23.7	1000

(Dimensions: mm)

ORDERING CODE

04 6227 0XX 100 800

NUMBER OF CONTACTS (04-20)

TAPE AND REEL

See page 43 for Tape and Reel detail.