

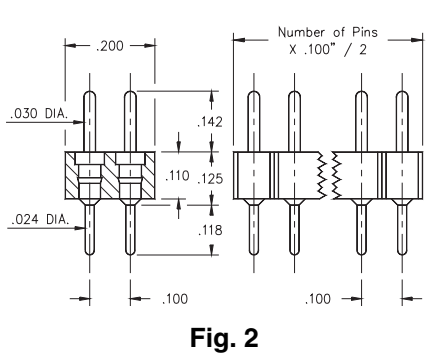


- Receptacles accept .030" diameter and .025" square pins.
- Pin headers use MM# 5016 pins. (See page 173 for details)
- Low profile sockets use MM# 1303 pins. (See page 148 for details)

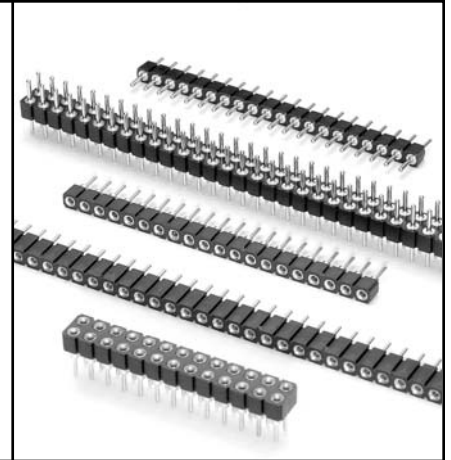


**Ordering Information**

<b>Fig. 1</b>	<b>Single Row</b>	<b>Low Profile Pin Header</b>
	800-XX-0 __ -10-002000	
	<b>Specify # of pins</b>	└───> 01-64
<b>Fig. 2</b>	<b>Double Row</b>	<b>Low Profile Pin Header</b>
	802-XX-0 __ -10-002000	
	<b>Specify # of pins</b>	└───> 02-64

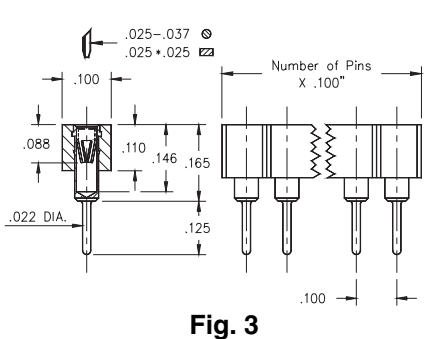


**RoHS 2002/95/EC** **XX= Plating Code See Below** *For RoHS compliance, select ◊ plating code. For the gold option (XX=10) also change part number from 80X-XX-0XX-10-002000 to 80X-10-0XX-10-002100*

SPECIFY PLATING CODE XX=	10 ◊	90	40 ◊	
Pin Plating	10μ" Au	200μ" Sn/Pb	200μ" Sn	

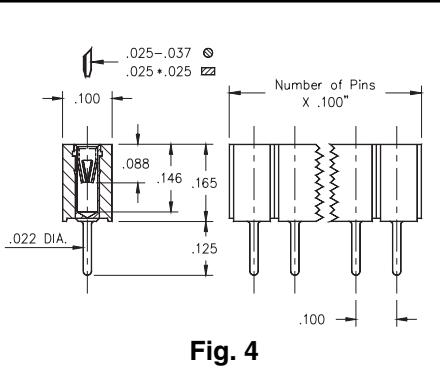

<b>Fig. 3</b>	<b>Single Row</b>	<b>Low Profile Socket (short insulator)</b>
	801-XX-0 __ -10-002000	
	<b>Specify # of pins</b>	└───> 01-64
<b>Fig. 4</b>	<b>Single Row</b>	<b>Low Profile Socket (long insulator)</b>
	801-XX-0 __ -10-012000	
	<b>Specify # of pins</b>	└───> 01-36

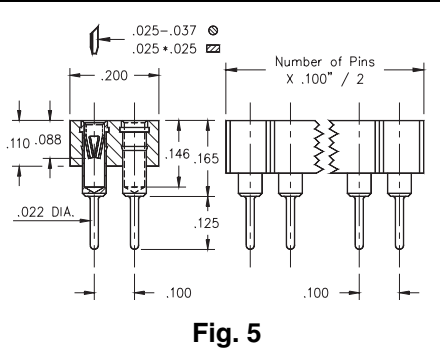

<b>Fig. 5</b>	<b>Double Row</b>	<b>Low Profile Socket</b>
	803-XX-0 __ -10-002000	
	<b>Specify # of pins</b>	└───> 02-72

**RoHS 2002/95/EC** **XX= Plating Code See Below** *For RoHS compliance, select ◊ plating code. For the all gold option (XX=13) also change part number from 80X-XX-0XX-10-0X2000 to 80X-13-0XX-10-0X2100*

SPECIFY PLATING CODE XX=	13 ◊	93	99	43 ◊	44 ◊
Sleeve (Pin)	10μ" Au	200μ" Sn/Pb	200μ" Sn/Pb	200μ" Sn	200μ" Sn
Contact (Clip)	30μ" Au	30μ" Au	200μ" Sn/Pb	30μ" Au	200μ" Sn