



LARGEST SELECTION OF HEAVY DUTY 50/60 Hz. TOROIDAL POWER TRANSFORMERS.

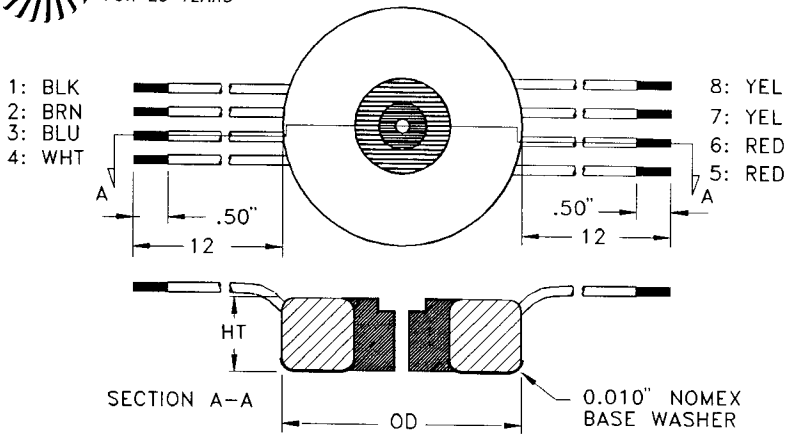

208, 220 OR 240VAC
PRIMARY ON REQUEST

PIN NUMBERS ARE
FOR REFERENCE ONLY.

For Line Voltage	115V	230V
Apply Input To:	1 & 2	1 & 4
Connect	1 to 3 and 2 to 4	2 to 3

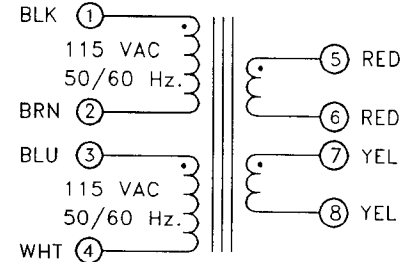

Part Number	Load Voltage	Load Current	Part Number	Load Voltage	Load Current	Part Number	Load Voltage	Load Current	Part Number	Load Voltage	Load Current	Part Number	Load Voltage	Load Current
6VA Series, 2.2"x1.1" 0.44#, 19% regulation.			2086	28	0.89	2148	2x9	4.44	2206	28	5.71	2270	2x15	13.33
2001	9	0.67	2087	2x9	1.39	2149	2x12	3.33	2207	115	1.39	2271	2x18	11.11
2002	12	0.50	2088	2x12	1.04	2150	2x15	2.67	2208	2x9	8.89	2272	2x24	8.33
2003	15	0.40	2089	2x15	0.83	2151	2x18	2.22	2209	2x12	6.67	2273	2x28	7.14
2004	18	0.33	2090	2x18	0.69	2152	2x24	1.67	2210	2x15	5.33	2274	2x48	4.17
2005	24	0.25	2091	2x24	0.52	2153	2x28	1.43	2211	2x18	4.44	2275	2x57.5	3.48
2006	28	0.21	092	2x28	0.45	2154	2x48	0.83	2212	2x24	3.33	2276	2x115	1.74
8VA Series, 2.4"x1.1" 0.53#, 18% regulation.			40VA Series, 3.2"x1.3" 1.5 #, 15% regulation.			100VA Series, 3.8"x1.4" 2.5 #, 16% regulation.			250VA Series, 4.8"x2.0" 6.2 #, 8% regulation.			600VA Series, 6.0"x2.7" 13.2 #, 5% regulation.		
2021	9	0.88	2101	9	4.44	2161	9	11.11	2222	12	20.83	2285	24	25.00
2022	12	0.67	2102	12	3.33	2162	12	8.33	2223	15	16.67	2286	28	21.42
2023	15	0.53	2103	15	2.67	2163	15	6.66	2224	18	13.89	2287	115	5.22
2024	18	0.44	2104	18	2.22	2164	18	5.55	2225	24	10.41	2289	2x12	25.00
2025	24	0.33	2105	24	1.67	2165	24	4.17	2226	28	8.93	2290	2x15	20.00
2026	28	0.28	2106	28	1.43	2166	28	3.57	2227	115	2.17	2291	2x18	16.67
12VA Series, 2.5"x1.1" 0.72#, 15% regulation.			2107	115	0.35	2167	115	0.87	2228	2x9	13.88	2292	2x24	12.50
2041	9	1.33	2108	2x9	2.22	2168	2x9	5.56	2229	2x12	10.41	2293	2x28	10.71
2042	12	1.00	2109	2x12	1.67	2169	2x12	4.17	2230	2x15	8.33	2294	2x48	6.25
2043	15	0.80	2110	2x15	1.33	2170	2x15	3.33	2231	2x18	6.94	2295	2x57.5	5.22
2044	18	0.67	2111	2x18	1.11	2171	2x18	2.78	2232	2x24	5.20	2296	2x115	2.61
2045	24	0.50	2112	2x24	0.83	2172	2x24	2.08	2233	2x28	4.46	800VA Series, 6.8"x2.7" 16.8 #, 4% regulation.		
2046	28	0.43	2113	2x28	0.71	2173	2x28	1.79	2234	2x48	2.60	2307	115	6.96
2047	2x9	0.67	2114	2x48	0.42	2174	2x48	1.04	2235	2x57.5	2.17	2311	2x18	22.22
2048	2x12	0.50	2115	2x57.5	0.35	2175	2x57.5	0.87	2236	2x115	1.09	2312	2x24	16.67
2049	2x15	0.40	2116	2x115	0.17	2176	2x115	0.43	320VA Series, 5.2"x2.2" 8.1 #, 6% regulation.			2313	2x28	14.28
2050	2x18	0.33	60VA Series, 3.3"x1.4" 1.9 #, 13% regulation.			120VA Series, 4.2"x1.5" 3.3 #, 13% regulation.			2243	15	21.33	2314	2x48	8.33
2051	2x24	0.25	2121	9	6.66	2181	9	13.33	2244	18	17.78	2315	2x57.5	6.96
2052	2x28	0.21	2122	12	5.00	2182	12	10.00	2245	24	13.33	2316	2x115	3.48
20VA Series, 2.8"x1.2" 0.92#, 16% regulation.			2123	15	4.00	2183	15	8.00	2246	28	11.42	1.2kVA Series, 7.1"x3.4" 22 #, 4% regulation.		
2061	9	2.22	2124	18	3.33	2184	18	6.66	2247	115	2.78	2327	115	10.43
2062	12	1.67	2125	24	2.50	2185	24	5.00	2248	2x9	17.77	2332	2x24	25.00
2063	15	1.33	2126	28	2.14	2186	28	4.29	2249	2x12	13.33	2333	2x28	21.42
2064	18	1.11	2127	115	0.52	2187	115	1.04	2250	2x15	10.67	2334	2x48	12.50
2065	24	0.83	2128	2x9	3.33	2188	2x9	6.66	2251	2x18	8.89	2335	2x57.5	10.43
2066	28	0.71	2129	2x12	2.50	2189	2x12	5.00	2252	2x24	6.67	2336	2x115	5.22
2067	2x9	1.11	2130	2x15	2.00	2190	2x15	4.00	2253	2x28	5.71	2.0kVA Series, 7.8"x4.4" 36 #, 3% regulation.		
2068	2x12	0.83	2131	2x18	1.66	2191	2x18	3.33	2254	2x48	3.33	2347	115	17.39
2069	2x15	0.67	2132	2x24	1.25	2192	2x24	2.50	2255	2x57.5	2.78	2354	2x48	20.83
2070	2x18	0.555	2133	2x28	1.07	2193	2x28	2.14	2256	2x115	1.39	2355	2x57.5	17.39
2071	2x24	0.42	2134	2x48	0.63	2194	2x48	1.25	400VA Series, 5.5"x2.3" 9.4 #, 6% regulation.			2356	2x115	8.70
2072	2x28	0.36	2135	2x57.5	0.52	2195	2x57.5	1.04	2264	18	22.22	5.0kVA Series, 10.5"x5.0" 77 #, 2% regulation.		
25VA Series, 2.8"x1.3" 1.1 #, 15% regulation.			2136	2x115	0.26	2196	2x115	0.52	2265	24	16.67	2376	2x115	21.74
2081	9	2.78	80VA Series, 3.8"x1.4" 2.5 #, 13% regulation.			160VA Series, 4.5"x1.9" 4.9 #, 8% regulation.			2266	28	14.28	7.5kVA Series, 11.7"x6.0" 116 #, 2% regulation.		
2082	12	2.08	2141	9	8.88	2201	9	17.77	2267	115	3.48	2396	2x115	32.51
2083	15	1.67	2142	12	6.66	2202	12	13.33	2268	2x9	22.22			
2084	18	1.39	2143	15	5.33	2203	15	10.66	2269	2x12	16.67			
2085	24	1.04	2144	18	4.44	2204	18	8.88						
			2145	24	3.33	2205	24	6.66						
			2146	28	2.86									
			2147	115	0.70									

IMPORTANT NOTES.

- 1: All transformers have been designed for 50/60 Hz.
- 2: 60 Hz TO 400 kHz. Designs available upon request.
- 3: Custom designs tailored to your specs are made & evaluated on a 2 wk. cycle.
- 4: 100% electrostatic shielding available on all transformers with a small power derating.
- 5: Magnetic shielding & lower magnetic leakage designs for sensitive areas such as encountered in computers & audio equipment are available on all transformers.
- 6: Low profile designs are available upon request.
- 7: Amecon has the world's most complete toroidal mfg. facilities. We can machine wind toroids in excess of 50" dia & 2000 LB.