





0.5mm Spacing

SERIES

# 6250/6270

ZIF ライトアングル SMT 下接点 H=0.9mm


ZIF Right Angle SMT(Bottom Contact Type) H=0.9mm

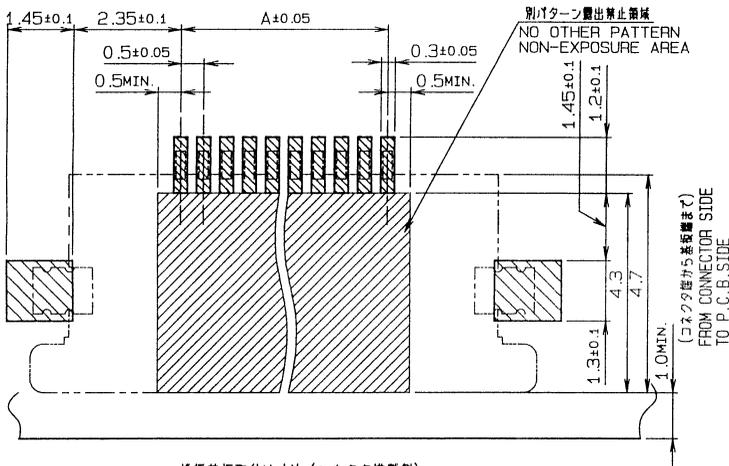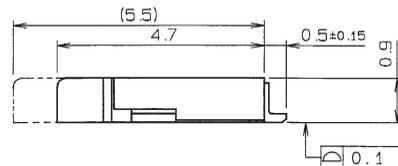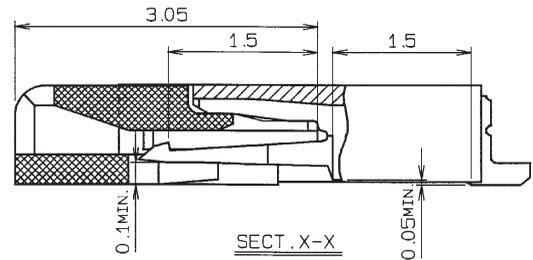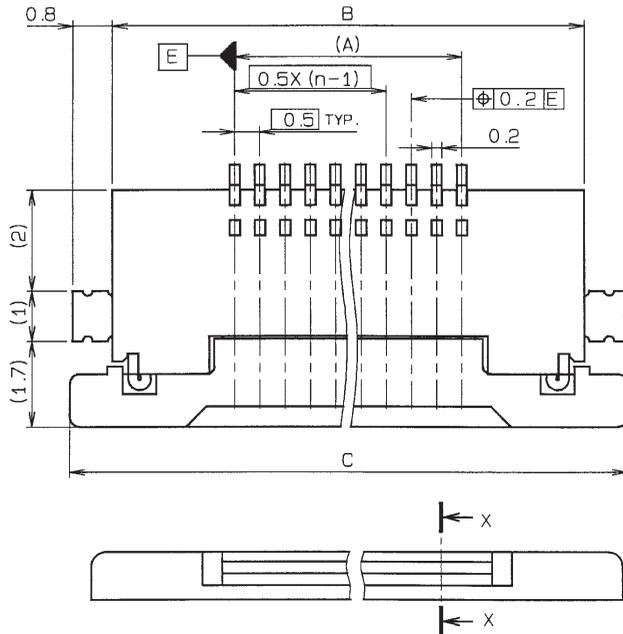

推奨基板取付け寸法 (コネクタ搭載側)

MOUNTING LAYOUT (CONN. MOUNTING SIDE)

補強板 SUPPORTING TAPE

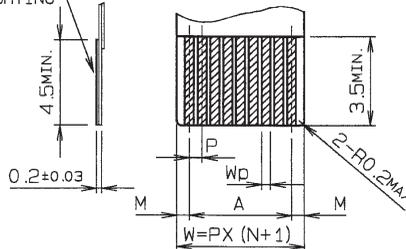

	FPC	
	1	2
M	0.5±0.12	0.5±0.1
P	0.5±0.02	0.5±0.05
A	A±0.03	A±0.05
W	W±0.07	W±0.07
Wp	0.35 <sup>+0.04</sup> <sub>-0.03</sub>	0.35±0.05

適用FPC寸法

APPLICABLE FPC

極数 NO. OF POS.	A	B	C
5	2.0	6.9	8.6
6	2.5	7.4	9.1
7	3.0	7.9	9.6
8	3.5	8.4	10.1
9	4.0	8.9	10.6
10	4.5	9.4	11.1
11	5.0	9.9	11.6
12	5.5	10.4	12.1
13	6.0	10.9	12.6
14	6.5	11.4	13.1
15	7.0	11.9	13.6
16	7.5	12.4	14.1
17	8.0	12.9	14.6
18	8.5	13.4	15.1
19	9.0	13.9	15.6
20	9.5	14.4	16.1
21	10.0	14.9	16.6
22	10.5	15.4	17.1
23	11.0	15.9	17.6
24	11.5	16.4	18.1
25	12.0	16.9	18.6
26	12.5	17.4	19.1
27	13.0	17.9	19.6
28	13.5	18.4	20.1
29	14.0	18.9	20.6
30	14.5	19.4	21.1
34	16.5	21.4	23.1

注文コード ORDERING CODE

04 6250 OXX 000 800

注文コード ORDERING CODE

04 6270 OXX 000 883

極数

NUMBER OF CONTACTS

Series 6250 800; すず合金メッキ(Tin-Plated)



Series 6270 883; 金メッキ, Au=0.1μm

0.5mm Spacing



SERIES

# 6250/6270



エンボス梱包品  
Tape and Reel Package

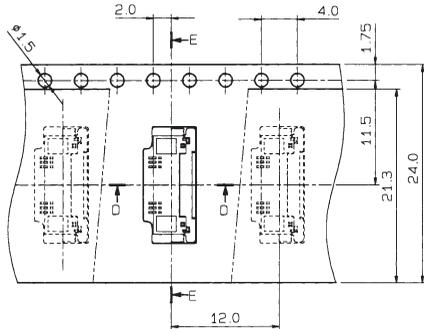


極数 NO. OF POS.	A	B
5	4.0	8.8
6	4.5	9.3
7	5.0	9.8
8	5.5	10.3
9	6.0	10.8
10	6.5	11.3
11	7.0	11.8
12	7.5	12.3
13	8.0	12.8
14	8.5	13.3

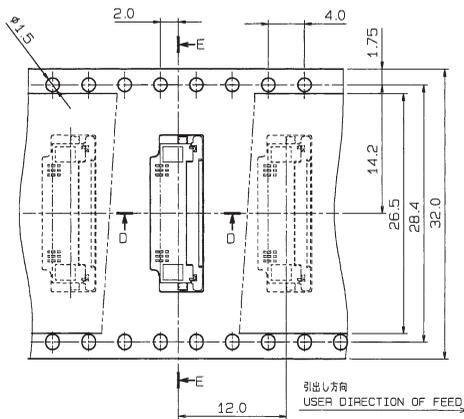

極数 NO. OF POS.	A	B
15	9.0	13.8
16	9.5	14.3
17	10.0	14.8
18	10.5	15.3
19	11.0	15.8
20	11.5	16.3

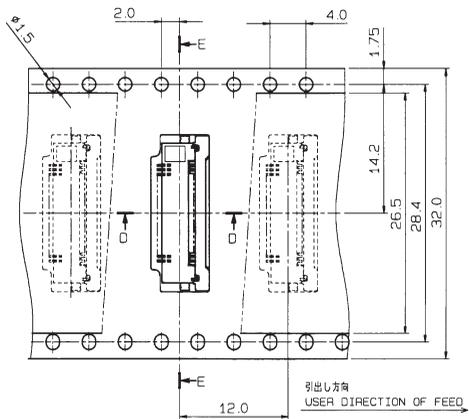

極数 NO. OF POS.	A	B
21	12.0	16.8
22	12.5	17.3
23	13.0	17.8
24	13.5	18.3
25	14.0	18.8
26	14.5	19.3
27	15.0	19.8
28	15.5	20.3
29	16.0	20.8
30	16.5	21.3



SECT. D-D

注文コード ORDERING CODE

04 6250 OXX 000 800

注文コード ORDERING CODE

04 6270 OXX 000 883

└─ 極数  
NUMBER OF CONTACTS

Series 6250 800; すず合金メッキ(Tin-Plated)  
Series 6270 883; 金メッキ、Au=0.1μm

梱包数量 2000ヶ/リール  
(2000 connectors per Tape and Reel.)