





DC26 straight plug




DC26E-XX-XX*



DC26F-XX-XX*

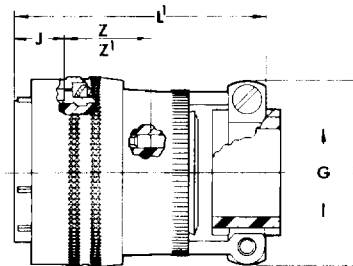

DC26F-XX-XX(SR)*



Z for pin contacts
Z' for socket contacts

*To complete order number, see page 2.

Shell Size	Q Dia. Max	L Max.	N Max.	L ¹ Max.	L ² Max.	G +.010 -.025 Dia. Free	F Max.	E Min.	H Radius ±.015	C Closed Max.	Z ±.045	Z' ±.045	J ±.010
10	.859	1.328	.691	1.922	2.281	.188	.891	.297	.113	.187	.640	.579	.353
12	1.031	1.328	.827	1.922	2.281	.312	1.016	.422	.150	.281	.640	.579	.353
14	1.156	1.328	.941	1.922	2.531	.375	1.141	.547	.188	.325	.640	.579	.353
16	1.281	1.328	1.067	2.000	2.531	.500	1.203	.609	.223	.325	.640	.579	.353
18	1.391	1.328	1.191	2.000	2.531	.625	1.469	.734	.281	.456	.640	.579	.353
20	1.531	1.297	1.327	2.109	2.406	.625	1.469	.734	.281	.519	.578	.517	.415
22	1.656	1.297	1.452	2.109	2.406	.750	1.656	.922	.303	.519	.578	.517	.415

All dimensions for reference only