



25 or 50 Mil Pitch, Termination Resistor/Capacitor Networks

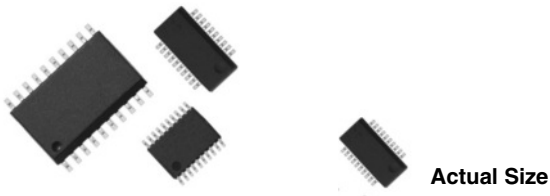

Small Outline, Surface Mount, EMI/RFI Reduction, Terminator Networks

Vishay Thin Film's termination RC network Schematic AC, can support 18 data lines reducing overall cost. Impedance matching of transmission lines is easily done using VTF thin film integrated RC networks. Our product is designed with all components integrated within a single die. It is then packaged in JEDEC standard plastic packages. The use of surface mount technology offers improved design capability through reduced parasitic inductance and capacitance. Available packages SOIC, SSOP and TSSOP.

SCHEMATIC AC

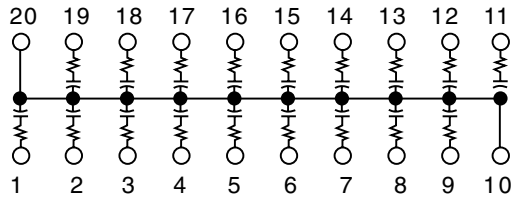

FEATURES

- Lead (Pb)-free available
- Resistors and capacitors on a single chip
- Saves board space
- Reduces total assembly costs
- Uniform performance characteristics
- Compatible with automatic surface mounting equipment
- UL 94V-0 flame resistant
- Rugged, molded case construction



TYPICAL PERFORMANCE

	TCR	TOLERANCE
RESISTOR	200	10 %
	TCC	TOLERANCE
CAPACITOR	200	20 %

MODELS			STANDARD VALUES	
VSORC	VSSRC	VTSRC	R (Ohms)	C (pF)
X			50	220
	X		50	250
	X		75	56
X			100	100

STANDARD ELECTRICAL SPECIFICATIONS

TEST	SPECIFICATIONS	CONDITION
MATERIAL	TANTALUM NITRIDE ON SILICON	
Resistance Range	10 Ohms to 750 Ohms	
TCR:	Tracking	± 10 ppm/°C
	Absolute	± 200 ppm/°C
Tolerance:	Absolute	± 10 % Standard (R)
	Absolute	± 20 % Standard (C)
Power Rating:	Package	1 W - (T)SSOP. 1.2 W - SOIC
Capacitance Range	10 pF to 150 pF - TSSOP/10 pF to 250 pF - SOIC and SSOP	
Stability:	ΔR Ratio	± 2 %
ESD Protection	> 2 kV	MIL-STD-883, Method 3015
Breakdown Voltage	35 - 50 V	
Operating Temperature Range	0 °C to + 70 °C	
Storage Temperature Range	- 55 °C to + 125 °C	
Power Rating/Resistor	100 mW	



* Pb containing terminations are not RoHS compliant, exemptions may apply



VTSRC, VSSRC, VSORC-AC

25 or 50 Mil Pitch, Termination Resistor/Capacitor Networks Vishay Thin Film

DIMENSIONS AND IMPRINTING in inches and millimeters



MODEL	VTSRC20-AC		VSSRC20-AC		VSORC20-AC	
	INCHES	MILLIMETERS	INCHES	MILLIMETERS	INCHES	MILLIMETERS
A	0.256 ± 0.003	6.5 ± 0.08	0.344 Max.	8.74 Max.	0.500 ± 0.010	12.7 ± 0.25
B (Ref.)	0.025	0.65	0.025	0.64	0.050	1.27
C (Ref.)	0.0087	0.22	0.010	0.25	0.016	0.41
D	0.004	0.10	0.006	0.15	0.008	0.20
E (Typ.)	0.024	0.61	0.025	0.64	0.030	0.76
F	0.173 ± 0.003	4.39 ± 0.08	0.154 ± 0.003	3.9	0.293 ± 0.003	7.44
G	0.015 × 45°	0.38	0.015 × 45°	0.38	0.025 × 45°	0.64
H	0.252 ± 0.005	6.4 ± 0.13	0.236 ± 0.008	6.0 ± 0.20	0.406 ± 0.005	10.31
J (Ref.)	0.005	0.13	0.010	0.25	0.010	0.25
W	0.043 ± 0.005	1.09 ± 0.13	0.064 ± 0.005	1.6	0.100 ± 0.005	2.59


IMPRINTING

VSORC, VSSRC, VTSRC	20	AC	XXX / XXX
MODEL	PIN COUNT	SCHEMATIC	RESISTANCE / CAPACITANCE
			Code: e.g. 100 = 10 ohm / 101 = 100 pF
		XXXX Date Code	* Optional marking

MECHANICAL SPECIFICATIONS

Resistive Element	Tantalum Nitride
Substrate Material	Silicon
Body	Molded Epoxy
Terminals	Copper Alloy
Plating	Tin Lead
Lead Coplanarity	0.0005 Inches
Marking Resistance to Solvents	Permanency testing per MIL-STD-202, Method 215
Lead (Pb)-free Option	100 % Sn Matte
Lead (Pb)-free Finish	Plated

DERATING CURVE

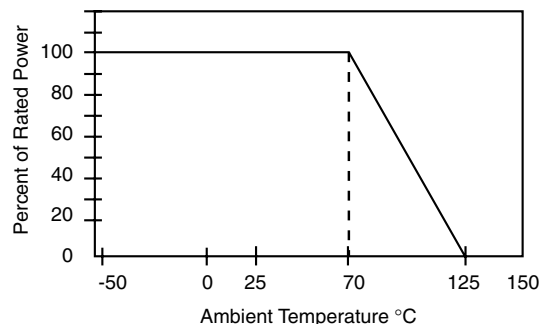

PACKING INFORMATION

MODEL	LEADS	TAPE AND REEL	TUBES
VTSRC (TSSOP)	20	2500	74
VSSRC (SSOP)	20	2500	55
VSORC (SOIC)	20	1000	38



GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: VSSRC20AC330470T1 (preferred part number format)

V S S R C 2 0 A C 3 3 0 4 7 0 T 1

GLOBAL MODEL	NUMBER OF LEADS/ SCHEMATICS	RESISTANCE & TOLERANCE/ CAPACITANCE & TOLERANCE	PACKAGING
VSSRC VTSRC VSORC (Lead (Pb)-free) (e1)	20AC	xxxxyy First 2 digits are significant figures. Last digit specifies number of zeroes to follow. K = 10 % Capacitor Tol. fixed M = 20 % Resistance Tol. fixed	UF = TUBED TAPE AND REEL T0 = 100 Min 100 Mult T1 = 1000 Min 1000 Mult T3 = 300 Min 300 Mult T5 = 500 Min 500 Mult TF = Full Reel 2500 TS = 100 Min 1 Mult

Historical Part Number example: VSSRC20AC330K470MT/R (will continue to be accepted)

VSSRC	20	AC	330K	470M	T/R
MODEL	NUMBER OF LEADS	SCHEMATIC	RESISTANCE	TOLERANCE	PACKAGING



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.